


环保物料

Pin数	尺寸A	尺寸B
2	1.25	3.05
3	2.50	4.30
4	3.75	5.55
5	5.00	6.80
6	6.25	8.05
7	7.50	9.30
8	8.75	10.55
9	10.00	11.80
10	11.25	13.05
11	12.50	14.30
12	13.75	15.55
13	15.00	16.80
14	16.25	18.05
15	17.50	19.30
16	18.75	20.55
17	20.00	21.80
18	21.25	23.05
19	22.50	24.30
20	23.75	25.55
21	25.00	26.80
22	26.25	28.05
23	27.50	29.30
24	28.75	30.55
25	30.00	31.80

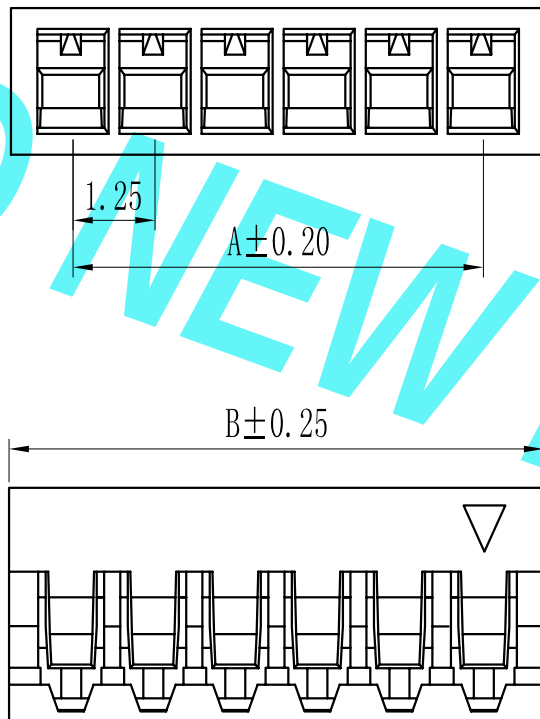

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 125V DC, AC(rms)
Rated voltage: 125V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 250V AC/minute
Withstand voltage: 250V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆塑胶: 尼龙66 (Nylon66), UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1.25T-8 (SGN)	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.11.30		0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.11.30		TITLE: 1.25mm pitch Single Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°					REV: A0	SHEET: 1/1