


# 环保物料

| 孔位<br>Poles | A    | B    | C    |
|-------------|------|------|------|
| 4           | 3.0  | 5.1  | 6.0  |
| 5           | 4.0  | 6.1  | 7.0  |
| 6           | 5.0  | 7.1  | 8.0  |
| 7           | 6.0  | 8.1  | 9.0  |
| 8           | 7.0  | 9.1  | 10.0 |
| 9           | 8.0  | 10.1 | 11.0 |
| 10          | 9.0  | 11.1 | 12.0 |
| 11          | 10.0 | 12.1 | 13.0 |
| 12          | 11.0 | 13.1 | 14.0 |
| 13          | 12.0 | 14.1 | 15.0 |
| 14          | 13.0 | 15.1 | 16.0 |
| 15          | 14.0 | 16.1 | 17.0 |
| 16          | 15.0 | 17.1 | 18.0 |
| 17          | 16.0 | 18.1 | 19.0 |
| 18          | 17.0 | 19.1 | 20.0 |
| 19          | 18.0 | 20.1 | 21.0 |
| 20          | 19.0 | 21.1 | 22.0 |
| 21          | 20.0 | 22.1 | 23.0 |
| 22          | 21.0 | 23.1 | 24.0 |
| 23          | 22.0 | 24.1 | 25.0 |
| 24          | 23.0 | 25.1 | 26.0 |
| 25          | 24.0 | 26.1 | 27.0 |
| 26          | 25.0 | 27.1 | 28.0 |
| 27          | 26.0 | 28.1 | 29.0 |
| 28          | 27.0 | 29.1 | 30.0 |
| 29          | 28.0 | 30.1 | 31.0 |
| 30          | 29.0 | 31.1 | 32.0 |
| 31          | 30.0 | 32.1 | 33.0 |
| 32          | 31.0 | 33.1 | 34.0 |
| 33          | 32.0 | 34.1 | 35.0 |
| 34          | 33.0 | 35.1 | 36.0 |
| 35          | 34.0 | 36.1 | 37.0 |
| 36          | 35.0 | 37.1 | 38.0 |
| 37          | 36.0 | 38.1 | 39.0 |
| 38          | 37.0 | 39.1 | 40.0 |
| 39          | 38.0 | 40.1 | 41.0 |
| 40          | 39.0 | 41.1 | 42.0 |

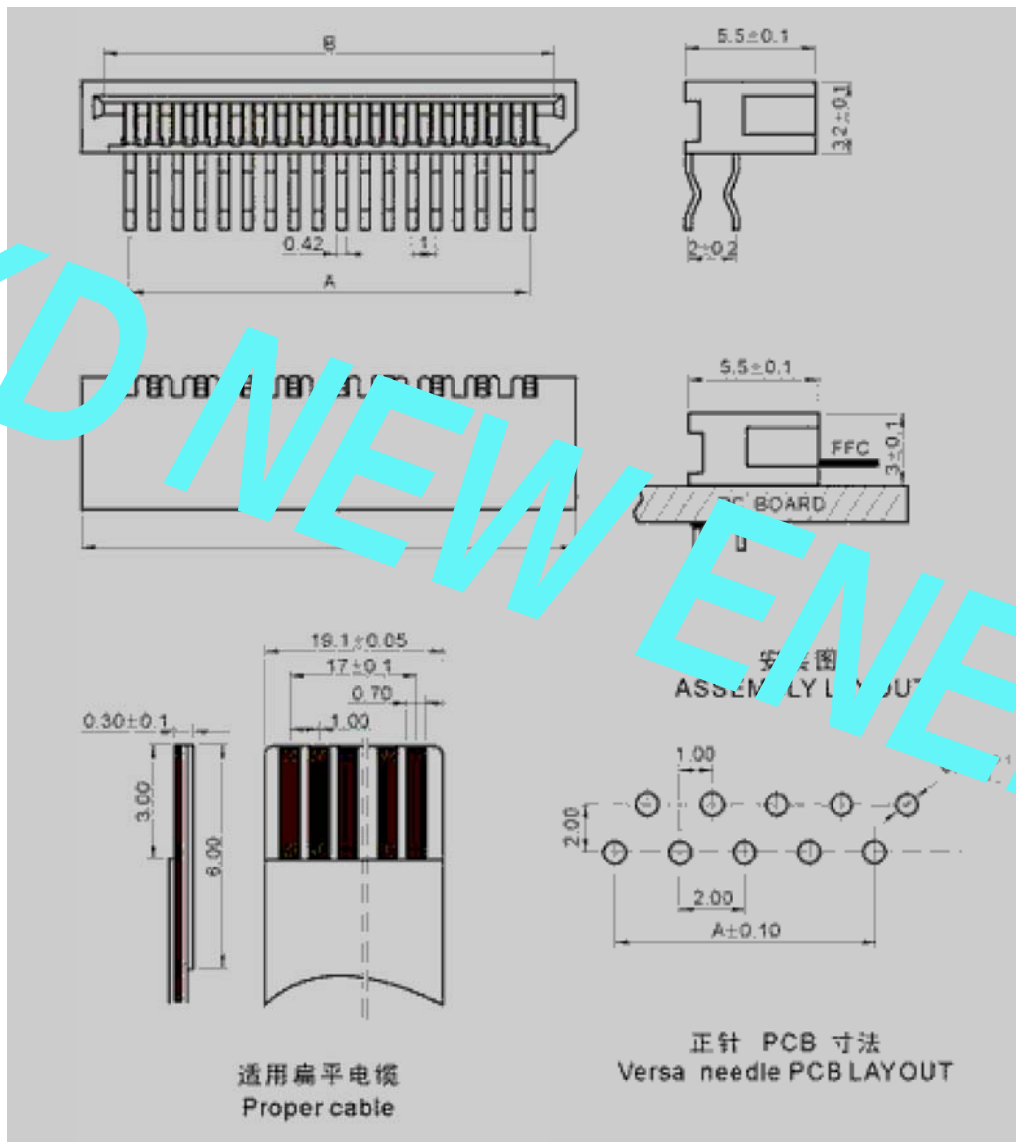


## 技术参数SPECIFICATIONS

极数: 4~40  
Poles: 4~40  
额定电压: AC, DC, 50V (50HZ有效值)  
Voltage rating: AC, DC, 50V (50HZ有效值)  
额定电流: 0.5A, AC, DC  
Current rating: 0.5A, AC, DC  
耐压值: 500V AC/minute  
Withstang voltage: 500V AC/minute  
工作温度: -25℃~+85℃  
Working Temperature: -25℃~+85℃  
绝缘电阻: ≥800MΩ  
Insulation resistance: ≥800MΩ  
接触电阻: ≤0.02Ω  
Contact resistance: ≤0.02Ω  
单面接触  
Single Contact

## 接触件TERMINAL

材质: 磷青铜  
Material: Phosphor Bronze  
胶主料 HOUSING  
材质: 尼龙4, UL 94V-0  
Material: Nylon, UL 94V-0  
包装方式 PACKAGE  
管装 Pipe Package  
盒装 Box Package



| REV. | 新图面发行           | 2018. 11. 29 | UNIT: MM | GENERAL TOLERANCES |          | SCALE: 1:1 | NAME | DATE         | 东莞市康号新能源科技有限公司<br>DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD<br>公司网址: www.dgconne.cn 公司电话: 0769-85337833<br>邮箱: 2850175988@qq.com 公司传真: 0769-85392827 | PART. NO:<br>FPC 1.0A-WX1 |
|------|-----------------|--------------|----------|--------------------|----------|------------|------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
|      |                 |              |          | LINEAR             | ANGLES   |            |      |              |                                                                                                                                                        |                           |
| A0   | 新图面发行           | 2018. 11. 29 | UNIT: MM | 0.00±0.15          | X° ±3°   | APPROVED   |      |              |                                                                                                                                                        |                           |
| REV. | REVISION RECORD | DATE         | SIZE: A4 | 0.000±0.08         | X° X'±2° | DESIGNER   |      |              | TITLE:<br>1.00mm pitch Single Wafer                                                                                                                    | DWG. NO:<br>KDFPC-0017    |
|      |                 |              |          |                    |          | DRAWN      | 肖丽娟  | 2018. 11. 29 | REV: A0                                                                                                                                                | SHEET: 1/1                |