
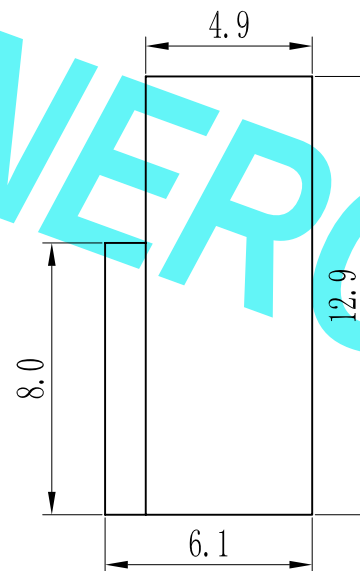
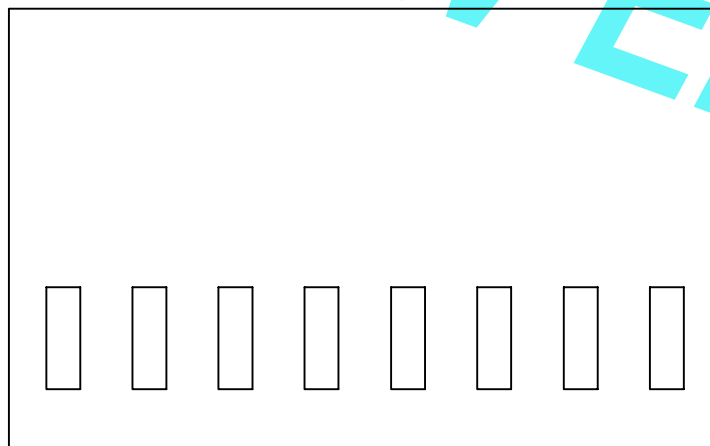


环保物料

Pin数	尺寸A	尺寸B
2	2.54	5.80
3	5.08	8.34
4	7.62	10.88
5	10.16	13.42
6	12.70	15.96
7	15.24	18.50
8	17.78	21.04
9	20.32	23.58
10	22.86	26.12
11	25.40	28.66
12	27.94	31.20
13	30.48	33.74
14	33.02	36.28
15	35.56	38.82
16	38.10	41.36
17	40.64	43.90
18	43.18	46.44
19	45.72	48.98
20	48.26	51.52
21	50.80	54.06
22	53.34	56.60
23	55.88	59.14
24	58.42	61.68
25	60.96	64.22

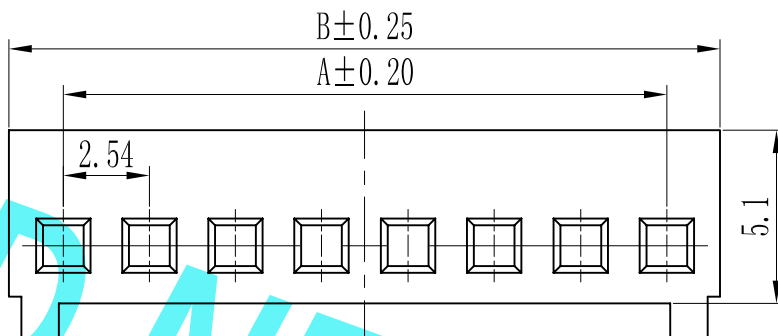

技术参数 SPECIFICATIONS

- ◆间距: 2.54 Pitch:2.54
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 3.0A, AC, DC
Current rating:3.0A, AC, DC
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

REV.	新图面发行	2018. 12. 10	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°			
				0.00±0.15	X° ±3°			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 10


东莞市康导新能源科技有限公司
 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD
 公司网址: www.dgoonne.cn 公司电话: 0769-85337533
 邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE: 2.54mm pitch Single Housing

PART. NO:	2510-NY	
DWG. NO:		
REV:	A0	SHEET: 1/1