




环保物料

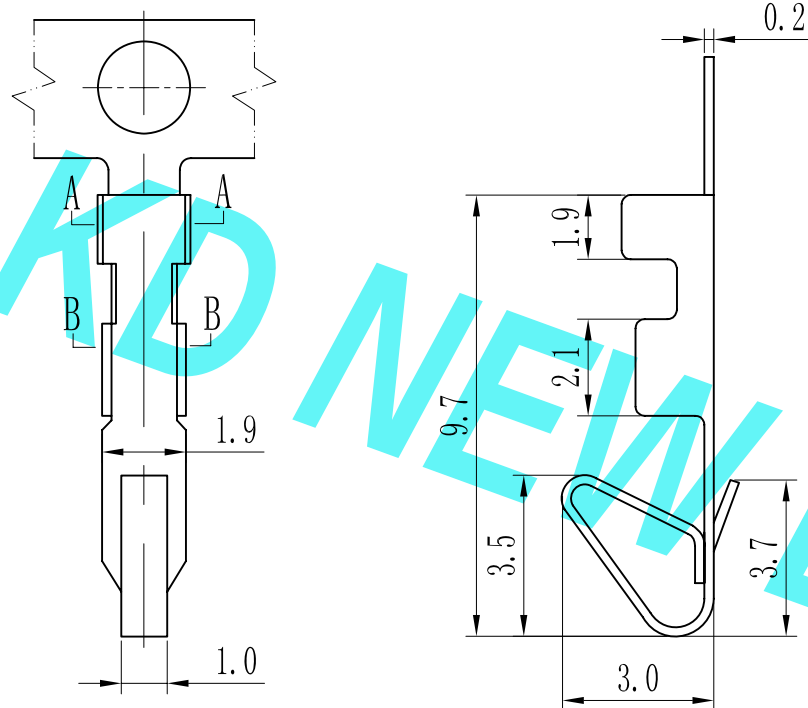

Section: A-A



Section: B-B

NOTE:

1. MATERIAL: Phosphor Bronze, JIS C25191R-H, HV 200° ±5°
T=0.20mm
2. Along any portion of strip, allowable camber is 0.04mm per 1000mm length max. And allowable twist is 45° per 1000mm length max.
3. All corners and radii have a maximum Radius of 0.1mm unless otherwise specified.

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 2510-T	
				LINEAR	ANGLES	APPROVED					
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.12.10	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				DWG. NO:	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.10		TITLE: 2.54mm pitch Crimp Terminal	
									REV: A0	SHEET: 1/1	