


环保物料

Pin数	尺寸A	尺寸B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50

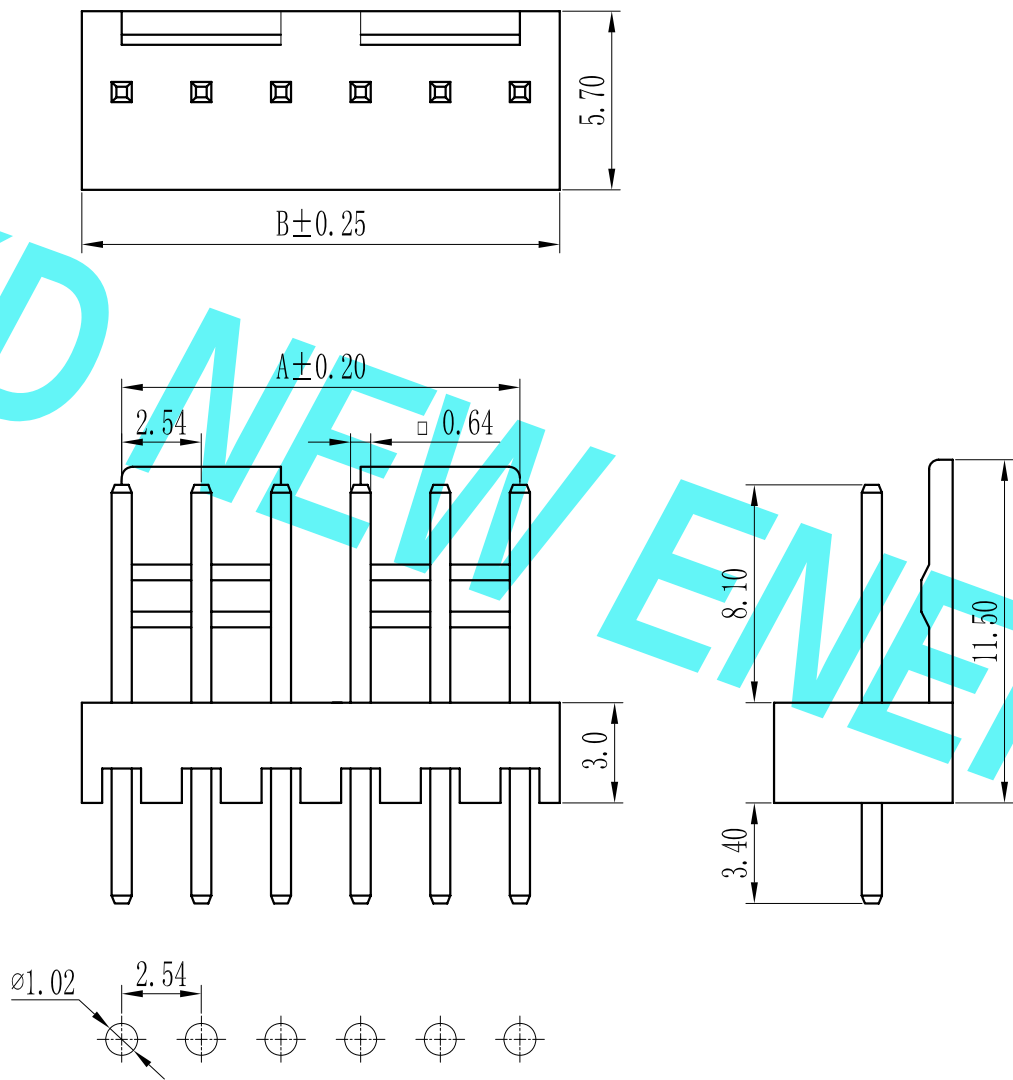

- 技术参数
 SPECIFICATIONS
- ◆间距: 2.54 Pitch:2.54
 - ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
 - ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
 - ◆额定电流: 3.0A, AC, DC
Current rating:3.0A, AC, DC
 - ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
 - ◆工作温度 : -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻 : ≥1000MΩ
Insulation resistance:≥1000MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

- 材料
 MATERIAL
- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0
 - ◆接触针: 磷青铜
Contact PIN: Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 2512S-XX
				LINEAR	ANGLES	APPROVED				DWG. NO:
				0.0±0.25	X° REF±6°	DESIGNER				REV: A0
A0	新图面发行	2018.12.10	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.12.10		SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°				TITLE: 2.54mm pitch Single Wafer	