
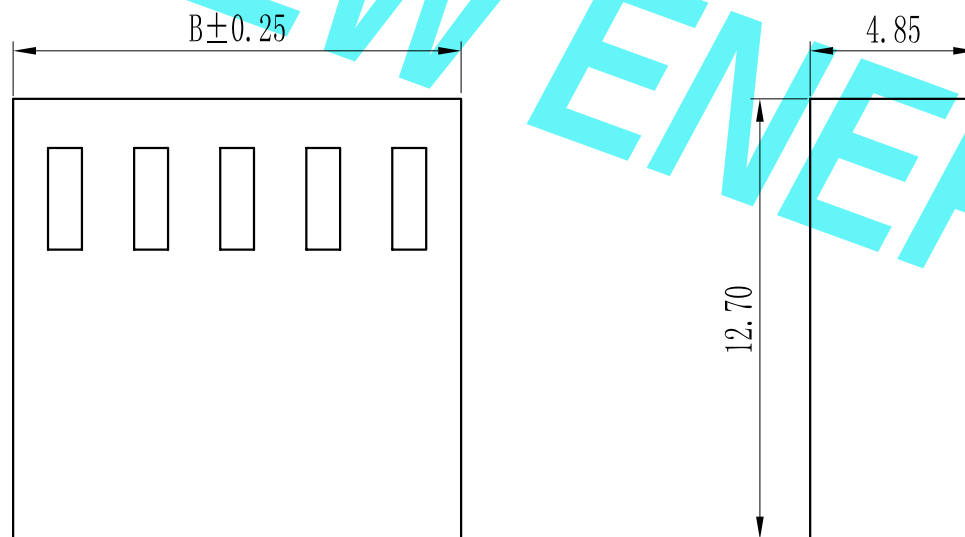


Pin数	尺寸A	尺寸B
2	2.54	5.80
3	5.08	8.34
4	7.62	10.88
5	10.16	13.42
6	12.70	15.96
7	15.24	18.50
8	17.78	21.04
9	20.32	23.58
10	22.86	26.12
11	25.40	28.66
12	27.94	31.20
13	30.48	33.74
14	33.02	36.28
15	35.56	38.82
16	38.10	41.36
17	40.64	43.90
18	43.18	46.44
19	45.72	48.98
20	48.26	51.52
21	50.80	54.06
22	53.34	56.60
23	55.88	59.14
24	58.42	61.68
25	60.96	64.22

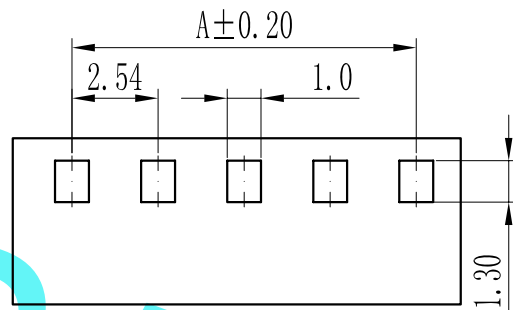

- ◆间距：2.54 Pitch:2.54
- ◆适用线规：AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压：AC, DC, 250V（有效值）
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流：3.0A, AC, DC
Current rating:3.0A, AC, DC
- ◆耐压值：1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度：-25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻： $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻： $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

◆绝缘体：尼龙66, UL94-0
Insulator: Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonns.cn 公司电话: 0769-85337633 邮 箱: 2860175866@qq.com 公司传真: 0769-85392827	PART. NO: 2510S-XX	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018. 12. 10		UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 2.54mm pitch Single Housing
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 10			

 **东莞市康导新能源科技有限公司**
DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD

公司地址: www.dgoonne.cn 公司电话: 0769-85337633
邮箱: 2860175066@qq.com 公司传真: 0769-85362827

PART. NO: 2510S-XX

DWG. NO:

2.54mm pitch Single Housing

REV: A0	SHEET: 1 / 1
---------	--------------