


环保物料

插座(Receptacle housing)

28001-2R (110)




28001-3R (110)

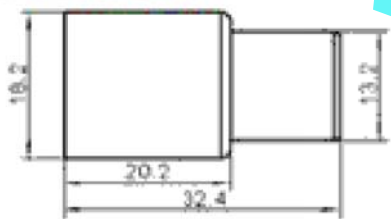



28001-4R (110)



28001-4R (110)

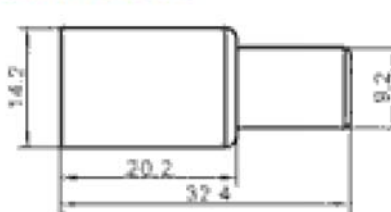

28001-9R (110)

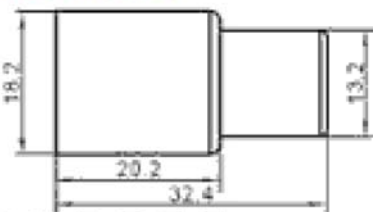

技术参数

线数:2、3、4、6、9

适用线规:AWG22#-16#

温度范围:-20℃~+105℃

额定电压:250V AC/DC

额定电流:8A

接触电阻:≤0.01Ω

绝缘电阻:≥1000MΩ

耐压:1000V AC/1分钟 (Minute)

材料:

插头:尼龙 UL94V-2

阻燃ABS UL94V-0

插座:尼龙 UL94V-2

阻燃ABS UL94V-0

端子:磷铜 黄铜



GENERAL TOLERANCES

LINEAR

ANGLES

0.0±0.25

X° REF±6°

0.00±0.15

X° ±3°

0.000±0.08

X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2018.12.10



东莞市康导新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgkonne.cn

公司电话: 0769-85337533

邮箱: 2850175986@qq.com

公司传真: 0769-85392827

PART. NO:

28001-XR (110)

DWG. NO:

REV: A0

SHEET: 1/1

A0 新图面发行 2018.12.10

REV. REVISION RECORD DATE

UNIT: MM

SIZE: A4