

环保物料

技术参数 SPECIFICATIONS

线数

(Poles):1、2、3、4、6、9、12、15

适用线规 (Applicable wires):AWG26#
~20#

适应基板厚度 (Applicable PC board
thickness):1.6~2.0mm

温度范围 (Temperature range):-25℃
~+105℃

额定电压 (Voltage
rating):300V.AC/DC

额定电流 (Current rating):13-8A

接触电阻 (Contact
resistance):≤0.01Ω

绝缘电阻 (Insulation
resistance):≥1000MΩ

耐压 (Withstand voltage):1500V.AC/1
分钟 (Minute)

材料 (Material):

插头 (Plug housing):尼龙


(Nylon) UL94V-0

插座 (Receptacle housing):尼
龙 (Nylon) UL94V-0

端子(Terminal):磷青铜
(Phos.bronze Tin/plated)

黄铜 (Brass

Tin/plated)

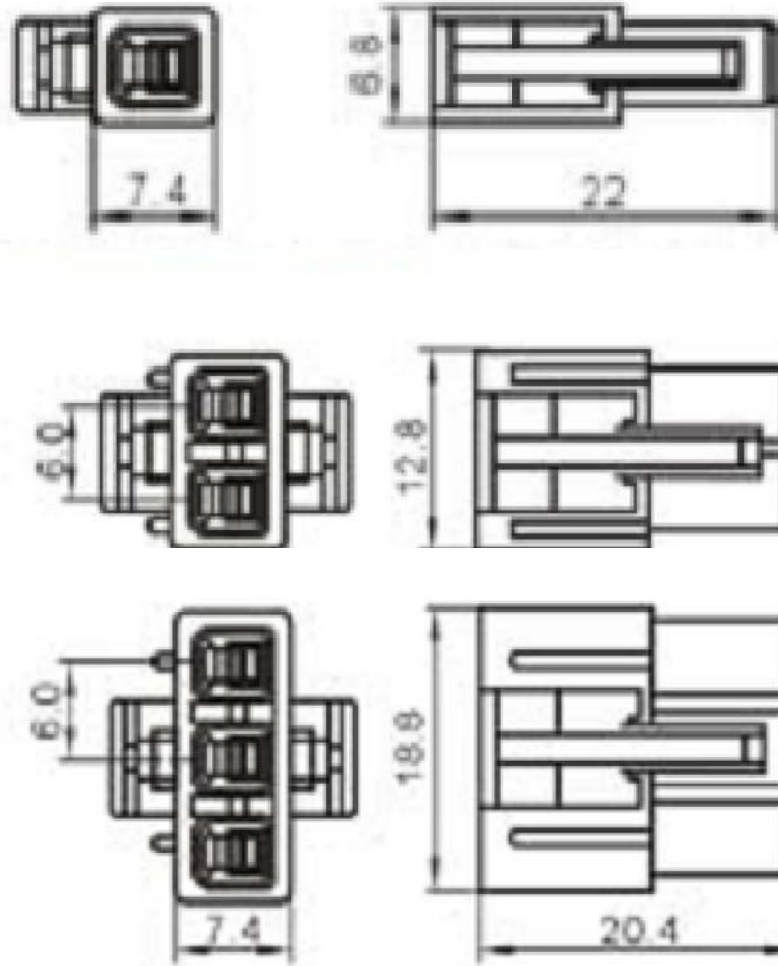

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgkonne.cn 公司电话: 0769-85337633 邮 箱: 2850175988@qq.com 公司传真: 0769-85392827	PART. NO: KD180XX-XP			
				LINEAR	ANGLES					APPROVED			
				0. 0±0. 25	X° REF±6°								
A0	新图面发行	2018. 12. 04		UNIT: MM	0. 00±0. 15	X° ±3°	DESIGNER				DWG. NO:		
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 04	TITLE: 1.80mm pitch Single Housing			REV: A0	SHEET: 1/1