


环保物料

技术参数 SPECIFICATIONS

线数
(Poles):1、2、3、4、6、9、12、15
适用线规 (Applicable wires):AWG26#~20#
适应基板厚度 (Applicable PC board thickness):1.6~2.0mm
温度范围 (Temperature range):-25℃~+105℃
额定电压 (Voltage rating):300V.AC/DC
额定电流 (Current rating):13-8A
接触电阻 (Contact resistance):≤0.01Ω
绝缘电阻 (Insulation resistance):≥1000MΩ
耐压 (Withstand voltage):1500V.AC/1分钟 (Minute)
材料 (Material):
插头 (Plug housing):尼龙 (Nylon) UL94V-0
插座 (Receptacle housing):尼龙 (Nylon) UL94V-0
端子(Terminal):磷青铜 (Phos.bronze Tin/plated)
黄铜 (Brass Tin/plated)

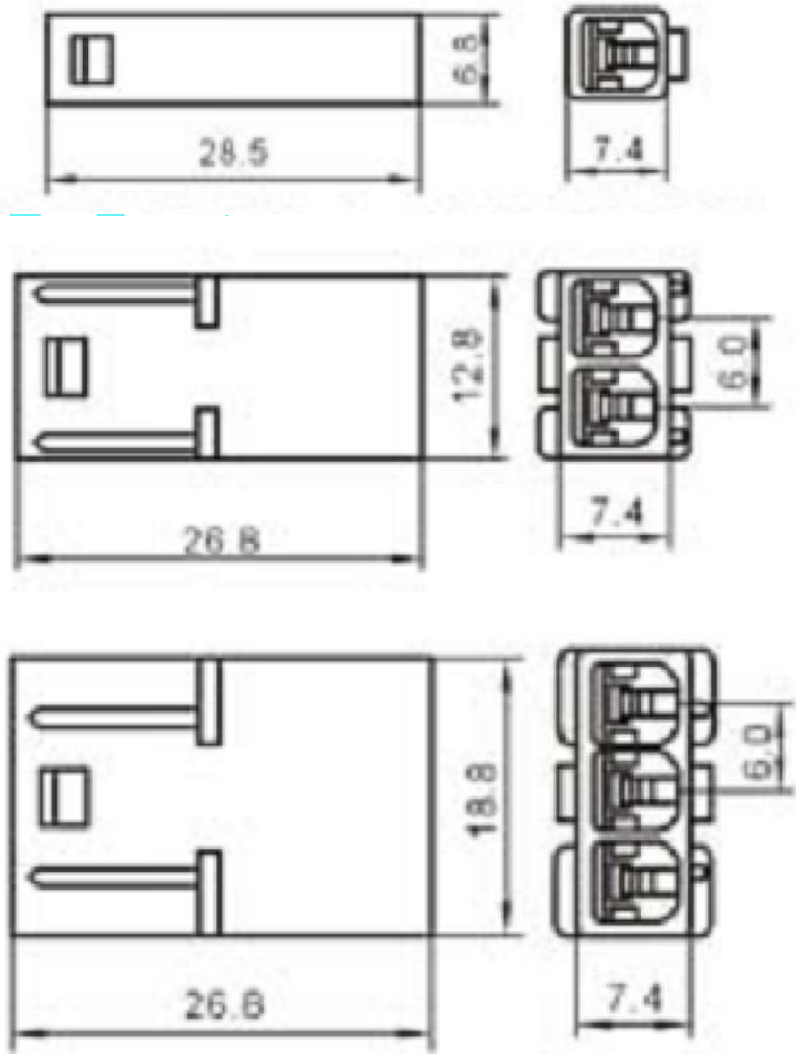

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337633 销售热线: 2850175988@qq.com 公司传真: 0769-85392827	PART. NO: KD180XX-XRF		
				LINEAR	ANGLES	APPROVED						DWG. NO:
				0.0±0.25	X° REF±6°							
AO	新图面发行	2018.12.04	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 1.80mm pitch Single Housing	REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.04				