


环保物料


技术参数 SPECIFICATIONS

线数 (Poles):1、2、3、4
适用线规 (Applicable wires):AWG26#
~20#
适应基板厚度 (Applicable PC board thickness):1.6~2.0mm
温度范围 (Temperature range):-25℃
~+105℃
额定电压 (Voltage rating):300V.AC/DC
额定电流 (Current rating):12A
接触电阻 (Contact resistance):≤0.01Ω
绝缘电阻 (Insulation resistance):≥1000MΩ
耐压 (Withstand voltage):1500V.AC/1分钟 (Minute)
材料 (Material):
插座 (Housing):尼龙 (Nylon)
端子 (Terminal):磷青铜
(Phos.bronze Tin/plated)


1D1.8K-1Y(610596)

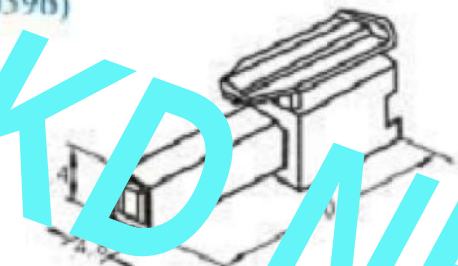


1D1.8K-3Y(610606)

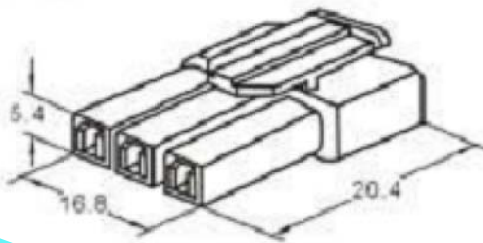

1D1.8K-2Y(610599)

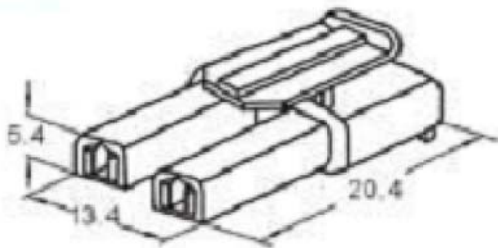

1D1.8K-4Y(610471)

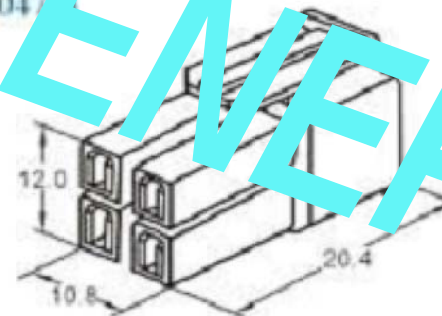

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337633 邮 箱: 2850175988@qq.com 公司传真: 0769-85392827	PART. NO: KD1.8K-XY			
				LINEAR	ANGLES					APPROVED			DWG. NO:
				0.0±0.25	X° REF±6°								
AO	新图面发行	2018.12.04	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE:	1.80mm pitch Single Housing		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.04		REV: A0			