

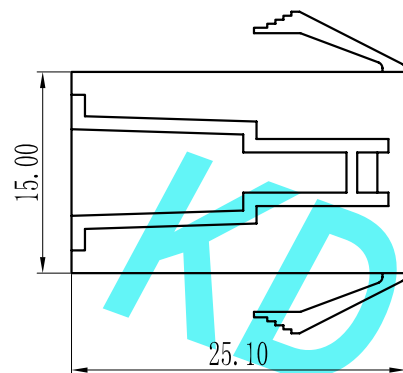



环保物料

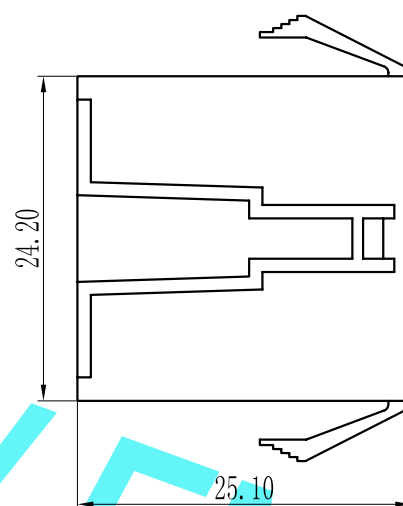

6613F-3×03

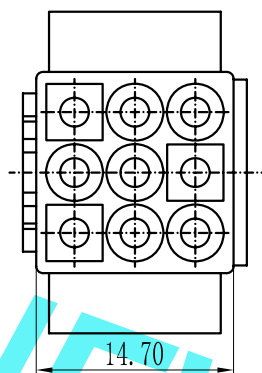

6613F-3×05

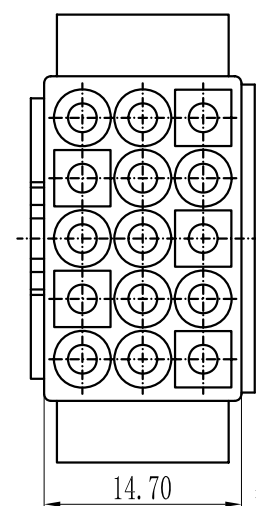


技术参数 SPECIFICATIONS


- ◆间距: 4.5 Pitch:4.5
- ◆适用线规: AWG#26-#16
Applicable Wire:AWG#26-#16
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)
- ◆额定电流: 6.0-10.0A, AC, DC
Current rating:6.0-10.0A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1500MΩ
Insulation resistance:≥1500MΩ
- ◆接触电阻: ≤15mΩ
Contact resistance:≤15mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0

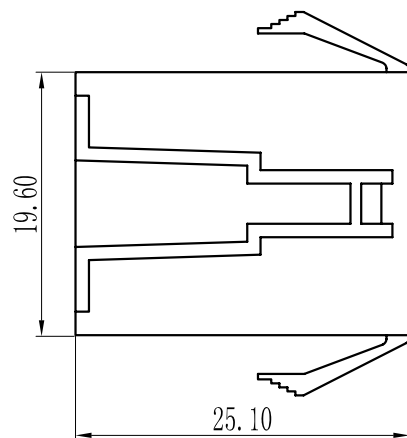

6613F-3×04

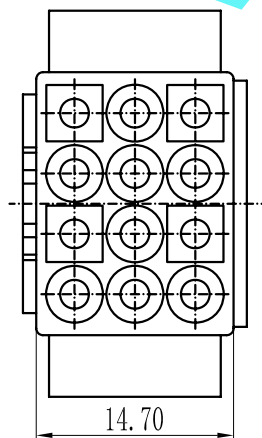

GENERAL TOLERANCES

LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2018.12.12



东莞市康导新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgoonne.cn

公司电话: 0769-85337633

邮箱: 2850175986@qq.com

公司传真: 0769-85392827

TITLE:

4.50mm pitch Three Housing

PART. NO:

6613F-3×XX

DWG. NO:

REV: A0

SHEET: 1/1

REV.	REVISION RECORD	DATE	SIZE: A4
A0	新图面发行	2018.12.12	UNIT: MM