

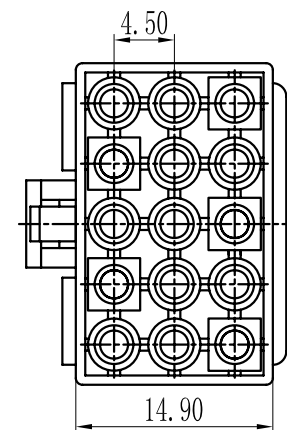
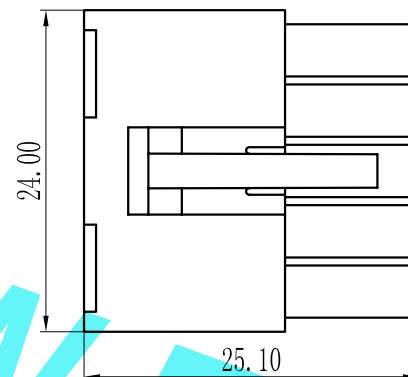

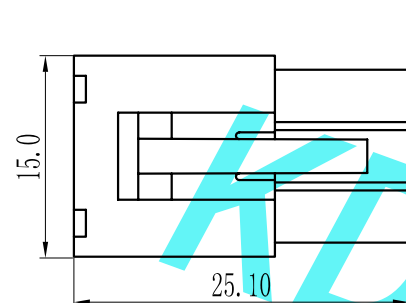


环保物料

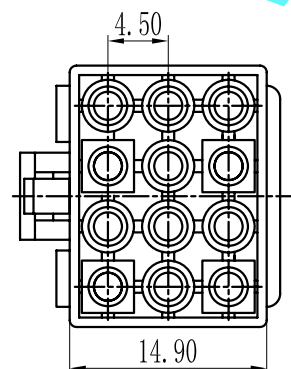

6613M-3×03

6613M-3×05

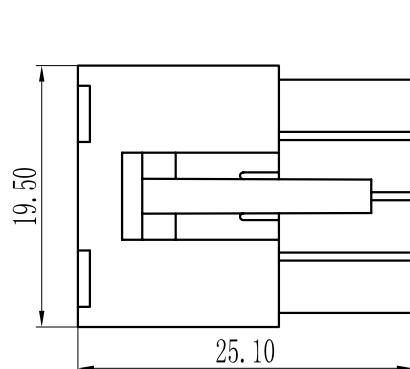

6613M-3×04

技术参数 SPECIFICATIONS

- ◆间距: 4.5 Pitch:4.5
- ◆适用线规: AWG#26-#16
Applicable Wire:AWG#26-#16
- ◆额定电压: AC,DC, 300V (有效值)
Voltage rating: AC,DC, 300V(rms)
- ◆额定电流: 6.0-10.0A, AC, DC
Current rating:6.0-10.0A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1500M\Omega$
Insulation resistance: $\geq 1500M\Omega$
- ◆接触电阻: $\leq 15m\Omega$
Contact resistance: $\leq 15m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0



GENERAL TOLERANCES

LINEAR ANGLES

0.0±0.25 X° REF±6°

0.00±0.15 X° ±3°

0.000±0.08 X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2018.12.12



东莞市康导新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgoonne.cn

公司电话: 0769-85337633

邮箱: 2850175988@qq.com 公司传真: 0769-85392827

TITLE:

4.50mm pitch Three Housing

PART. NO:

6613M-3×XX

DWG. NO:

REV: A0

SHEET: 1/1

A0

新图面发行

2018.12.12

UNIT: MM

REV.

REVISION RECORD

DATE

SIZE: A4

1

2

3

4

5

6

7

8