







环保物料

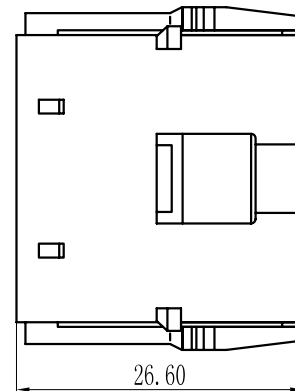



4561-2×02

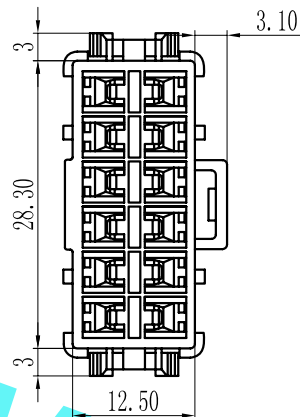



4561-2×06



4561-2×03

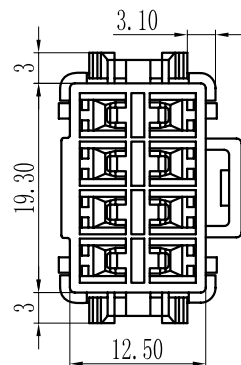

4561-2×04

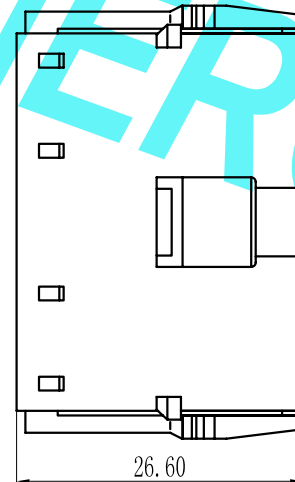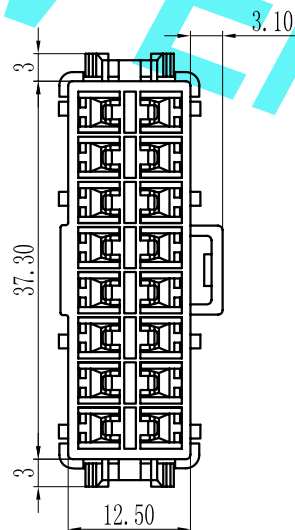

4561-2×08

技术参数 SPECIFICATIONS

- ◆间距: 4.5 Pitch:4.5
- ◆适用线规: AWG#26-#16
Applicable Wire:AWG#26-#16
- ◆额定电压: AC,DC, 300V (有效值)
Voltage rating: AC,DC, 300V(rms)
- ◆额定电流: 6.0-10.0A, AC, DC
Current rating:6.0-10.0A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1500M\Omega$
Insulation resistance: $\geq 1500M\Omega$
- ◆接触电阻: $\leq 15m\Omega$
Contact resistance: $\leq 15m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮箱: 2850175988@qq.com 公司传真: 0769-85392827	PART. NO: 4561-2×XX
				LINEAR	ANGLES	APPROVED				DWG. NO:
A0	新图面发行	2018. 12. 12		0.0±0.25	X° REF±6°	DESIGNER				
REV.	REVISION RECORD	DATE		0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018. 12. 12		REV: A0 SHEET: 1/1
				0.000±0.08	X° X'±2°					

TITLE:
4.50mm pitch Dual Housing