



环保物料

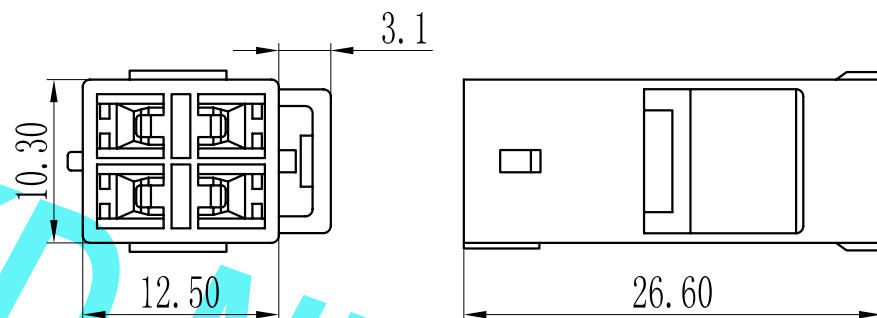

4561S-2×02

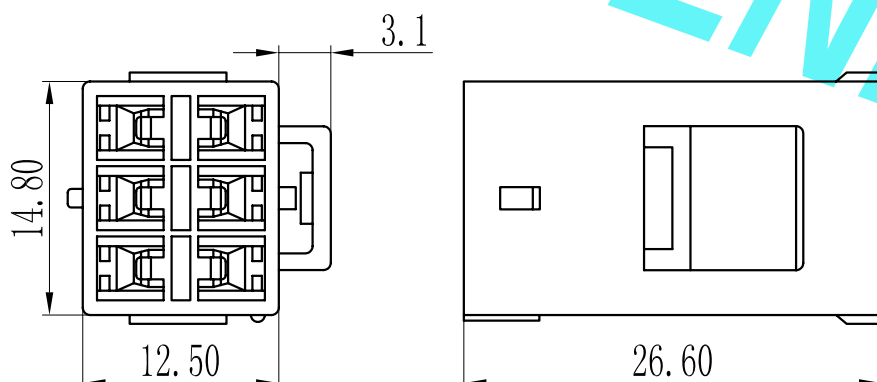

4561S-2×03

技术参数 SPECIFICATIONS

- ◆间距: 4.5 Pitch:4.5
- ◆适用线规: AWG#26-#16
Applicable Wire:AWG#26-#16
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)
- ◆额定电流: 6.0-10.0A, AC, DC
Current rating:6.0-10.0A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1500MΩ
Insulation resistance:≥1500MΩ
- ◆接触电阻: ≤15mΩ
Contact resistance:≤15mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175988@qq.com 公司传真: 0769-85392827	PART. NO: 4561S-2×XX		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
				0.0±0.25	X° REF±6°							
A0	新图面发行	2018.12.12		UNIT: MM	0.00±0.15		X° ±3°	DESIGNER				TITLE:
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.12	4.50mm pitch Dual Housing		REV: A0	SHEET: 1/1