


环保物料

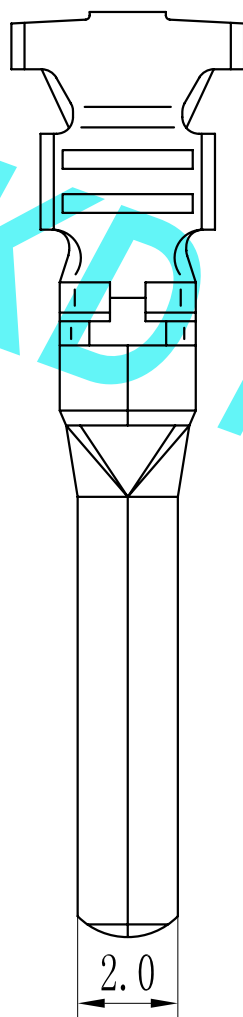

技术参数 SPECIFICATIONS

- ◆间距: 4.5 Pitch:4.5
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V (rms)
- ◆额定电流: 6.0-10A, AC, DC
Current rating: 6.0-10A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 15\text{m}\Omega$
Contact resistance: $\leq 15\text{m}\Omega$

材料 MATERIAL

- ◆端子: 磷青铜
Terminal: Phosphor Bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO:		4561-T	
				LINEAR	ANGLES									
				0.0 $\pm$ 0.25	X° REF $\pm$ 6°	APPROVED								
A0	新图面发行	2018.12.12		0.00 $\pm$ 0.15	X° $\pm$ 3°	DESIGNER								
REV.	REVISION RECORD	DATE	UNIT: MM	0.000 $\pm$ 0.08	X° X' $\pm$ 2°	DRAWN	肖丽娟	2018.12.12	TITLE: 4.50mm pitch Crimp Terminal		REV:	A0	SHEET:	1/1