

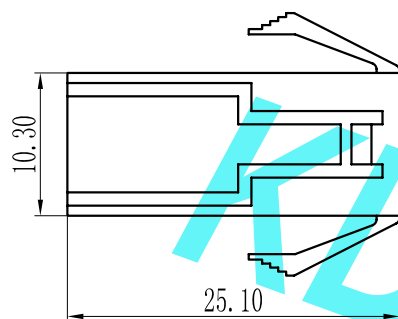




环保物料

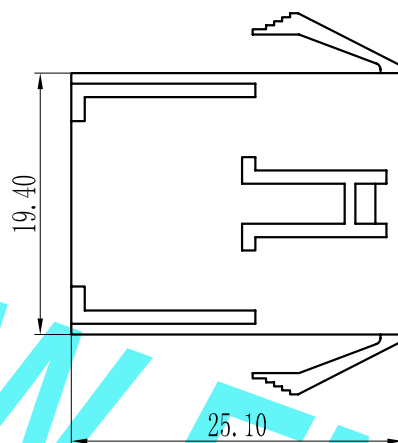


6613F-02



6613F-04

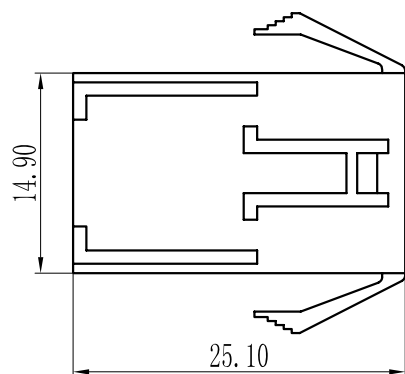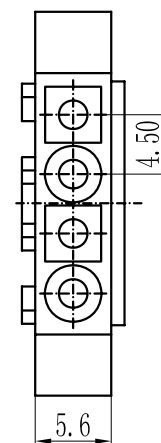

6613F-03

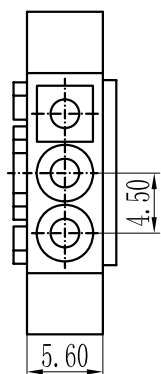

技术参数 SPECIFICATIONS

- ◆间距: 4.5 Pitch:4.5
- ◆适用线规: AWG#26-#16
Applicable Wire:AWG#26-#16
- ◆额定电压: AC,DC, 300V (有效值)
Voltage rating: AC,DC, 300V(rms)
- ◆额定电流: 6.0-10.0A, AC, DC
Current rating:6.0-10.0A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1500\text{M}\Omega$
Insulation resistance: $\geq 1500\text{M}\Omega$
- ◆接触电阻: $\leq 15\text{m}\Omega$
Contact resistance: $\leq 15\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0



GENERAL TOLERANCES

LINEAR	ANGLES
0.0 $\pm$ 0.25	X° REF $\pm$ 6°
0.00 $\pm$ 0.15	X° $\pm$ 3°
0.000 $\pm$ 0.08	X° X' $\pm$ 2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2018.12.12



东莞市康导新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgkonne.cn

公司电话: 0769-85337633

邮箱: 2850175988@qq.com

公司传真: 0769-85392827

TITLE:

4.50mm pitch Single Housing

PART. NO:

6613F-XX

DWG. NO:

REV: A0

SHEET: 1/1

A0 新图面发行

2018.12.12

UNIT: MM

REV. REVISION RECORD

DATE

SIZE: A4