

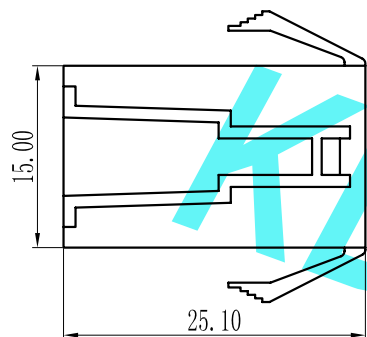



环保物料

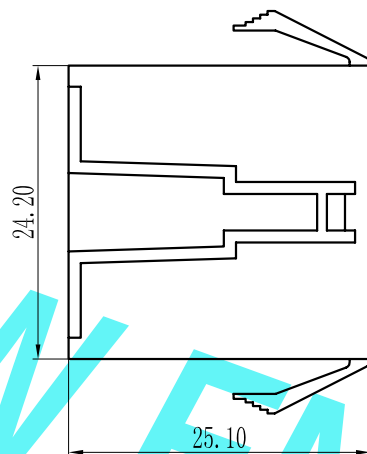


6613F-3×03



6613F-3×05

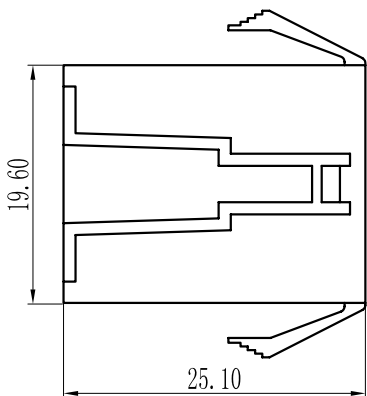

6613F-3×04

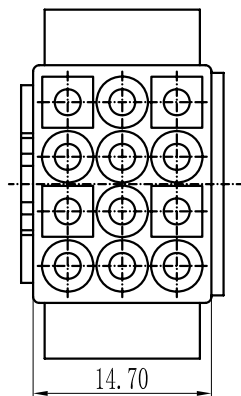

技术参数 SPECIFICATIONS

- ◆间距: 4.5 Pitch:4.5
- ◆适用线规: AWG#26-#16
Applicable Wire:AWG#26-#16
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V (rms)
- ◆额定电流: 6.0-10.0A, AC, DC
Current rating: 6.0-10.0A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp: -25℃~+85℃
- ◆绝缘电阻: $\geq 1500M\Omega$
Insulation resistance: $\geq 1500M\Omega$
- ◆接触电阻: $\leq 15m\Omega$
Contact resistance: $\leq 15m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator: Nylon66 UL94V-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 6613F-3×XX	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.12.12		UNIT: MM	0.00±0.15	X° ±3°	TITLE: 4.50mm pitch Three Housing				
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.12		REV: A0 SHEET: 1/1	