


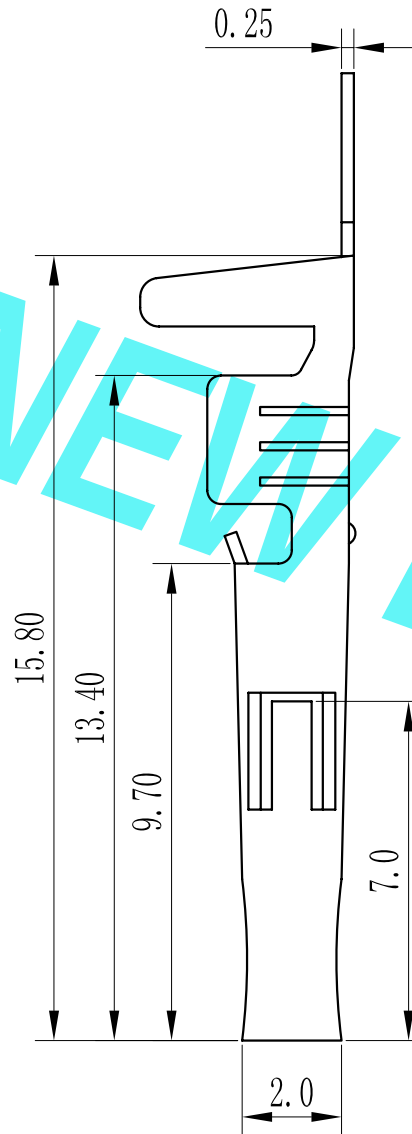


环保物料

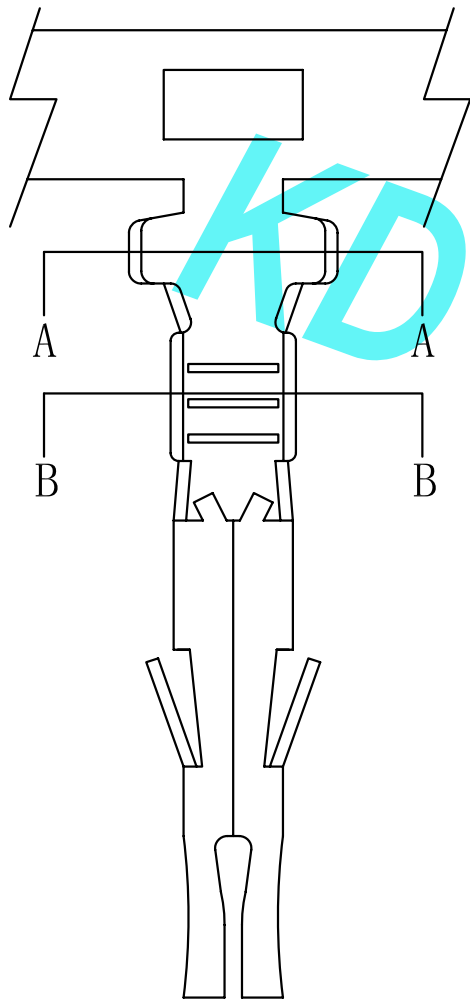

SECTION: A-A



SECTION: B-B

技术参数 SPECIFICATIONS

- ◆间距: 4.5 Pitch:4.5
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)
- ◆额定电流: 6.0-10A, AC, DC
Current rating: 6.0-10A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 15\text{m}\Omega$
Contact resistance: $\leq 15\text{m}\Omega$

材料 MATERIAL

- ◆端子: 磷青铜
Terminal: Phosphor Bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 4500M-T			
				LINEAR	ANGLES					APPROVED			DWG. NO:
				0. 0±0. 25	X° REF±6°								
A0	新图面发行	2018. 12. 12		UNIT: MM	0. 00±0. 15								
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 12	REV: A0	SHEET: 1/1			