
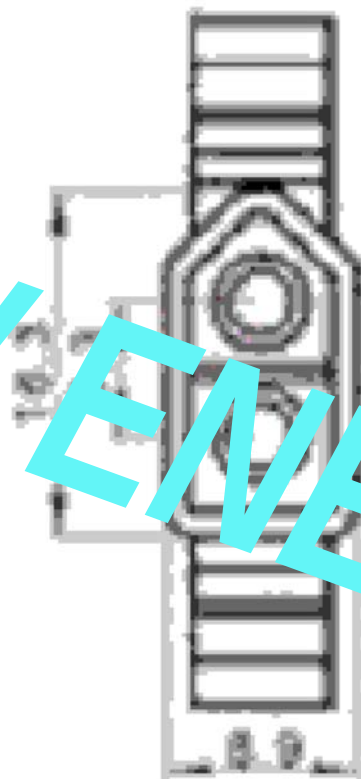


环保物料

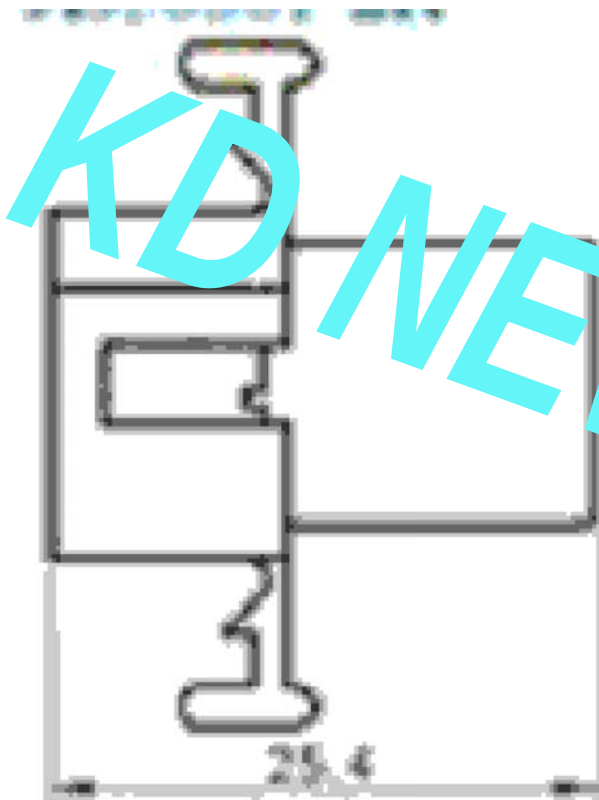

技术参数:

线数: 2、3、4、6、9、12、15

温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$

额定电压: 250V DC/AC (有效值)

额定电流: 5.0A

绝缘电阻: $\geq 1000\text{M}\Omega$

接触电阻: $\leq 0.01\text{m}\Omega$

耐压: 1000V AC(有效值)

材料:

孔座: 尼龙66 UL94V-0

插座: 尼龙66 UL94V-0

端子: 磷铜

线数 Poles	编 号 Part No	尺寸Dimensions(mm)	
		A	B
2	KD50301-2P	20.32	9.53
3	KD50301-3P	23.70	9.53
4(1x4)	KD50301-4P	28.73	9.53
4(2x2)	KD50301-4PIN	14.10	17.65
6	KD50301-6P	19.05	17.65
9	KD50301-9P	23.80	16.76
12	KD50301-12P	29.34	19.30
15	KD50301-15P	34.11	19.30

A0	新图面发行	2018.12.14	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 电子邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: KD3001-XR
				LINEAR	ANGLES					
				0.0 $\pm$ 0.25	X $^{\circ}$ REF $\pm$ 6 $^{\circ}$					
				0.00 $\pm$ 0.15	X $^{\circ}$ $\pm$ 3 $^{\circ}$					
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 $\pm$ 0.08	X $^{\circ}$ X' $\pm$ 2 $^{\circ}$	DRAWN	肖丽娟	2018.12.14	TITLE: 5.00mm pitch Single Housing	DWG. NO:
									REV:	A0
									SHEET: 1/1	