

环保物料

技术参数:

线数: 2、3、4、6、9、12、15

温度范围: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

额定电压: 250V DC/AC (有效值)

额定电流: 5.0A

绝缘电阻: $\geq 1000\text{M}\Omega$

接触电阻: $\leq 0.01\text{m}\Omega$


耐压: 1000V AC(有效值)

材料:

孔座: 尼龙66 UL94V-0

端座: 尼龙66 UL94V-0

端子: 磷铜

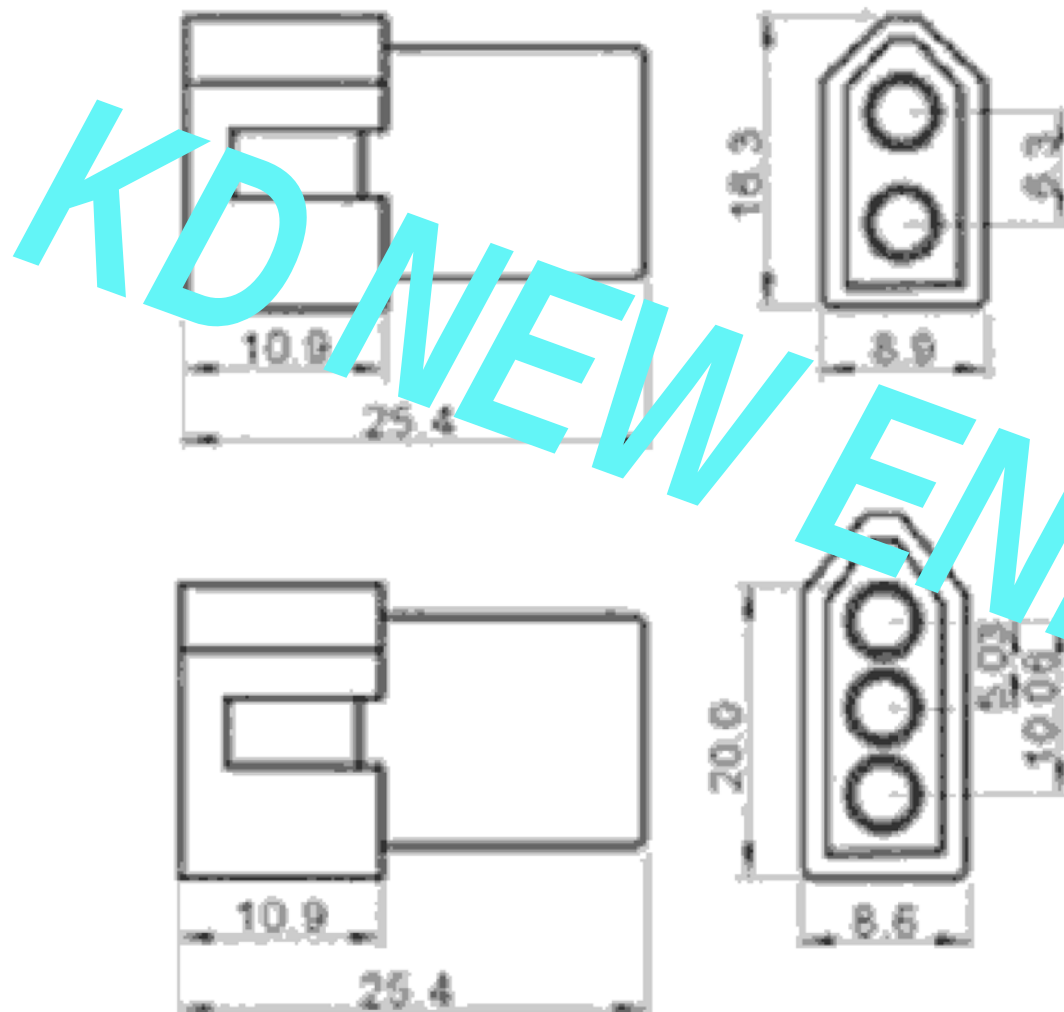

线数 Poles	编 号 Part No	尺寸Dimensions(mm)	
		A	B
2	KD50301-2P	20.32	9.53
3	KD50301-3P	23.70	9.53
4(1x4)	KD50301-4P	28.73	9.53
4(2x2)	KD50301-4PIN	14.10	17.65
6	KD50301-6P	19.05	17.65
9	KD50301-9P	23.80	16.76
12	KD50301-12P	29.34	19.30
15	KD50301-15P	34.11	19.30

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175886@qq.com 公司传真: 0769-85392827	PART. NO: KD3001-XRF		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.12.14	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.12.14		TITLE: 5.00mm pitch Single Housing	REV:	A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°						SHEET:	1/1