


环保物料

Pin数	尺寸A	尺寸B
2	5.00	10.00
3	10.00	15.00
4	15.00	20.00
5	20.00	25.00
6	25.00	30.00
7	30.00	35.00
8	35.00	40.00
9	40.00	45.00
10	45.00	50.00
11	50.00	55.00
12	55.00	60.00
13	60.00	65.00
14	66.00	70.00
15	71.00	75.00
16	76.00	80.00
17	81.00	85.00
18	86.00	90.00
19	91.00	95.00
20	96.00	100.00

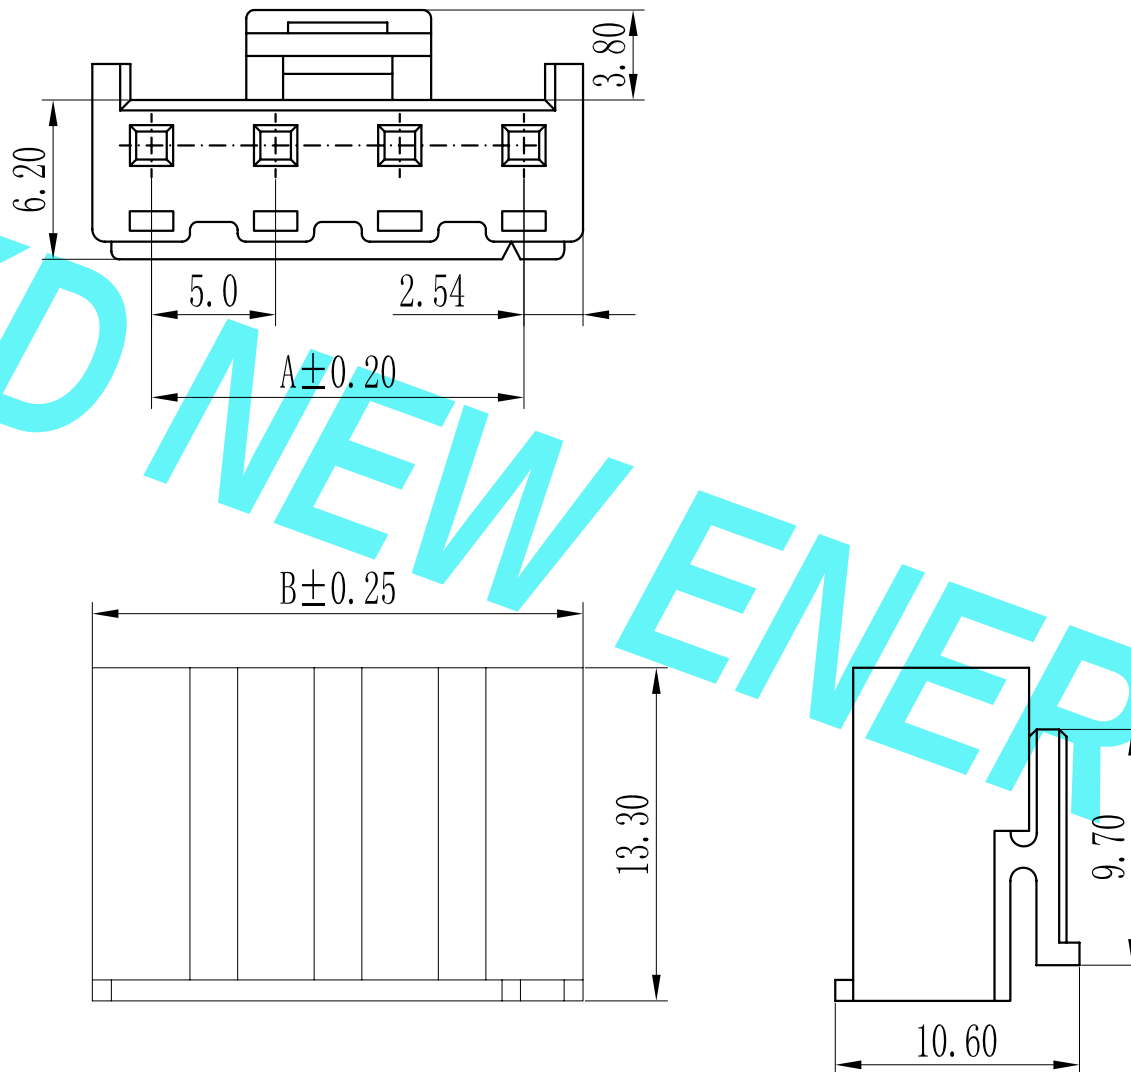

技术参数 SPECIFICATIONS

- ◆间距: 5.0 Pitch:5.0
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 7A, AC, DC (AWG#24)
Current rating:7A, AC, DC (AWG#24)
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 5011-XX	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.00±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.12.14		0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.12.14		TITLE: 5.00mm pitch Single Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°					REV: A0	SHEET: 1/1