

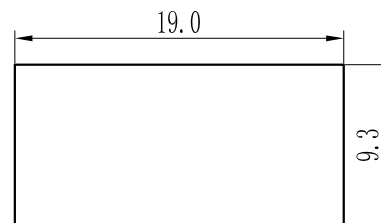
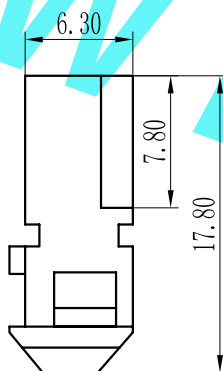
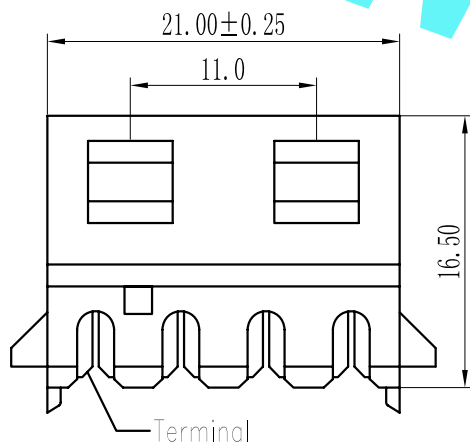


环保物料

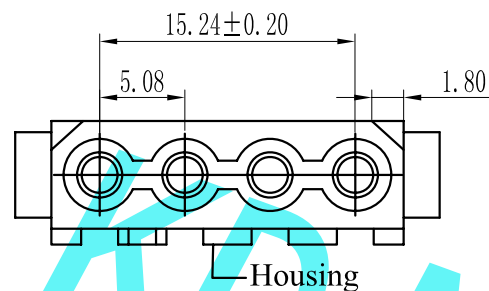

870156-4VXX

870156-4RXX

技术参数 SPECIFICATIONS

- ◆间距: 5.08 Pitch:5.08
- ◆适用线规: AWG#18-#22
Applicable Wire:AWG#18-#22
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 7A, AC, DC (AWG#24)
Current rating:7A, AC, DC (AWG#24)
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-2
Insulator:Nylon66 UL94V-2
- ◆Part No:870156-4VXX(180度)
Part No:870156-4RXX(90度)



GENERAL TOLERANCES

LINEAR ANGLES

0.0±0.25 X° REF±6°

0.00±0.15 X° ±3°

0.000±0.08 X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2018.12.15



东莞市康导新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgkonne.cn

公司电话: 0769-85337633

邮箱: 2850175988@qq.com 公司传真: 0769-85392827

TITLE:

5.08mm pitch Single Housing

PART. NO:

870156-4C

DWG. NO:

REV: A0

SHEET: 1/1

A0	新图面发行	2018.12.15	UNIT: MM
REV.	REVISION RECORD	DATE	SIZE: A4