


环保物料

Pin数	尺寸A	尺寸B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80
11	50.80	55.88
12	55.88	60.96
13	60.96	66.04
14	66.04	71.12
15	71.12	76.20
16	76.20	81.28
17	81.28	86.36
18	86.36	91.44
19	91.44	96.52
20	96.52	101.60

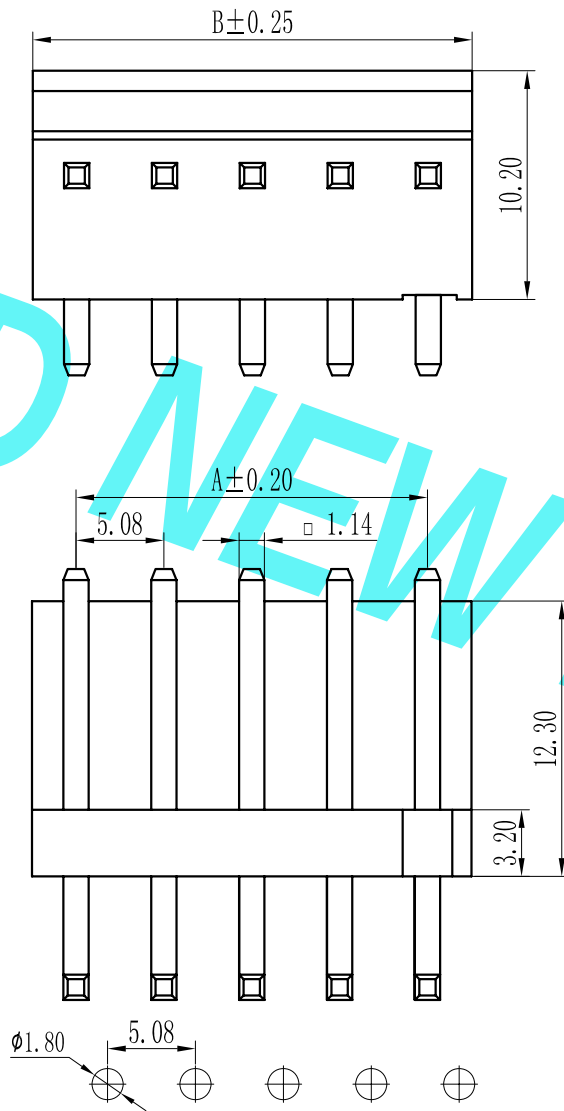

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆间距: 5.08 Pitch:5.08
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 7A, AC, DC (AWG#24)
Current rating:7A, AC, DC (AWG#24)
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-2
Insulator:Nylon66 UL94V-2
- ◆插针: 黄铜
Contact pin:Brass, Tin Plated

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 5813-XX		
				LINEAR	ANGLES	APPROVED					DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.12.15	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 5.08mm pitch Single Wafer		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.15				
											REV: A0	SHEET: 1/1