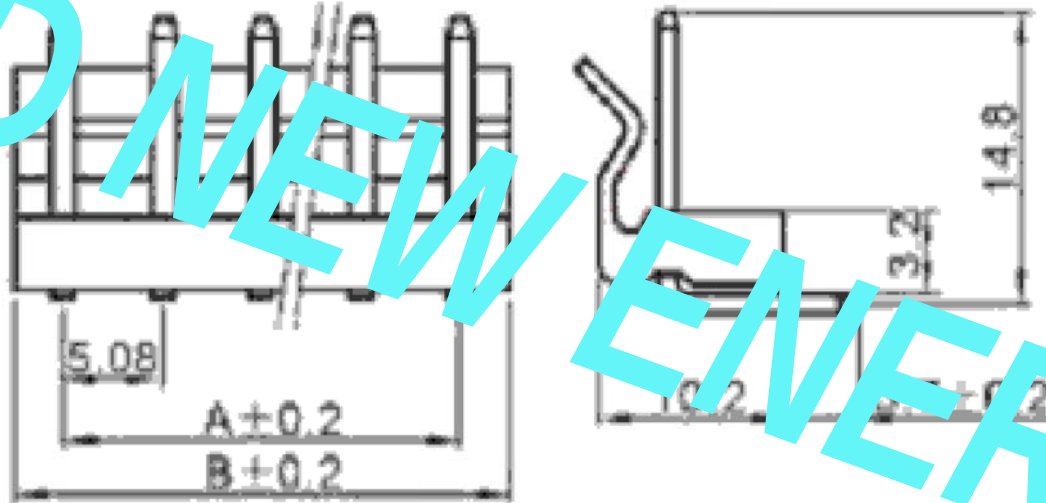


	1	2	3	4	5	6	7	8																																															
A	环保物料																																																						
B	Pin数	尺寸A	尺寸B																																																				
C	2	5.08	10.16																																																				
D	3	10.16	15.24																																																				
E	4	15.24	20.32																																																				
F	5	20.32	25.40																																																				
G	6	25.40	30.48																																																				
H	7	30.48	35.56																																																				
I	8	35.56	40.64																																																				
J	9	40.64	45.72																																																				
K	10	45.72	50.80																																																				
L	11	50.80	55.88																																																				
M	12	55.88	60.96																																																				
N	13	60.96	66.04																																																				
O	14	66.04	71.12																																																				
P	15	71.12	76.20																																																				
Q	16	76.20	81.28																																																				
R	17	81.28	86.36																																																				
S	18	86.36	91.44																																																				
T	19	91.44	96.52																																																				
U	20	96.52	101.60																																																				
V																																																							
W	技术参数 SPECIFICATIONS ◆间距：5.08 Pitch:5.08 ◆适用线规：AWG#22-#28 Applicable Wire:AWG#22-#28 ◆额定电压：AC,DC,250V（有效值） Voltage rating: AC, DC, 250V(rms) ◆额定电流：7A, AC, DC (AWG#24) Current rating:7A, AC, DC (AWG#24) ◆耐压值：1500V AC/minute Withstand voltage:1500V AC/minute ◆工作温度：-25℃~+85℃ Working Temp:-25℃~+85℃ ◆绝缘电阻：≥1000MΩ Insulation resistance:≥1000MΩ ◆接触电阻：≤20mΩ Contact resistance:≤20mΩ 材料 MATERIAL 绝缘体 Insulator:Nylon66, UL94V-2 插针 Contact pin:Brass, Tin Plated																																																						
X	<table><tr><td colspan="2"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD. 公司地址: www.dgconne.cn 公司电话: 0769-85337633 手机: 2860175668@qq.com 公司传真: 0769-85392827</td><td colspan="2">PART. NO: 5813S-XX</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td>APPROVED</td><td></td><td></td><td colspan="2">DWG. NO:</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td>DESIGNER</td><td></td><td></td><td colspan="2">REV: A0 SHEET: 1/1</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td>DRAWN</td><td>肖丽娟</td><td>2018.12.15</td><td colspan="2">TITLE: 5.08mm pitch Single Wafer</td></tr><tr><td colspan="2">REV.</td><td colspan="2">REVISION RECORD</td><td>DATE</td><td>SIZE: A4</td><td>0.000±0.08</td><td>X° X' ±2°</td><td colspan="2"></td></tr></table>										GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD. 公司地址: www.dgconne.cn 公司电话: 0769-85337633 手机: 2860175668@qq.com 公司传真: 0769-85392827	PART. NO: 5813S-XX						APPROVED			DWG. NO:						DESIGNER			REV: A0 SHEET: 1/1						DRAWN	肖丽娟	2018.12.15	TITLE: 5.08mm pitch Single Wafer		REV.		REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X' ±2°		
		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD. 公司地址: www.dgconne.cn 公司电话: 0769-85337633 手机: 2860175668@qq.com 公司传真: 0769-85392827	PART. NO: 5813S-XX																																															
				APPROVED				DWG. NO:																																															
				DESIGNER				REV: A0 SHEET: 1/1																																															
				DRAWN	肖丽娟	2018.12.15		TITLE: 5.08mm pitch Single Wafer																																															
REV.		REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X' ±2°																																																
Y	1	2	3	4	5	6	7	8																																															