



环保物料

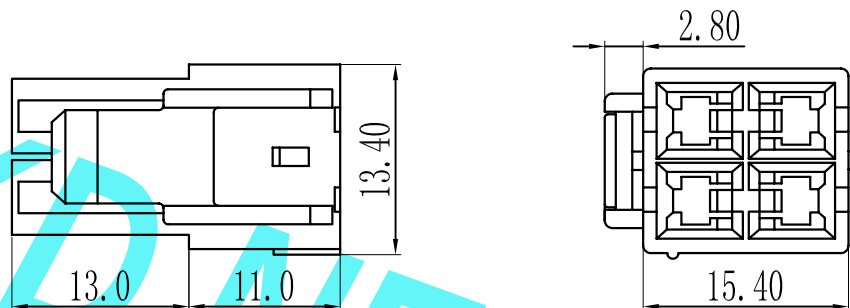

6232-2*02

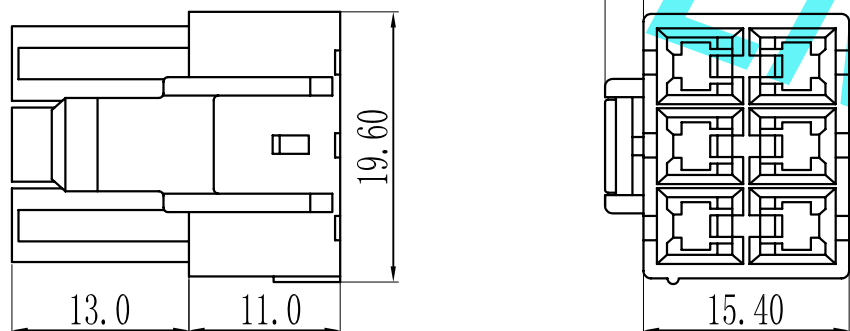

6232-2*03

技术参数 SPECIFICATIONS

- ◆间距: 6.2 Pitch:6.2
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 600V (有效值)
Voltage rating: AC, DC, 600V(rms)
- ◆额定电流: 20A, AC, DC (AWG#24)
Current rating:20A, AC, DC (AWG#24)
- ◆耐压值: 2000V AC/minute
Withstand voltage:2000V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES	APPROVED		
				0.0±0.25	X° REF±6°			
A0	新图面发行	2018.12.17		UNIT: MM	0.00±0.15	DESIGNER		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.17

 东莞市康导新能源科技有限公司
DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD
公司网址: www.dgkonne.cn 公司电话: 0769-85337533
销售热线: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:
6.20mm pitch Dual Housing

PART. NO: 6232-2×XX

DWG. NO:

REV: A0 SHEET: 1/1