


环保物料

Pin数	尺寸A	尺寸B
4	19.05	26.80
5	25.40	33.15
6	31.75	39.50
7	44.45	52.20
8	50.80	58.55
9	57.15	64.90
10	63.50	71.25
11	69.85	77.60
12	76.20	83.95
13	82.55	90.30
14	88.90	96.65
15	95.25	103.00
16	101.60	109.35
17	107.95	115.70
18	114.30	122.05
19	120.65	128.40
20	127.00	134.75

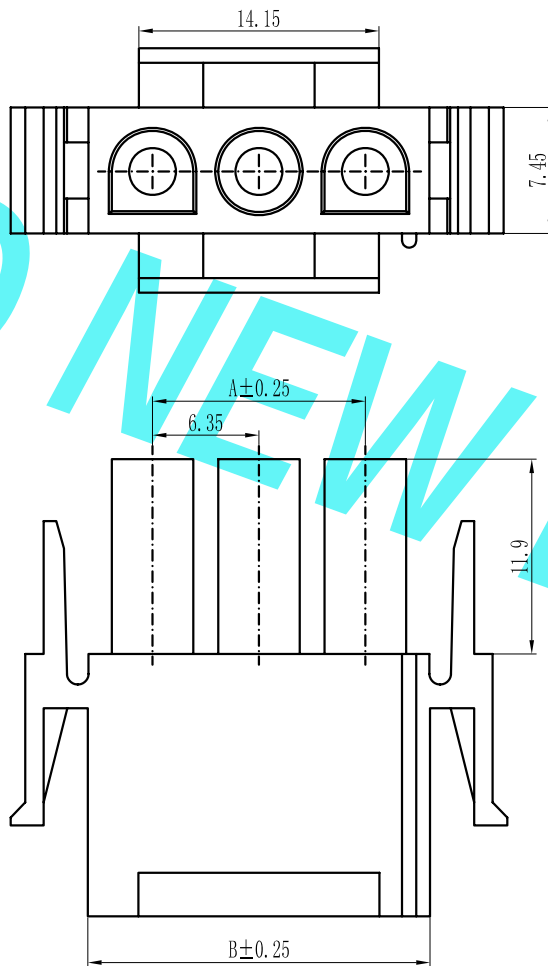

技术参数 SPECIFICATIONS

- ◆间距: 6.35 Pitch:6.35
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 100V (有效值)
Voltage rating: AC, DC, 100V(rms)
- ◆额定电流: 1A, AC, DC (AWG#24)
Current rating:1A, AC, DC (AWG#24)
- ◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 9635F-1×XX	
				LINEAR	ANGLES	APPROVED					DWG. NO:
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.12.18	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 6.35mm pitch Single Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18			