


环保物料

Pin数	尺寸A	尺寸B
4	19.05	27.05
5	25.40	33.40
6	31.75	39.75
7	44.45	52.45
8	50.80	58.80
9	57.15	65.15
10	63.50	71.50
11	69.85	77.85
12	76.20	84.20
13	82.55	90.55
14	88.90	96.90
15	95.25	103.25
16	101.60	109.60
17	107.95	115.95
18	114.30	122.30
19	120.65	128.65
20	127.00	135.00

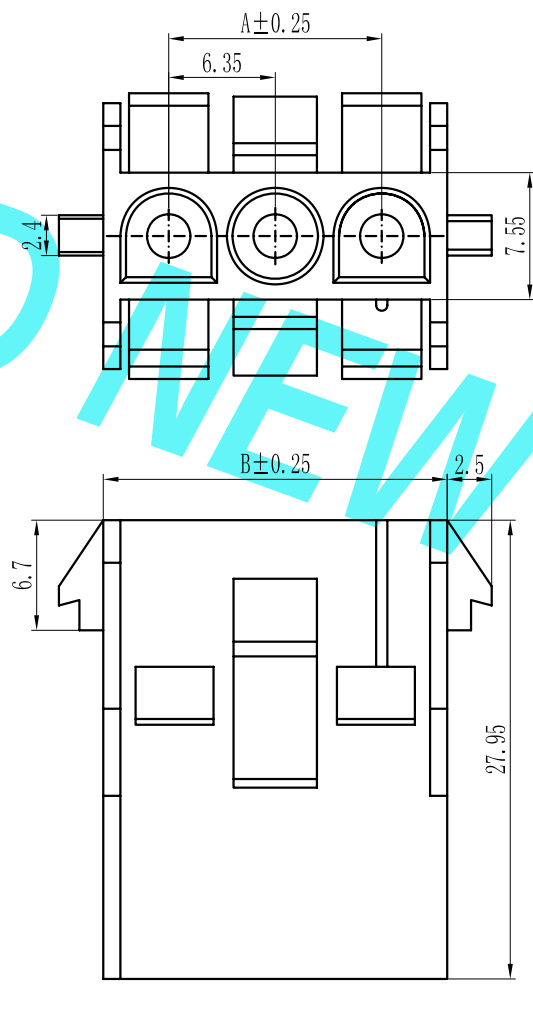

技术参数 SPECIFICATIONS

- ◆间距: 6.35 Pitch: 6.35
- ◆适用线规: AWG#22-#28
Applicable Wire: AWG#22-#28
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V (rms)
- ◆额定电流: 12A, AC, DC (AWG#24)
Current rating: 12A, AC, DC (AWG#24)
- ◆耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆工作温度: -25℃ ~ +85℃
Working Temp: -25℃ ~ +85℃
- ◆绝缘电阻: ≥ 500MΩ
Insulation resistance: ≥ 500MΩ
- ◆接触电阻: ≤ 20mΩ
Contact resistance: ≤ 20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator: Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 9635M-1×XX
				LINEAR	ANGLES	APPROVED				DWG. NO:
A0	新图面发行	2018. 12. 18	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 18		SHEET: 1/1

TITLE: 6.35mm pitch Single Housing