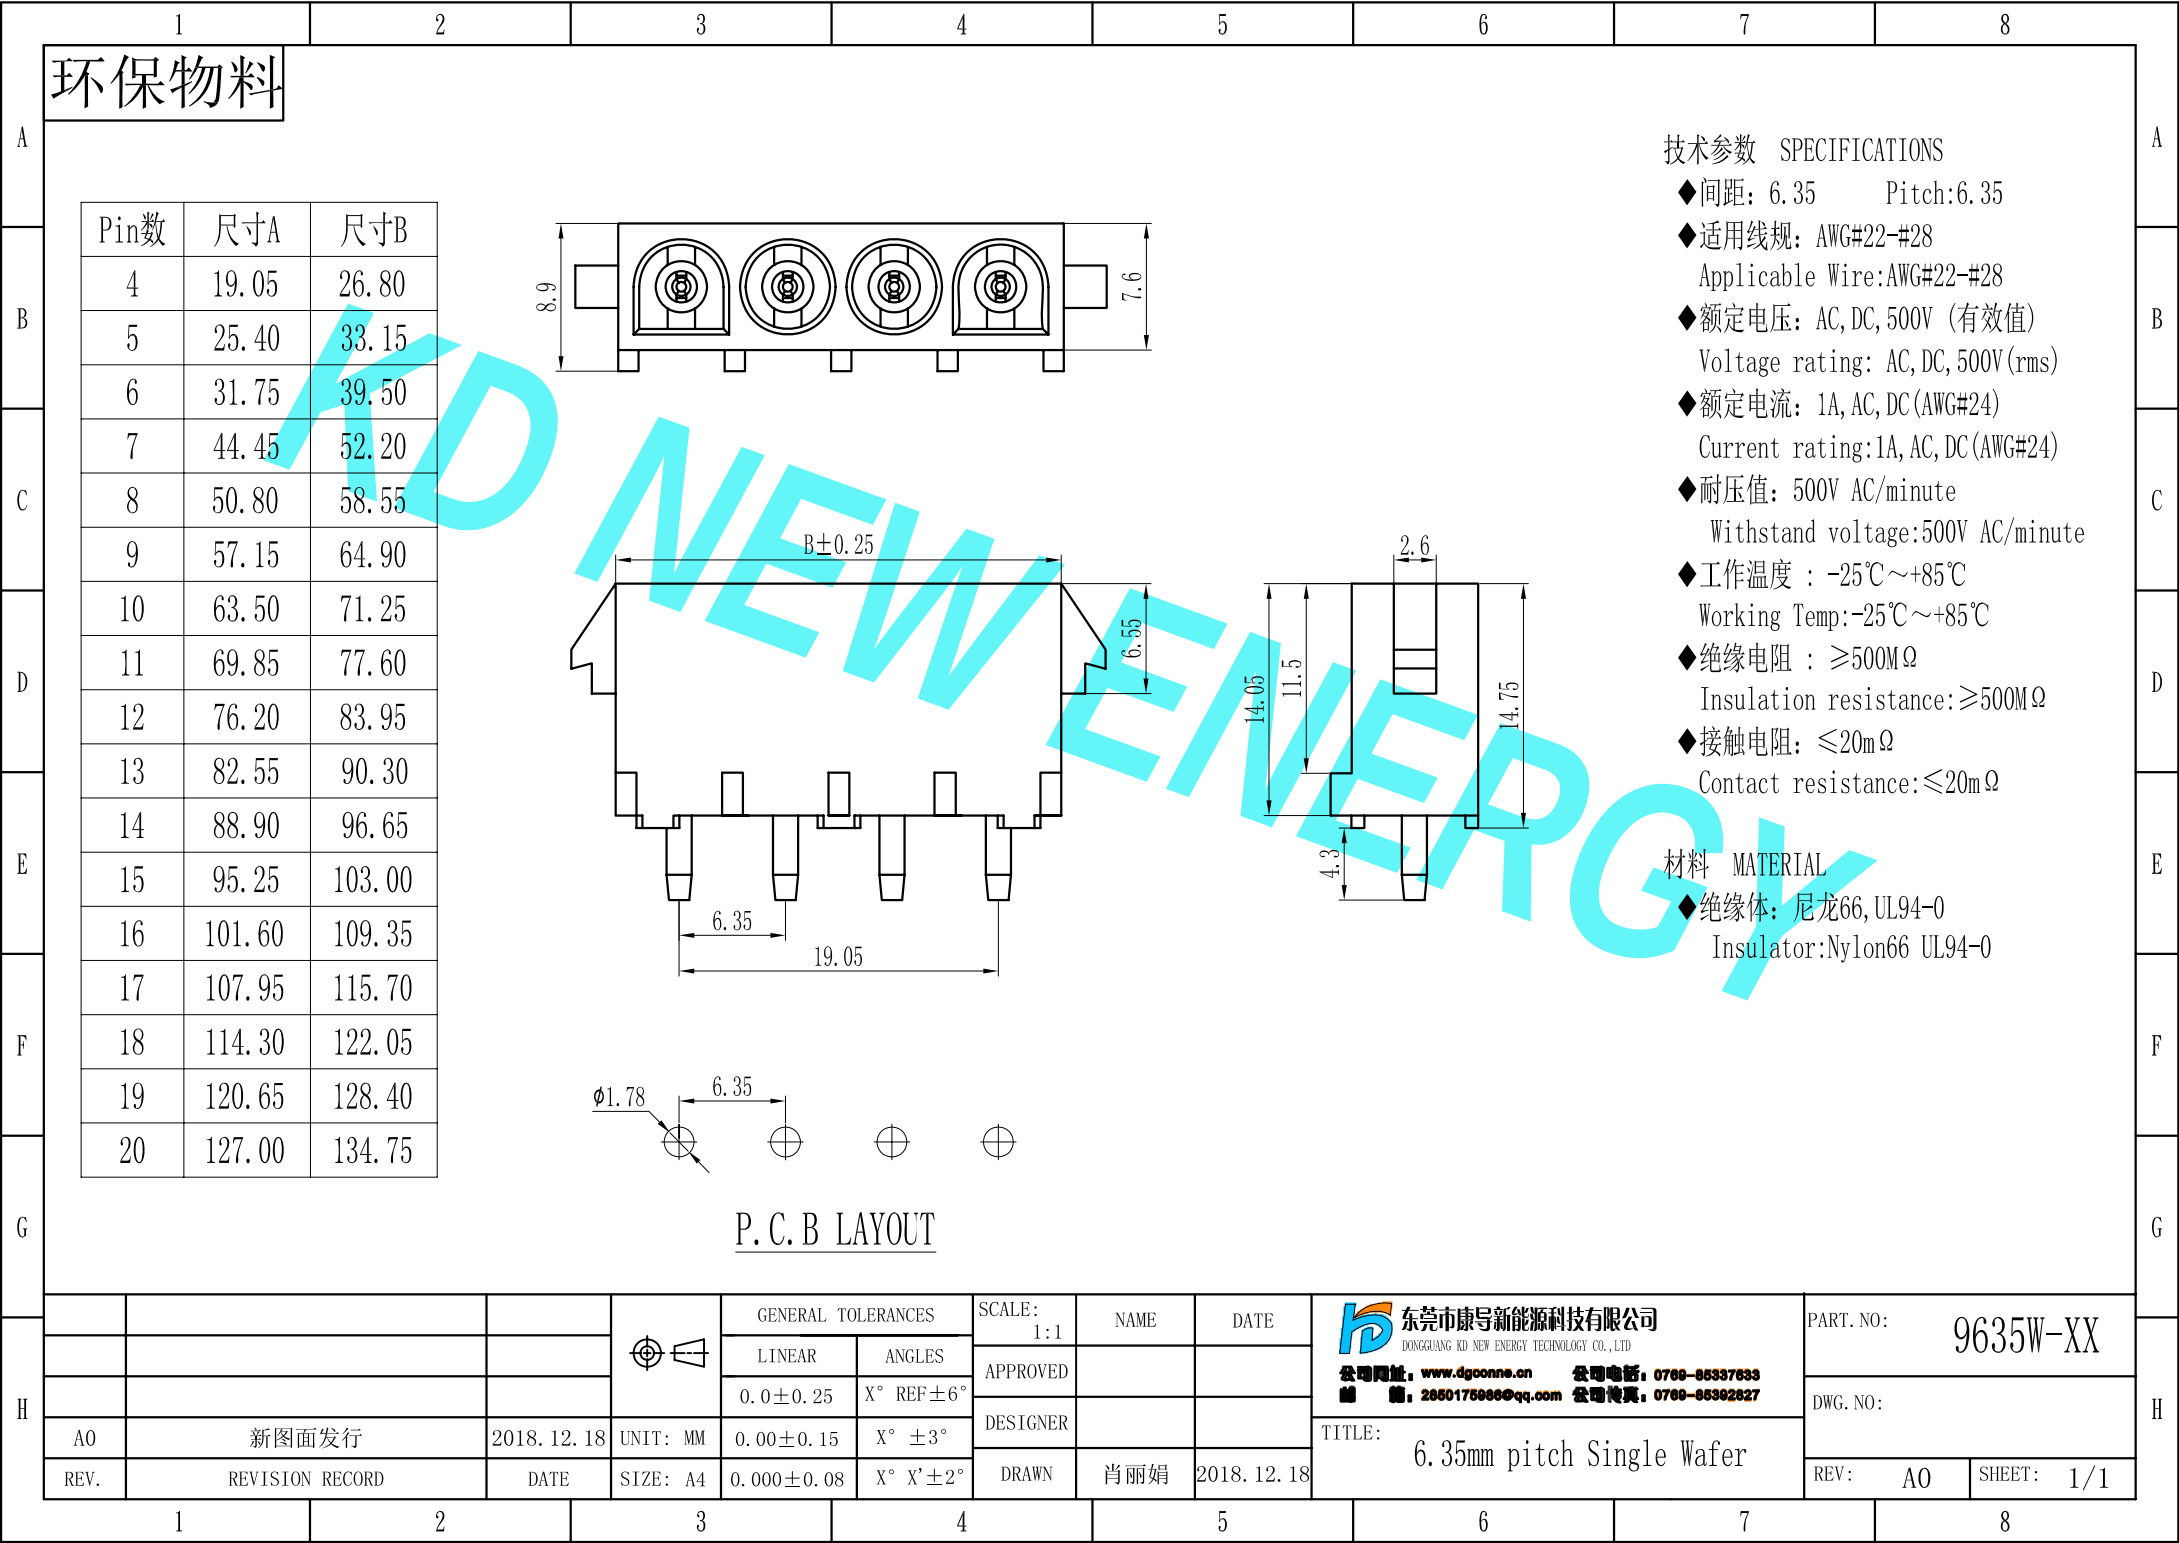
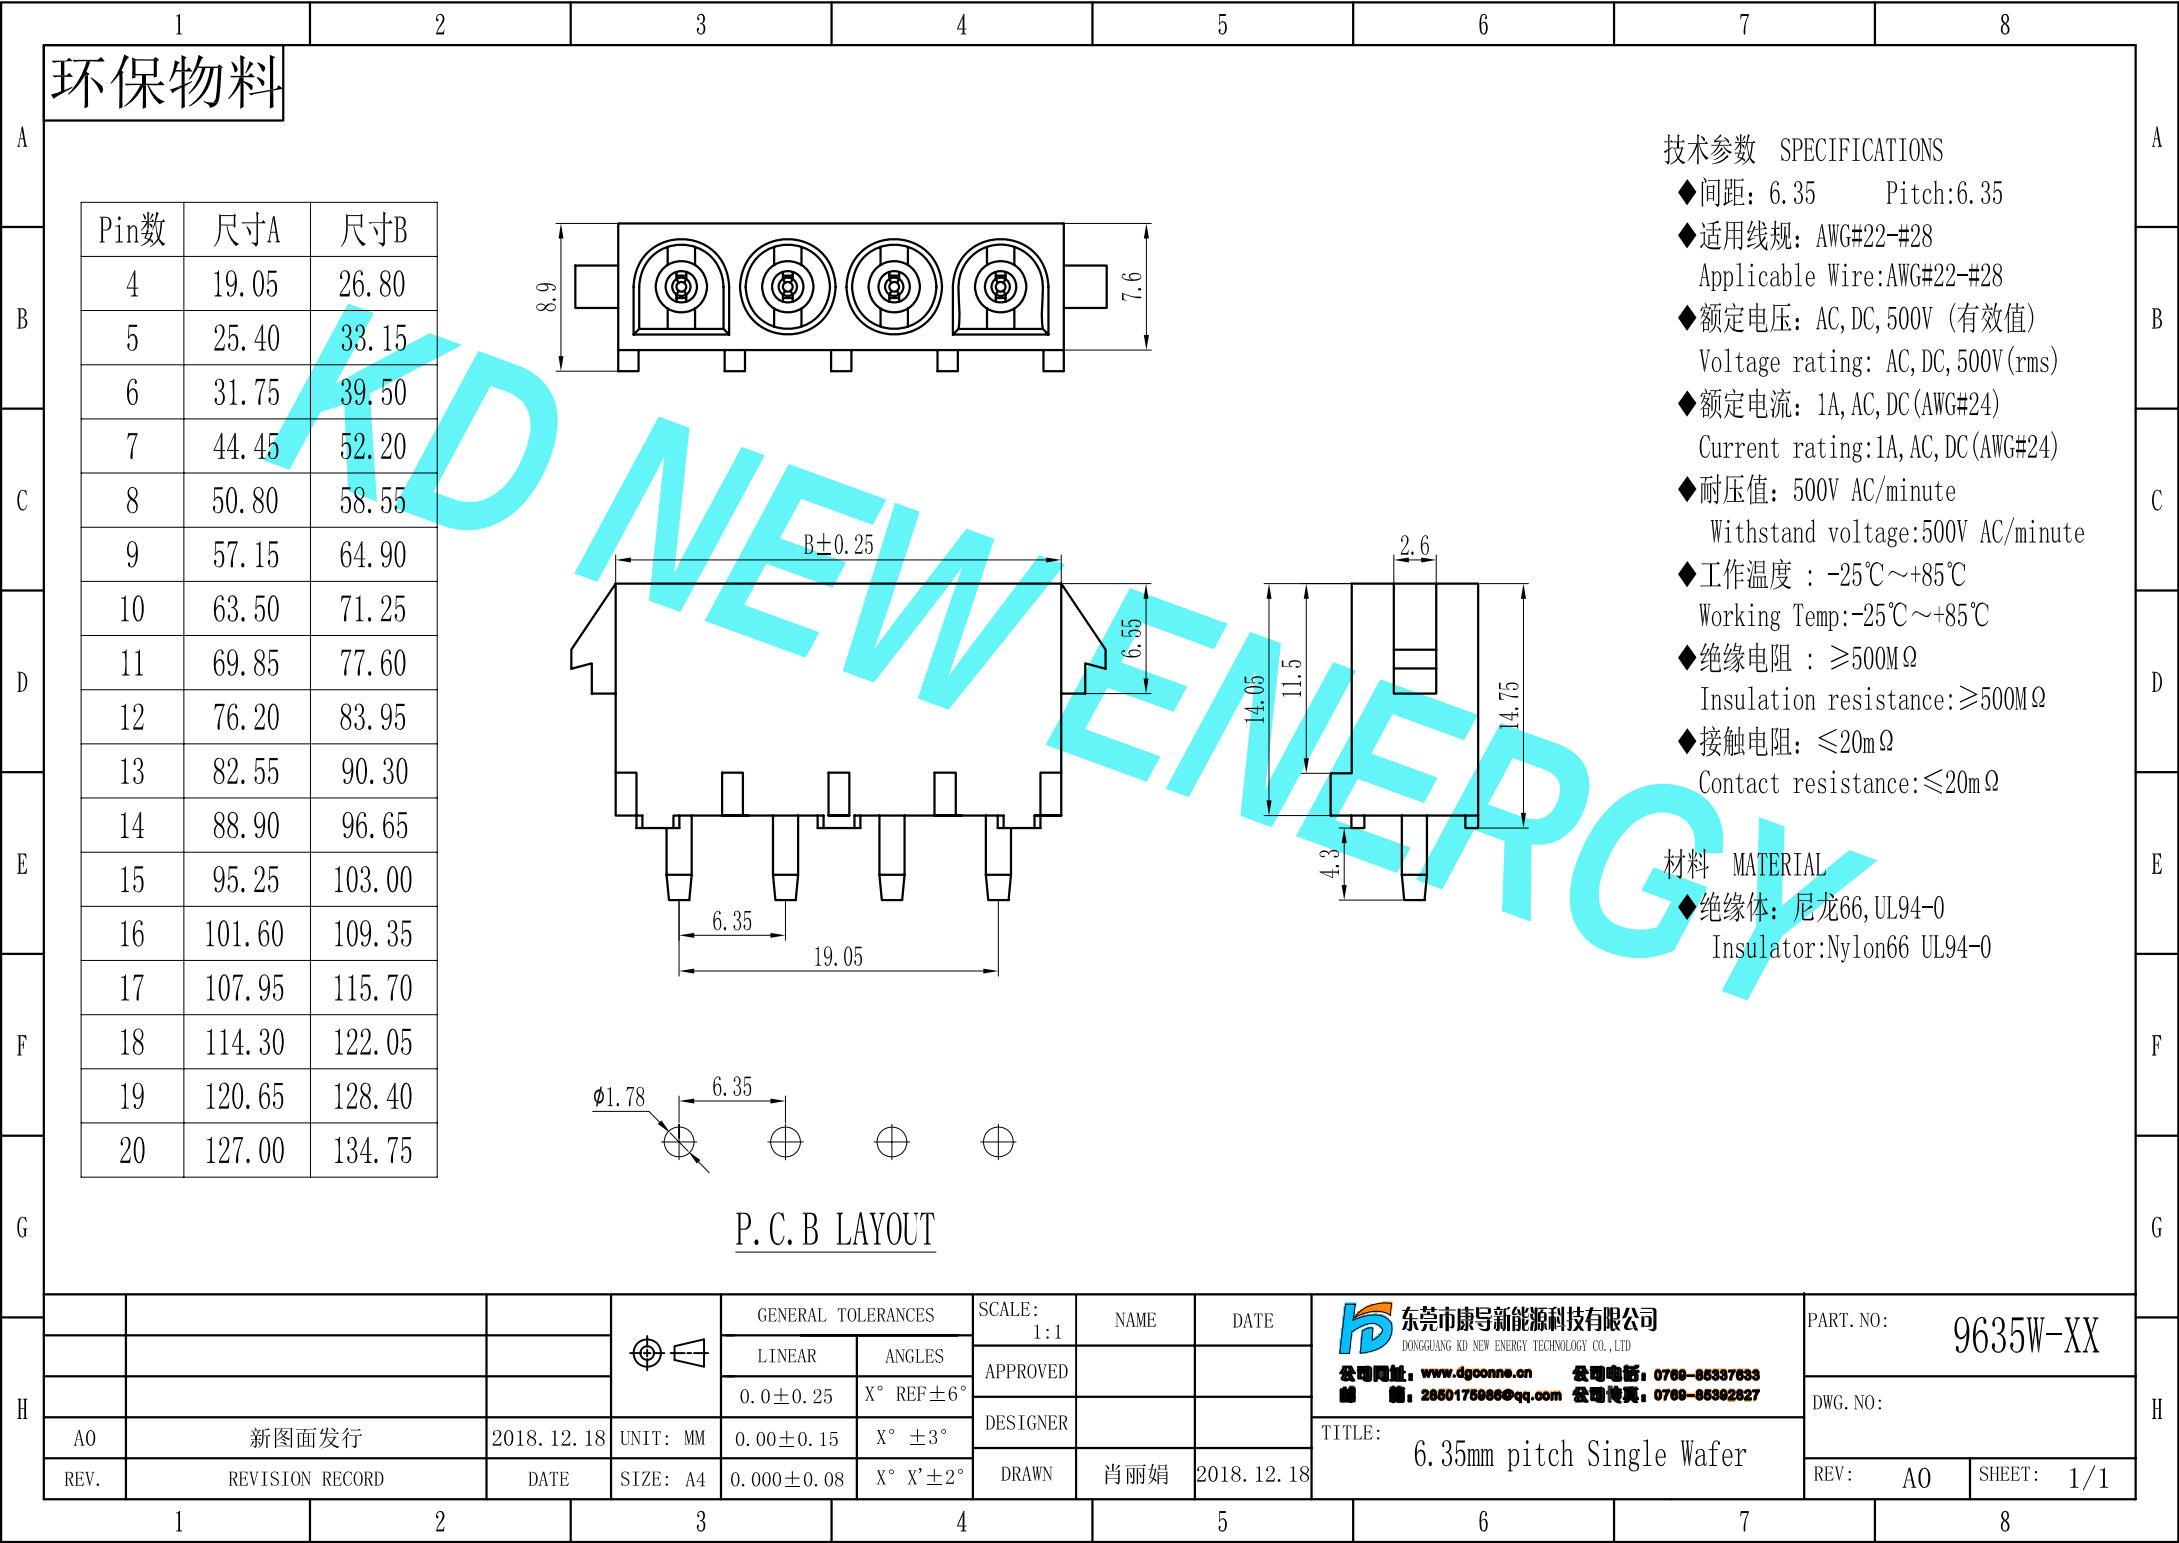
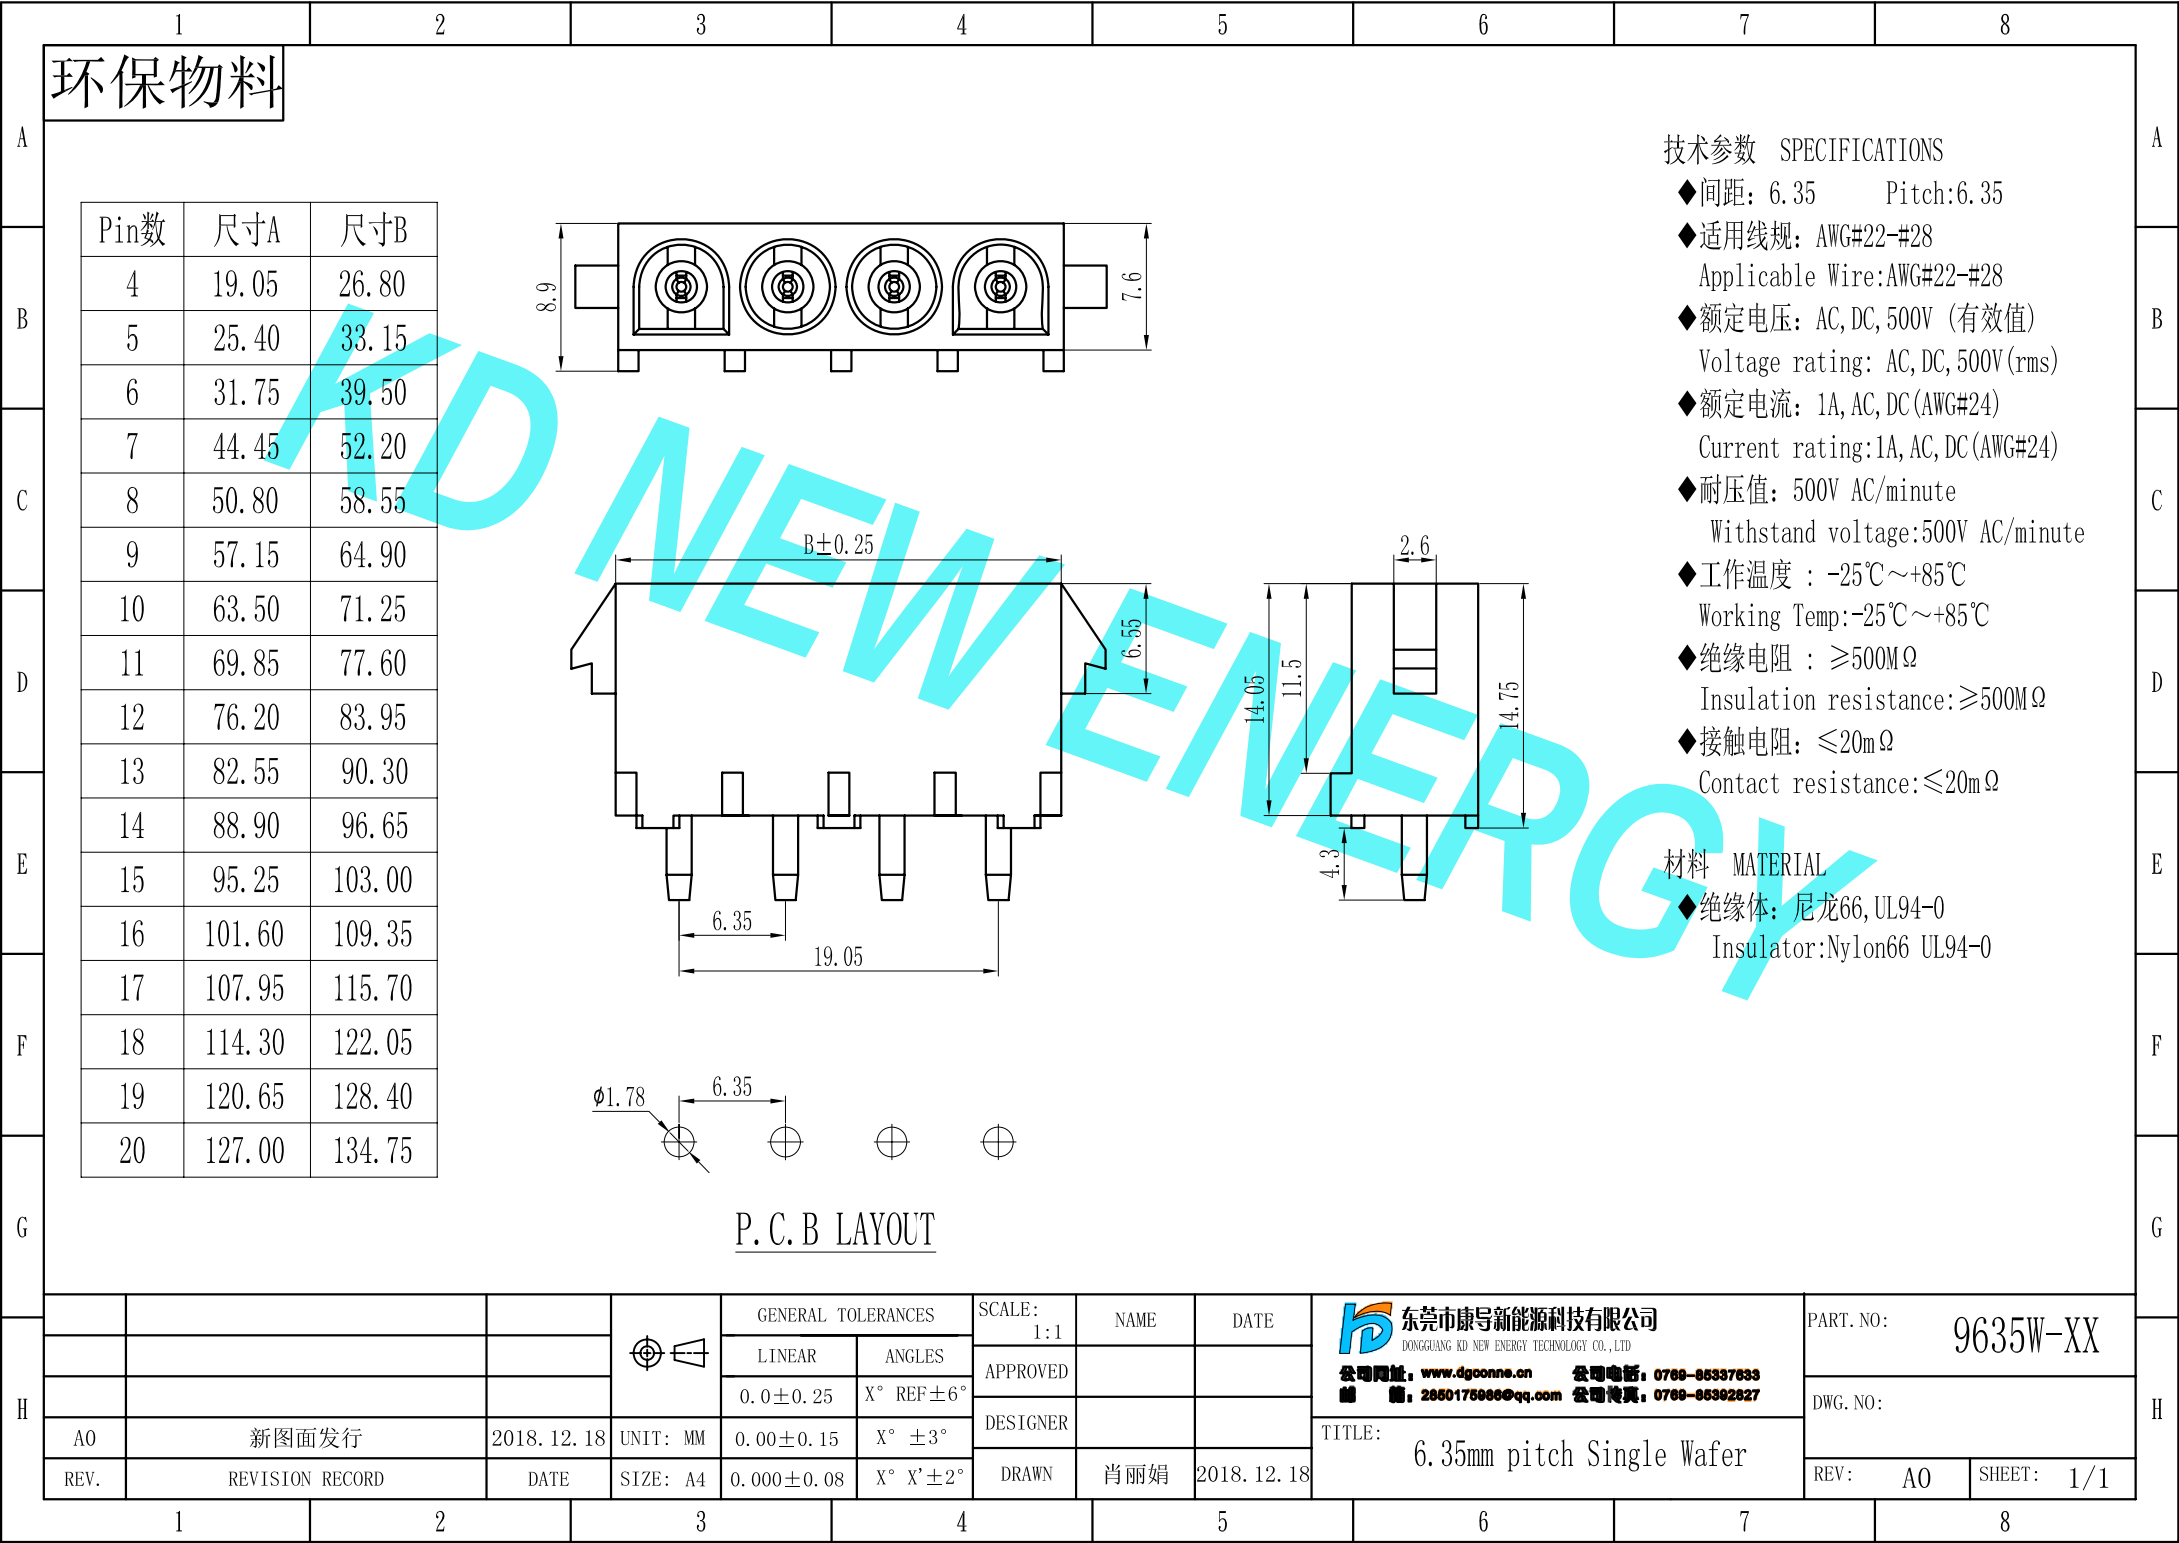


	1	2	3	4	5	6	7	8	
A	环保物料								
B	Pin数 尺寸A 尺寸B		The technical drawing includes a top view of the wafer showing four circular contact pads with dimensions 8.9 and 7.6. Below it is a side view showing the profile of the wafer with various dimensions: B±0.25, 6.55, 14.05, 11.5, 2.6, 14.75, 4.3, 6.35, and 19.05. A detail view shows a hole with diameter φ1.78 and a distance of 6.35 from the edge.						
C	4	19.05	26.80						
D	5	25.40	33.15						
E	6	31.75	39.50						
F	7	44.45	52.20						
G	8	50.80	58.55						
H	9	57.15	64.90						
	10	63.50	71.25						
	11	69.85	77.60						
	12	76.20	83.95						
	13	82.55	90.30						
	14	88.90	96.65						
	15	95.25	103.00						
	16	101.60	109.35						
	17	107.95	115.70						
	18	114.30	122.05						
	19	120.65	128.40						
	20	127.00	134.75						
	P.C.B LAYOUT								
			GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-65337633 邮 箱: 2850175966@qq.com 公司传真: 0769-65362627	
			LINER	ANGLES	1:1				
			0.0±0.25	X° REF±6°	APPROVED				
			0.00±0.15	X° ±3°	DESIGNER				
	AO	新图面发行	2018.12.18	UNIT: MM	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18
	REV.	REVISION RECORD	DATE	SIZE: A4					
	1	2	3	4	5	6	7	8	
	技术参数 SPECIFICATIONS		◆间距: 6.35 Pitch:6.35 ◆适用线规: AWG#22-#28 Applicable Wire:AWG#22-#28 ◆额定电压: AC,DC,500V (有效值) Voltage rating: AC, DC, 500V(rms) ◆额定电流: 1A, AC, DC (AWG#24) Current rating:1A, AC, DC (AWG#24) ◆耐压值: 500V AC/minute Withstand voltage:500V AC/minute ◆工作温度 : -25℃~+85℃ Working Temp:-25℃~+85℃ ◆绝缘电阻 : ≥500MΩ Insulation resistance:≥500MΩ ◆接触电阻: ≤20mΩ Contact resistance:≤20mΩ						
	材料 MATERIAL		◆绝缘体: 尼龙66, UL94-0 Insulator:Nylon66 UL94-0						
	TITLE:		6.35mm pitch Single Wafer						
	PART. NO:		9635W-XX						
	DWG. NO:								
	REV:		AO	SHEET:		1/1			

[illegible][illegible]

	1	2	3	4	5	6	7	8				
A	环保物料											
B	Pin数 尺寸A 尺寸B		P.C.B LAYOUT									
	4	19.05	26.80									
	5	25.40	33.15									
	6	31.75	39.50									
	7	44.45	52.20									
	8	50.80	58.55									
	9	57.15	64.90									
	10	63.50	71.25									
	11	69.85	77.60									
	12	76.20	83.95									
C	13	82.55	90.30									
D	14	88.90	96.65									
E	15	95.25	103.00									
F	16	101.60	109.35									
G	17	107.95	115.70									
H	18	114.30	122.05									
	19	120.65	128.40									
	20	127.00	134.75									
	新图面发行		2018.12.18	UNIT: MM	0.00±0.15	X° ±3°	东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO:	9635W-XX			
	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°		DWG. NO:				
	REV.						TITLE:	6.35mm pitch Single Wafer	REV:	AO	SHEET:	1/1
	1	2	3	4	5	6	7	8				

- [illegible]

	1	2	3	4	5	6	7	8
A	环保物料							
B	Pin数 尺寸A 尺寸B		P.C.B LAYOUT					
	4	19.05	26.80					
	5	25.40	33.15					
	6	31.75	39.50					
	7	44.45	52.20					
	8	50.80	58.55					
	9	57.15	64.90					
	10	63.50	71.25					
	11	69.85	77.60					
	12	76.20	83.95					
C	13	82.55	90.30					
D	14	88.90	96.65					
E	15	95.25	103.00					
F	16	101.60	109.35					
G	17	107.95	115.70					
H	18	114.30	122.05					
	19	120.65	128.40					
	20	127.00	134.75					
	新图面发行		2018.12.18	UNIT: MM	0.00±0.15	X° ±3°	东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-65337633 邮 箱: 2850175966@qq.com 公司传真: 0769-65362627	
	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°		
	1	2	3	4	5	6	7	8
	技术参数 SPECIFICATIONS		◆间距: 6.35 Pitch:6.35 ◆适用线规: AWG#22-#28 Applicable Wire:AWG#22-#28 ◆额定电压: AC,DC,500V (有效值) Voltage rating: AC, DC, 500V(rms) ◆额定电流: 1A, AC, DC (AWG#24) Current rating:1A, AC, DC (AWG#24) ◆耐压值: 500V AC/minute Withstand voltage:500V AC/minute ◆工作温度 : -25℃~+85℃ Working Temp:-25℃~+85℃ ◆绝缘电阻 : ≥500MΩ Insulation resistance:≥500MΩ ◆接触电阻: ≤20mΩ Contact resistance:≤20mΩ					
	材料 MATERIAL		◆绝缘体: 尼龙66, UL94-0 Insulator:Nylon66 UL94-0					
	PART. NO:		9635W-XX					
	DWG. NO:							
	REV:		A0	SHEET: 1/1				
	TITLE:		6.35mm pitch Single Wafer					
	DRAWN		肖丽娟	2018.12.18				

- [illegible]

[illegible]