

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

环保物料

Pin数	尺寸A	尺寸B
4	19.05	26.80
5	25.40	33.15
6	31.75	39.50
7	44.45	52.20
8	50.80	58.55
9	57.15	64.90
10	63.50	71.25
11	69.85	77.60
12	76.20	83.95
13	82.55	90.30
14	88.90	96.65
15	95.25	103.00
16	101.60	109.35
17	107.95	115.70
18	114.30	122.05
19	120.65	128.40
20	127.00	134.75

20.50

6.35

A±0.20

24.15

2.4

11.0

20.22

B±0.25

2.45

6.65

27.5

技术参数 SPECIFICATIONS

◆间距: 6.35 Pitch:6.35

◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28

◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)

◆额定电流: 12A, AC, DC (AWG#24)
Current rating:12A, AC, DC (AWG#24)

◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute

◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃

◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ

◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-65337633 邮箱: 2850175966@qq.com 公司传真: 0769-65362627 PART. NO: 9635M-2×XX				
				LINEAR	ANGLES					APPROVED			DWG. NO:
				0.0±0.25	X° REF±6°					DESIGNER			
A0	新图面发行	2018.12.18	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 6.35mm pitch Dual Housing	REV: A0	SHEET: 1/1	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18					

1

2

3

4

5

6

7

8

环保物料

Pin数	尺寸A	尺寸B
4	19.05	26.80
5	25.40	33.15
6	31.75	39.50
7	44.45	52.20
8	50.80	58.55
9	57.15	64.90
10	63.50	71.25
11	69.85	77.60
12	76.20	83.95
13	82.55	90.30
14	88.90	96.65
15	95.25	103.00
16	101.60	109.35
17	107.95	115.70
18	114.30	122.05
19	120.65	128.40
20	127.00	134.75

Technical drawing of a dual housing component. The top view shows a rectangular component with a central slot and two side slots. Dimensions include a total width of 20.50, a central slot width of 6.35, and a side slot width of 2.4. The side view shows a height of 11.0 and a total width of 20.22. A dimension of 24.15 is shown for the main body width, and 2.45 is shown for the side slot width. A tolerance of $A \pm 0.20$ is indicated for the central slot width.



技术参数 SPECIFICATIONS

- ◆间距: 6.35 Pitch:6.35
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)
- ◆额定电流: 12A, AC, DC (AWG#24)
Current rating:12A, AC, DC (AWG#24)
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgkoonne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85392827 TITLE: 6.35mm pitch Dual Housing	PART. NO: 9635M-2×XX				
				LINEAR	ANGLES					APPROVED			DWG. NO:	
				0.0±0.25	X° REF±6°					DESIGNER				
A0	新图面发行	2018.12.18	UNIT: MM	0.00±0.15	X° ±3°					REV: A0				
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18		SHEET: 1/1				

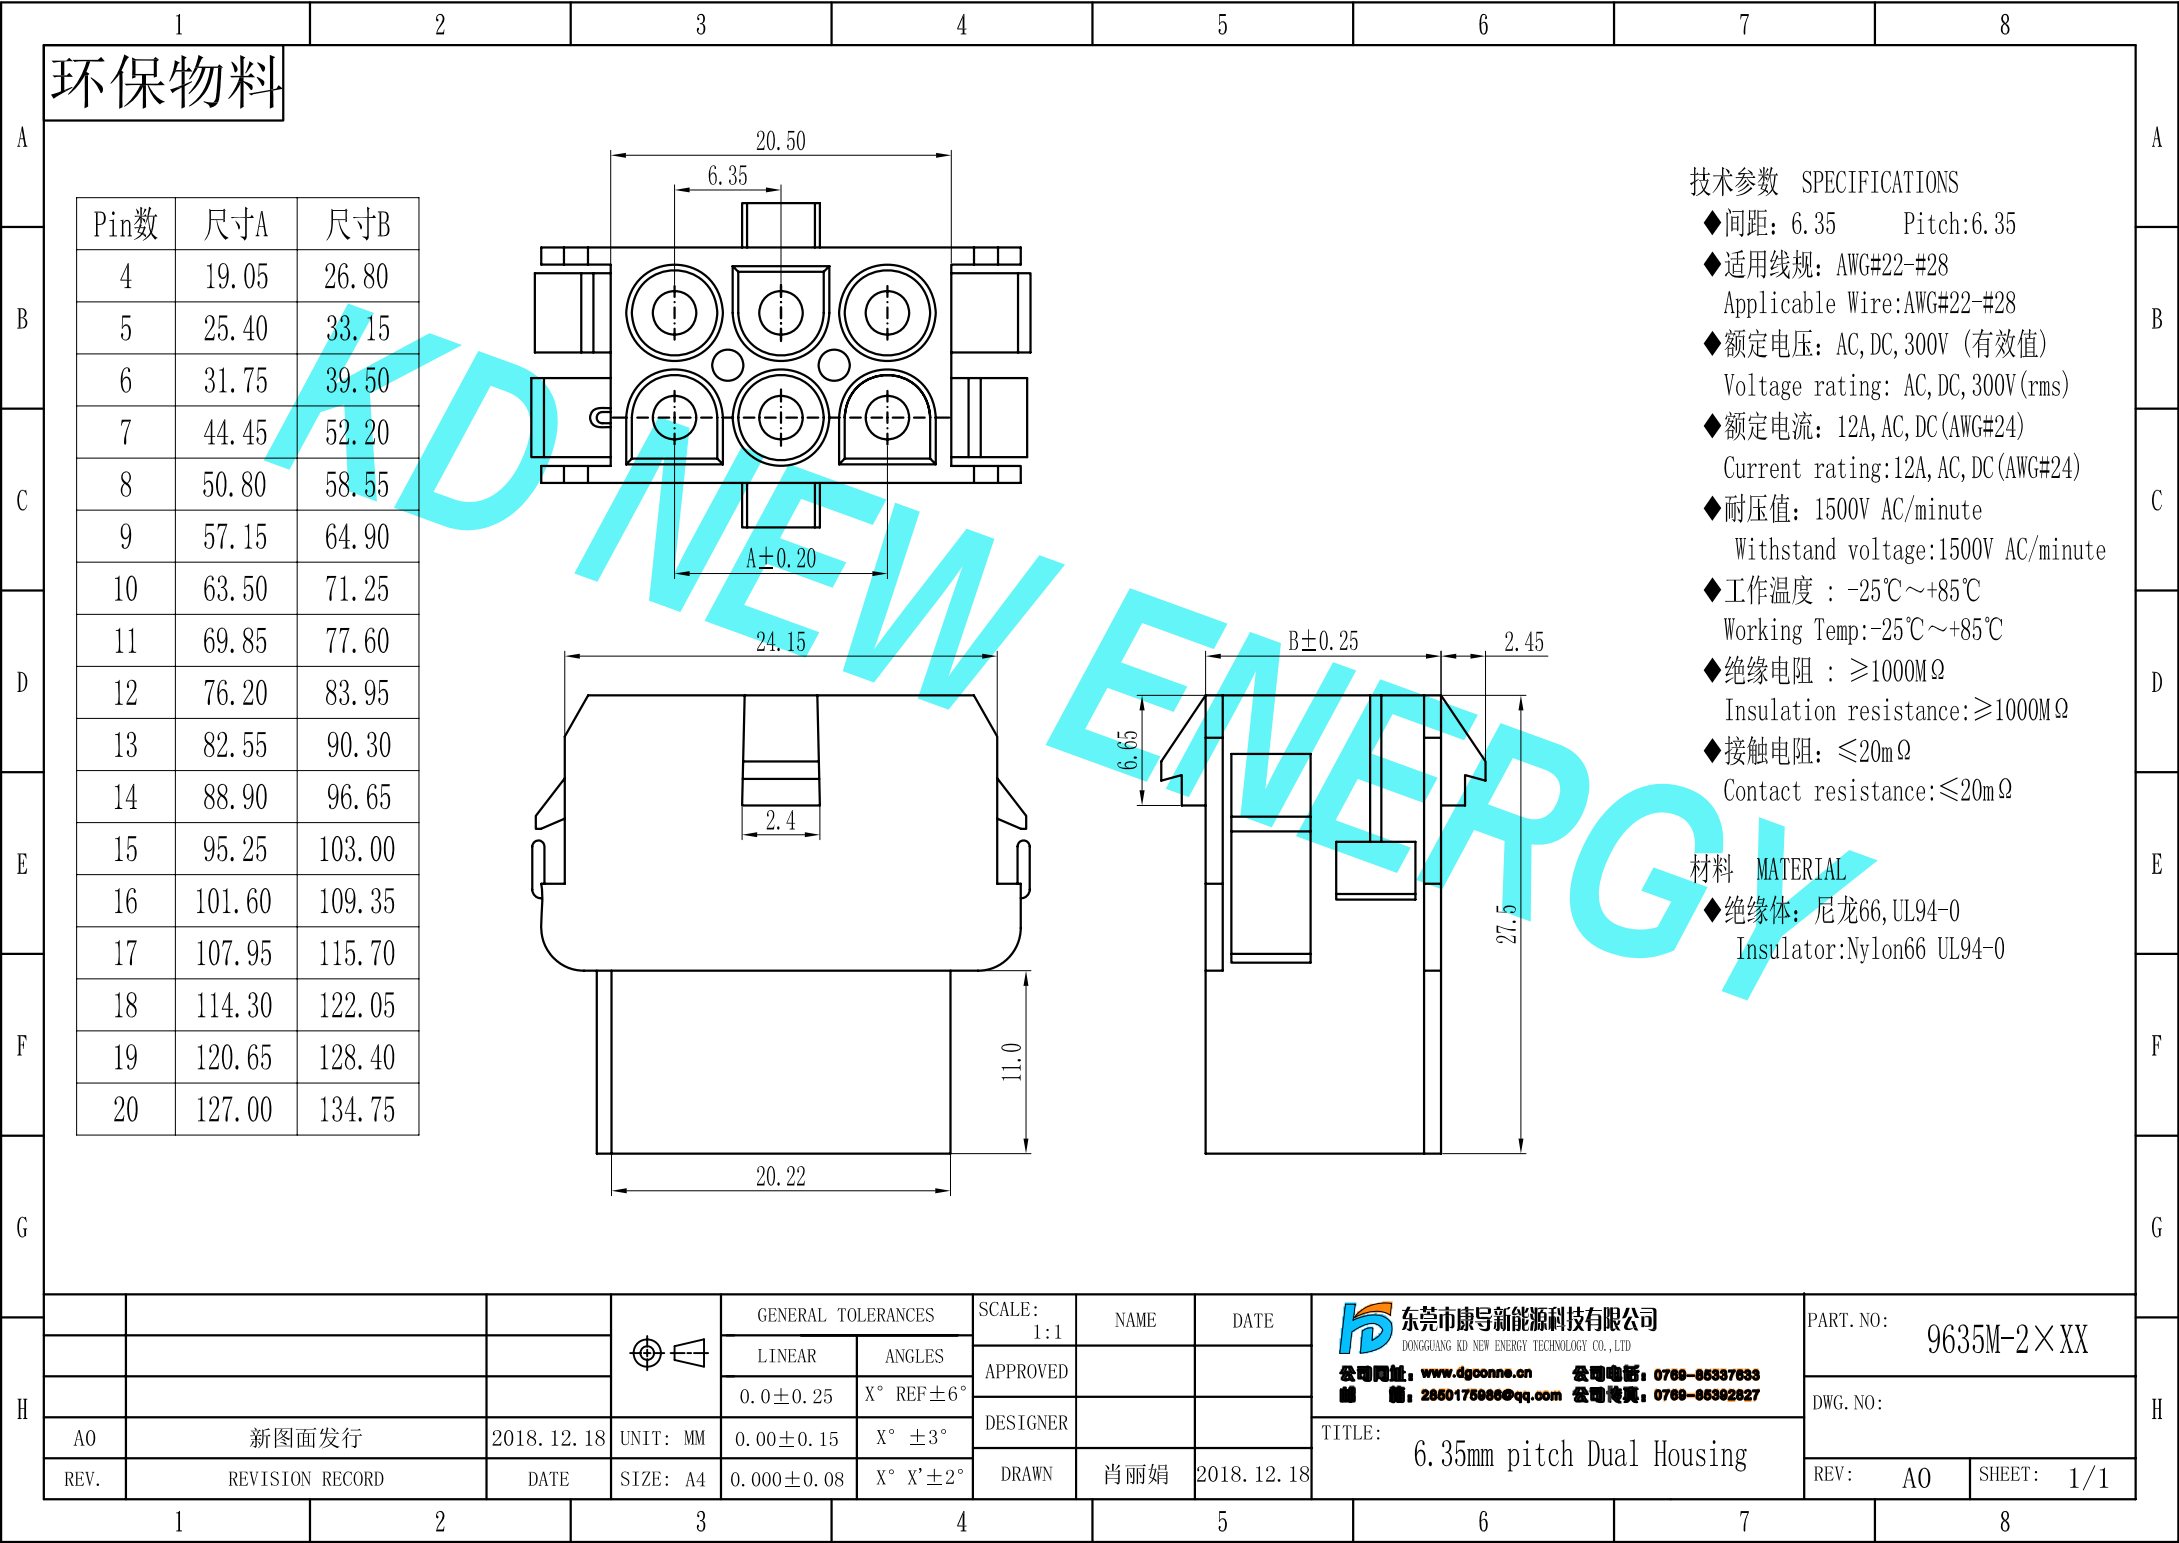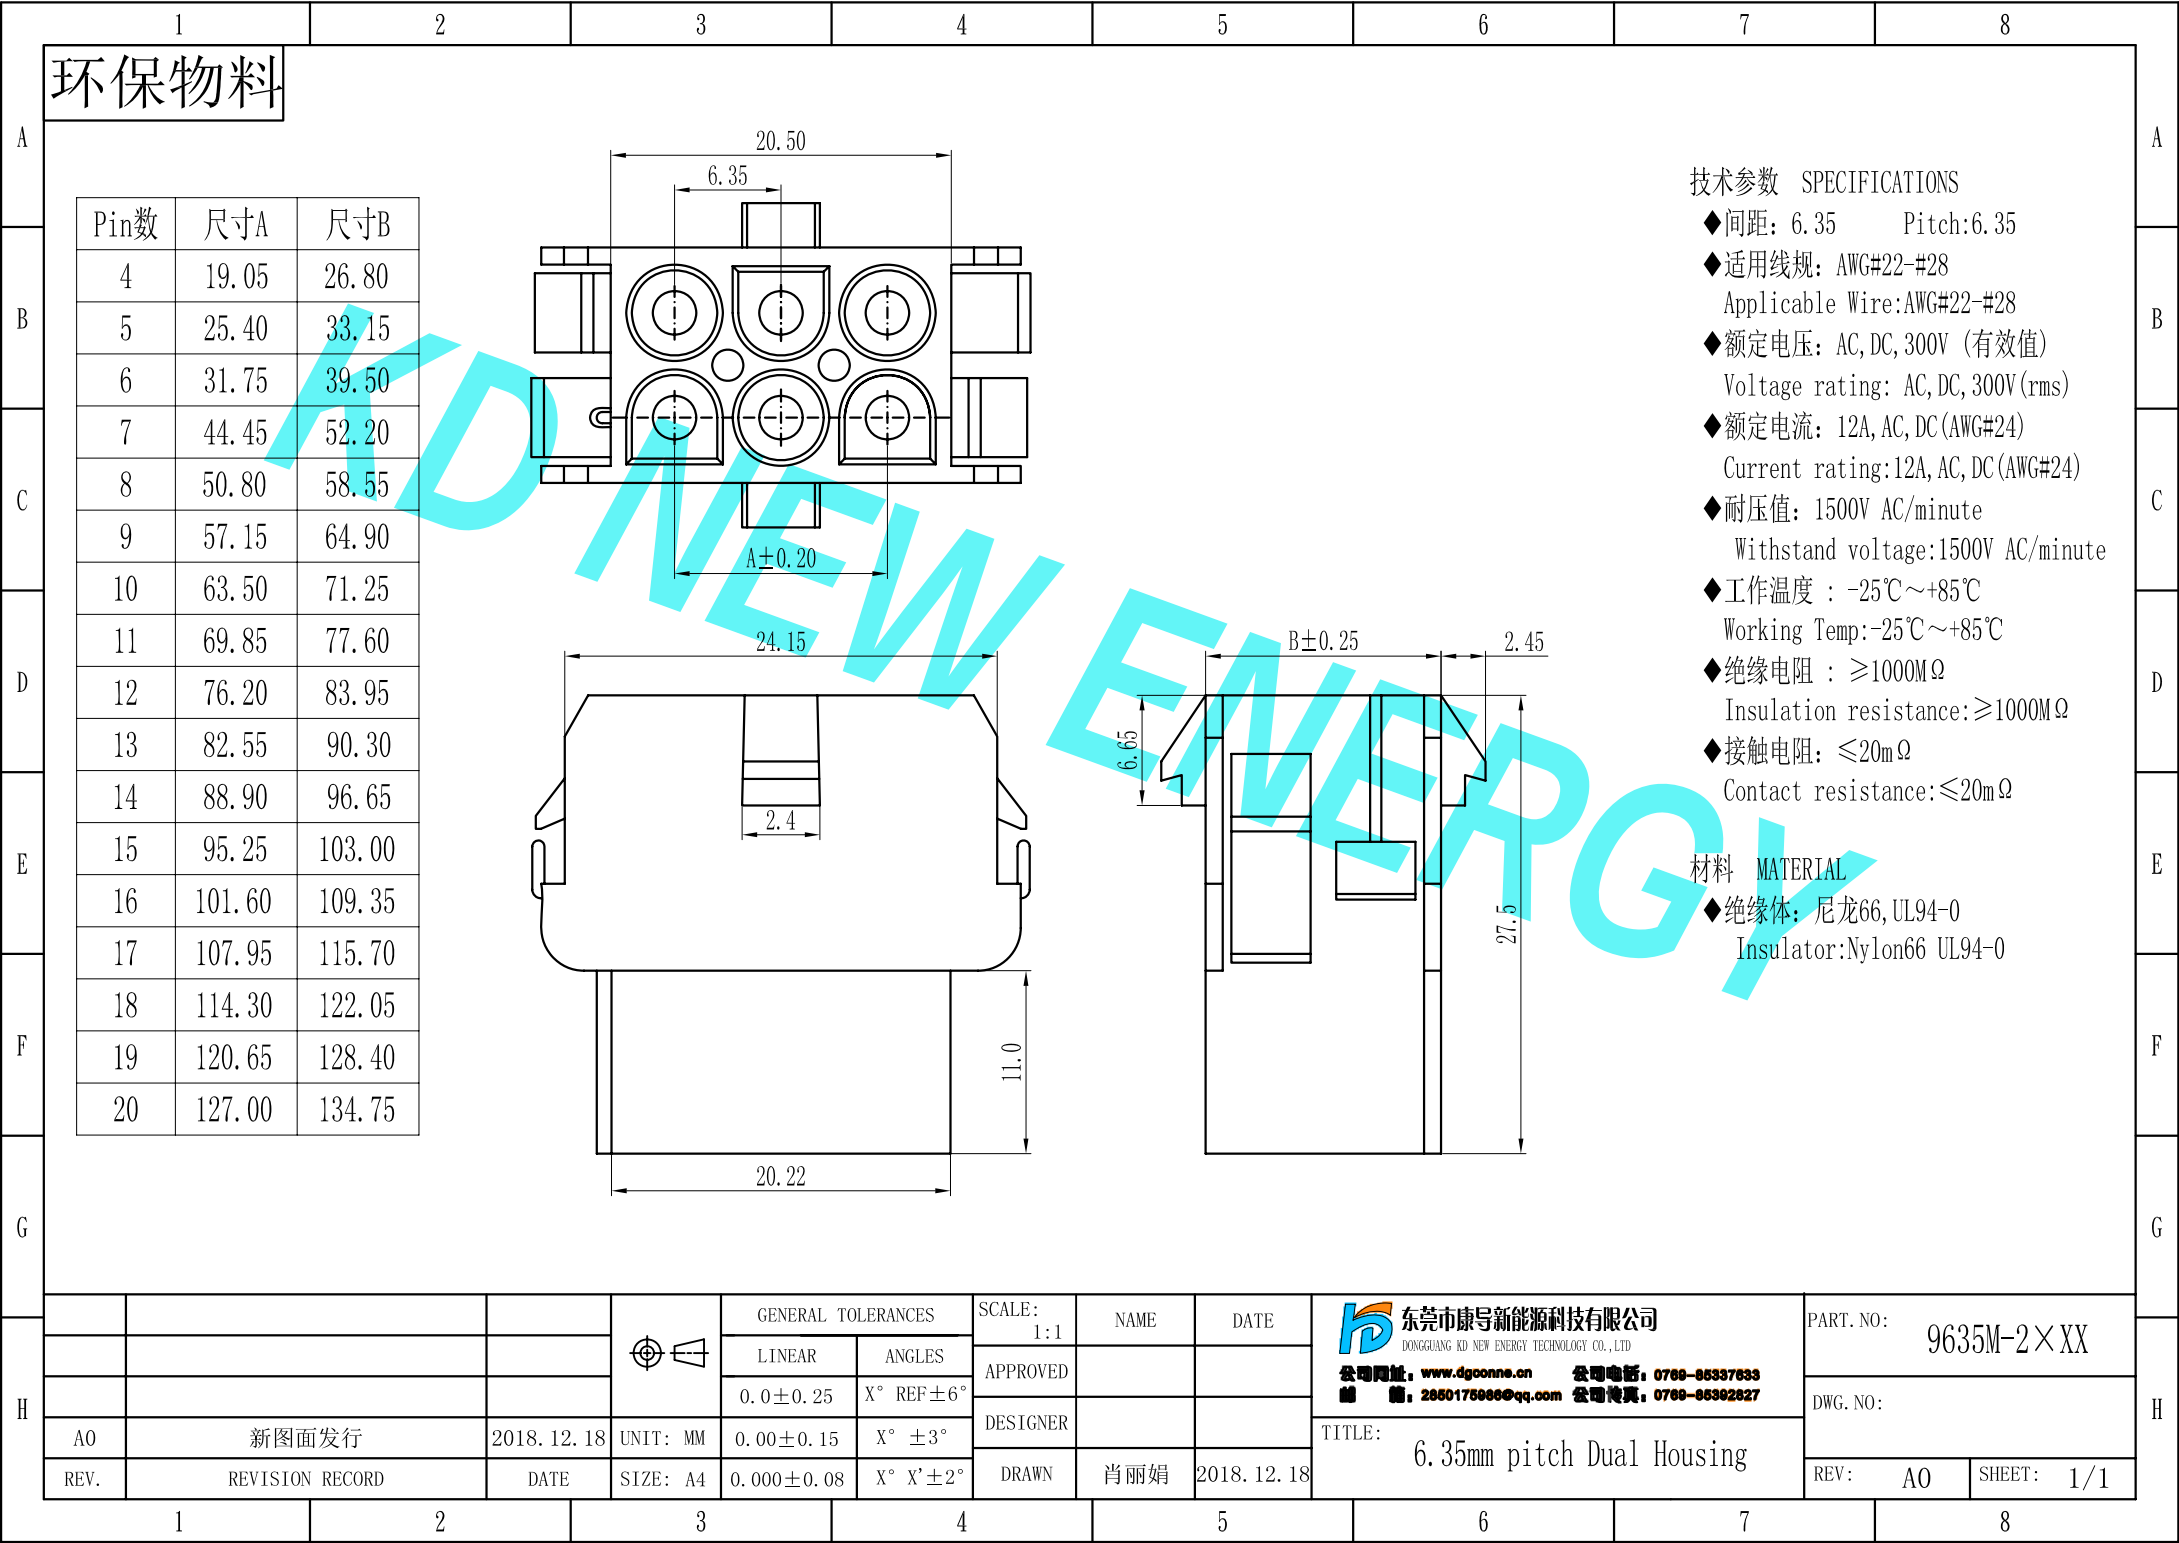

	1	2	3	4	5	6	7	8
A	环保物料							
B								
C								
D								
E								
F								
G								
H								

Pin数	尺寸A	尺寸B
4	19.05	26.80
5	25.40	33.15
6	31.75	39.50
7	44.45	52.20
8	50.80	58.55
9	57.15	64.90
10	63.50	71.25
11	69.85	77.60
12	76.20	83.95
13	82.55	90.30
14	88.90	96.65
15	95.25	103.00
16	101.60	109.35
17	107.95	115.70
18	114.30	122.05
19	120.65	128.40
20	127.00	134.75

Top View Dimensions:
Overall width: 20.50
Pitch: 6.35
Hole diameter: A±0.20
Mounting tab width: 2.4

Front View Dimensions:
Total height: 11.0
Base width: 20.22
Internal width: 24.15

Side View Dimensions:
Height: 27.5
Width: B±0.25
Mounting tab thickness: 2.45
Internal depth: 6.65

技术参数 SPECIFICATIONS

- ◆间距: 6.35 Pitch:6.35
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)
- ◆额定电流: 12A, AC, DC (AWG#24)
Current rating:12A, AC, DC (AWG#24)
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度 : -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻 : ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

	GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgkoonne.cn 公司电话: 0769-65337633 邮箱: 2850175966@qq.com 公司传真: 0769-65362627	PART. NO:
	LINEAR	ANGLES	1:1				9635M-2×XX
	0.0±0.25	X° REF±6°	APPROVED				DWG. NO:
	0.00±0.15	X° ±3°	DESIGNER				REV: AO SHEET: 1/1
AO	新图面发行		2018.12.18	UNIT: MM	0.00±0.15	X° ±3°	TITLE:
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN 肖丽娟 2018.12.18

1

2

3

4

5

6

7

8

- 1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

环保物料

Pin数	尺寸A	尺寸B
4	19.05	26.80
5	25.40	33.15
6	31.75	39.50
7	44.45	52.20
8	50.80	58.55
9	57.15	64.90
10	63.50	71.25
11	69.85	77.60
12	76.20	83.95
13	82.55	90.30
14	88.90	96.65
15	95.25	103.00
16	101.60	109.35
17	107.95	115.70
18	114.30	122.05
19	120.65	128.40
20	127.00	134.75

20.50

6.35

A±0.20

24.15

2.4

11.0

20.22

B±0.25

2.45

6.65

27.5

技术参数 SPECIFICATIONS

◆间距: 6.35 Pitch:6.35

◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28

◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)

◆额定电流: 12A, AC, DC (AWG#24)
Current rating:12A, AC, DC (AWG#24)

◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute

◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃

◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ

◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgkoonne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85362627	PART. NO:		9635M-2×XX			
				LINEAR	ANGLES					APPROVED			DWG. NO:		
				0.0±0.25	X° REF±6°					DESIGNER			REV:		A0
A0	新图面发行		2018.12.18	UNIT: MM	0.00±0.15	X° ±3°				SHEET:		1/1			
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟		2018.12.18	TITLE: 6.35mm pitch Dual Housing				

1

2

3

4

5

6

7

8

	1	2	3	4	5	6	7	8
A	环保物料							
B								
C								
D								
E								
F								
G								
H								

Pin数	尺寸A	尺寸B
4	19.05	26.80
5	25.40	33.15
6	31.75	39.50
7	44.45	52.20
8	50.80	58.55
9	57.15	64.90
10	63.50	71.25
11	69.85	77.60
12	76.20	83.95
13	82.55	90.30
14	88.90	96.65
15	95.25	103.00
16	101.60	109.35
17	107.95	115.70
18	114.30	122.05
19	120.65	128.40
20	127.00	134.75

Top View Dimensions:
Overall width: 20.50
Pitch: 6.35
Housing width: A ± 0.20
Terminal width: 2.4

Front View Dimensions:
Overall width: 20.22
Height: 11.0
Terminal height: 2.4

Side View Dimensions:
Overall depth: B ± 0.25
Terminal depth: 2.45
Internal depth: 27.5

技术参数 SPECIFICATIONS

- ◆间距: 6.35 Pitch: 6.35
- ◆适用线规: AWG#22-#28
Applicable Wire: AWG#22-#28
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)
- ◆额定电流: 12A, AC, DC (AWG#24)
Current rating: 12A, AC, DC (AWG#24)
- ◆耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp: -25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance: ≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator: Nylon66 UL94-0

	GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司地址: www.dgkoonne.cn 公司电话: 0769-65337633 邮箱: 2850175966@qq.com 公司传真: 0769-65362627	PART. NO:
	LINEAR	ANGLES	1:1				9635M-2×XX
	0.0±0.25	X° REF±6°	APPROVED				DWG. NO:
	0.00±0.15	X° ±3°	DESIGNER				REV: AO SHEET: 1/1
AO	新图面发行		2018.12.18	UNIT: MM	0.00±0.15	X° ±3°	TITLE:
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN 肖丽娟 2018.12.18

1

2

3

4

5

6

7

8

- 1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

环保物料

Pin数	尺寸A	尺寸B
4	19.05	26.80
5	25.40	33.15
6	31.75	39.50
7	44.45	52.20
8	50.80	58.55
9	57.15	64.90
10	63.50	71.25
11	69.85	77.60
12	76.20	83.95
13	82.55	90.30
14	88.90	96.65
15	95.25	103.00
16	101.60	109.35
17	107.95	115.70
18	114.30	122.05
19	120.65	128.40
20	127.00	134.75

20.50

6.35

A±0.20

24.15

2.4

11.0

20.22

B±0.25

2.45

6.65

27.5

技术参数 SPECIFICATIONS

◆间距: 6.35 Pitch:6.35

◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28

◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)

◆额定电流: 12A, AC, DC (AWG#24)
Current rating:12A, AC, DC (AWG#24)

◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute

◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃

◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ

◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgkoonne.cn 公司电话: 0769-65337633 邮箱: 2850175966@qq.com 公司传真: 0769-65362627	PART. NO:		9635M-2×XX			
				LINEAR	ANGLES					APPROVED			DWG. NO:		
				0.0±0.25	X° REF±6°					DESIGNER			REV:		A0
A0	新图面发行	2018.12.18	UNIT: MM	0.00±0.15	X° ±3°					SHEET: 1/1					
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18		TITLE: 6.35mm pitch Dual Housing					

1

2

3

4

5

6

7

8

环保物料

Pin数	尺寸A	尺寸B
4	19.05	26.80
5	25.40	33.15
6	31.75	39.50
7	44.45	52.20
8	50.80	58.55
9	57.15	64.90
10	63.50	71.25
11	69.85	77.60
12	76.20	83.95
13	82.55	90.30
14	88.90	96.65
15	95.25	103.00
16	101.60	109.35
17	107.95	115.70
18	114.30	122.05
19	120.65	128.40
20	127.00	134.75

技术参数 SPECIFICATIONS

- ◆间距: 6.35 Pitch:6.35
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 300V (有效值)
Voltage rating: AC, DC, 300V(rms)
- ◆额定电流: 12A, AC, DC (AWG#24)
Current rating:12A, AC, DC (AWG#24)
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgkoonne.cn 公司电话: 0769-65337633 邮箱: 2850175966@qq.com 公司传真: 0769-65362627	PART. NO:		
				LINEAR	ANGLES					APPROVED	9635M-2×XX	
				0.0±0.25	X° REF±6°					DESIGNER	DWG. NO:	
A0	新图面发行	2018.12.18	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.12.18		TITLE:	REV: A0	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°						SHEET: 1/1	