




环保物料

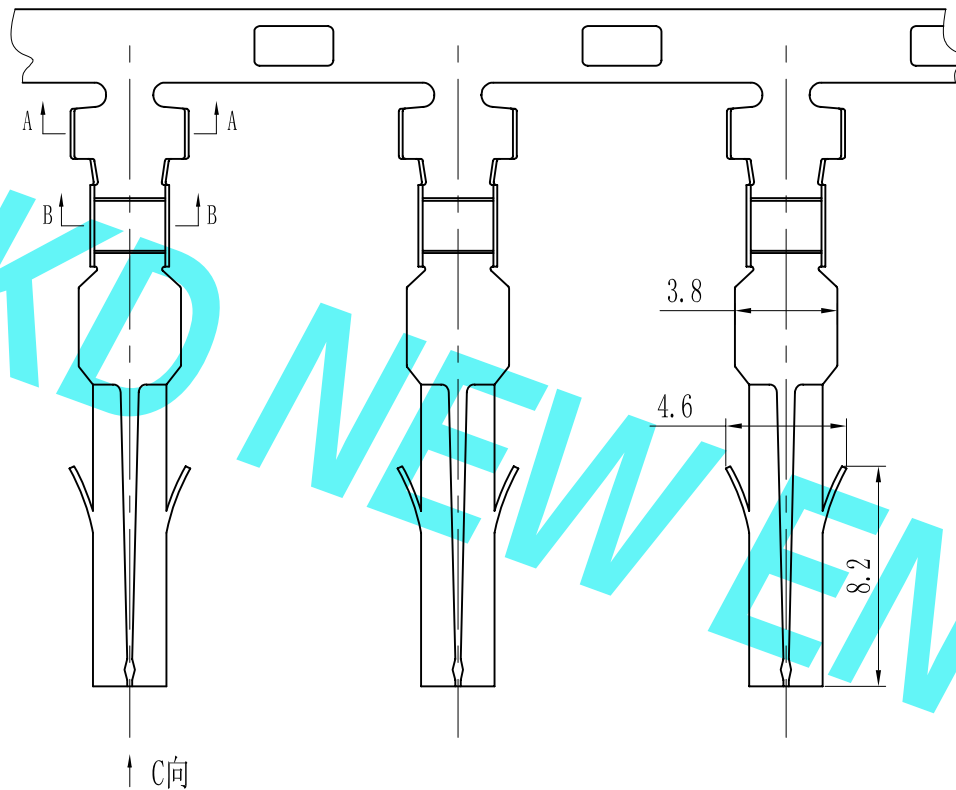

Section: A-A



Section: B-B



NOTE:

接触电阻: $\leq 0.02 \Omega$

Contac resistance: $\leq 0.02 \Omega$

MATERIAL

外壳: 尼龙66 UL94V-2

Housing: NY LON66 UL94V-2

端子: 磷青铜

Terminal: Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 3191-AT		
				LINEAR	ANGLES	APPROVED						DWG. NO:
				0.0±0.25	X° REF±6°	DESIGNER						
AO	新图面发行	2018.12.18	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.12.18		TITLE: 6.70mm pitch Crimp Terminal	REV: AO SHEET: 1/1	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°							