


环保物料

技术参数 SPECIFICATIONS

- ◆间距: 6.2 Pitch:6.2
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 300-600V (有效值)
Voltage rating: AC, DC, 300-600V (rms)
- ◆额定电流: 9-15A, AC, DC
Current rating:9-15A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$
Working Temp: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

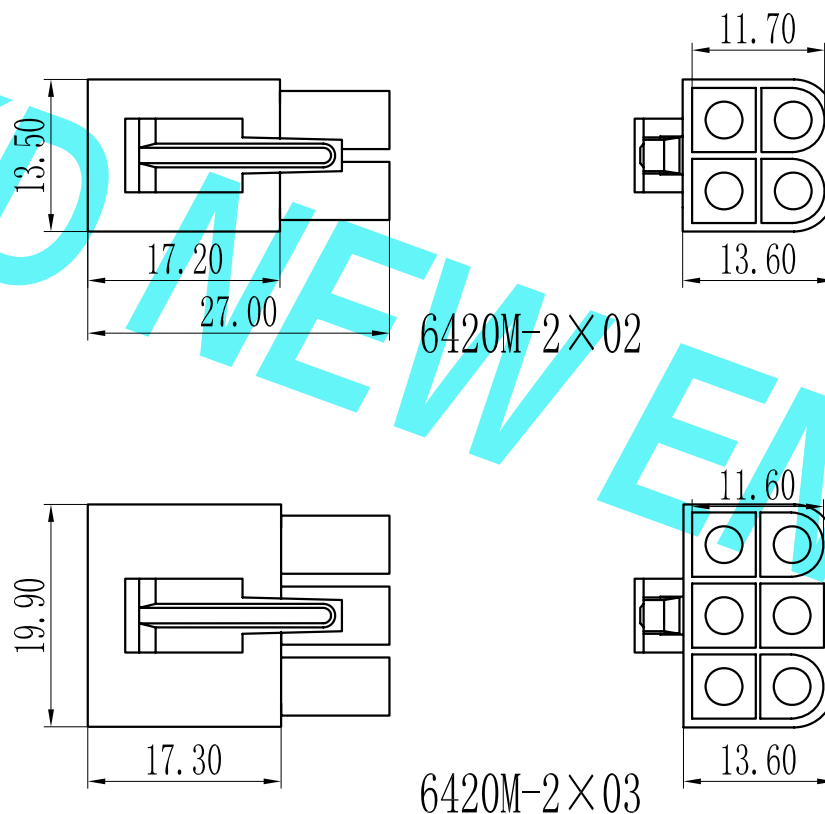

6420M-2×02

6420M-2×03

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 6420M-2×XX		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
				0.0±0.25	X° REF±6°							
A0	新图面发行	2018.12.17	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER					TITLE: 6.20mm pitch Dual Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.17			REV: A0	SHEET: 1/1