







环保物料



6420F-3×03



6420F-3×04

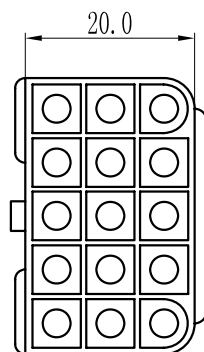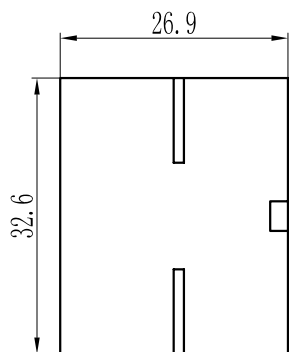

6420F-3×05

技术参数 SPECIFICATIONS

- ◆间距: 6.2 Pitch:6.2
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC, 300-600V (有效值)
Voltage rating: AC,DC, 300-600V(rms)
- ◆额定电流: 9-15A, AC, DC
Current rating:9-15A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -20℃~+85℃
Working Temp:-20℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 6420F-3×XX		
				LINEAR	ANGLES					APPROVED		
				0. 0±0. 25	X° REF±6°	DESIGNER				DWG. NO:		
A0	新图面发行	2018. 12. 17	UNIT: MM	0. 00±0. 15	X° ±3°					TITLE: 6. 20mm pitch Three Housing	REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 17				