


环保物料

Pin数	尺寸A	尺寸B
2		14.7
3	5.0	19.7
4	10.0	24.7
5	15.0	29.7
6	20.0	34.7

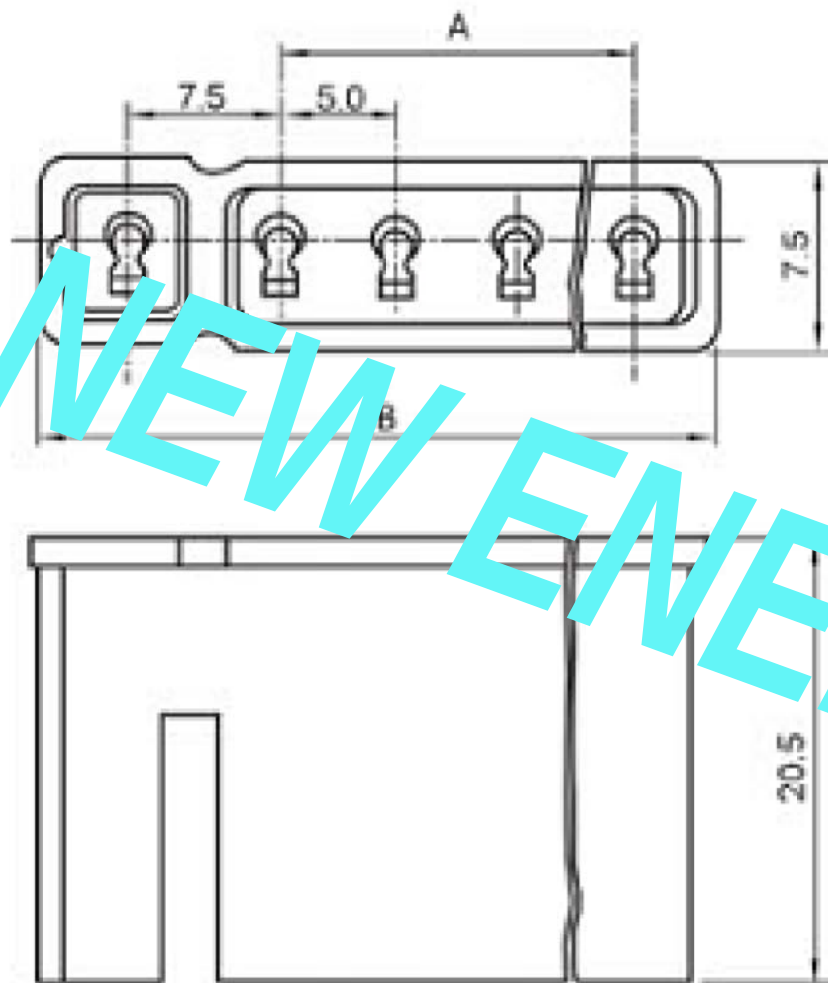

技术参数 SPECIFICATIONS

- ◆间距: 7.5/5.0 Pitch:7.5/5.0
- ◆适用线规: AWG#26-#20
Applicable Wire:AWG#26-#20
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆外壳: 尼龙66, UL94V-0
Housing: Nylon66 UL94V-0
- ◆针: 尼龙66, UL94V-0
Pin: Nylon66 UL94V-0
- ◆插座: 尼龙66 UL94V-0
Wafer:Nylon66 UL94V-0
- 2. 插针: 黄铜
- ◆端子: 磷青铜
Terminal:Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: STV5-XY		
				LINEAR	ANGLES	APPROVED						DWG. NO:
				0.0±0.25	X° REF±6°							
A0	新图面发行	2018.12.18		UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 7.50-5.00mm pitch Single Housing	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18	REV: A0 SHEET: 1/1			