


环保物料

Pin数	尺寸A	尺寸B
3	12.50	17.50
4	17.50	22.50
5	22.50	27.50
6	27.50	32.50
7	32.50	37.50
8	37.50	42.50
9	42.50	47.50
10	47.50	52.50
11	52.50	57.50
12	57.50	62.50
13	62.50	67.50
14	67.50	72.50
15	72.50	77.50
16	77.50	82.50
17	82.50	87.50
18	87.50	92.50
19	92.50	97.50
20	97.50	102.50

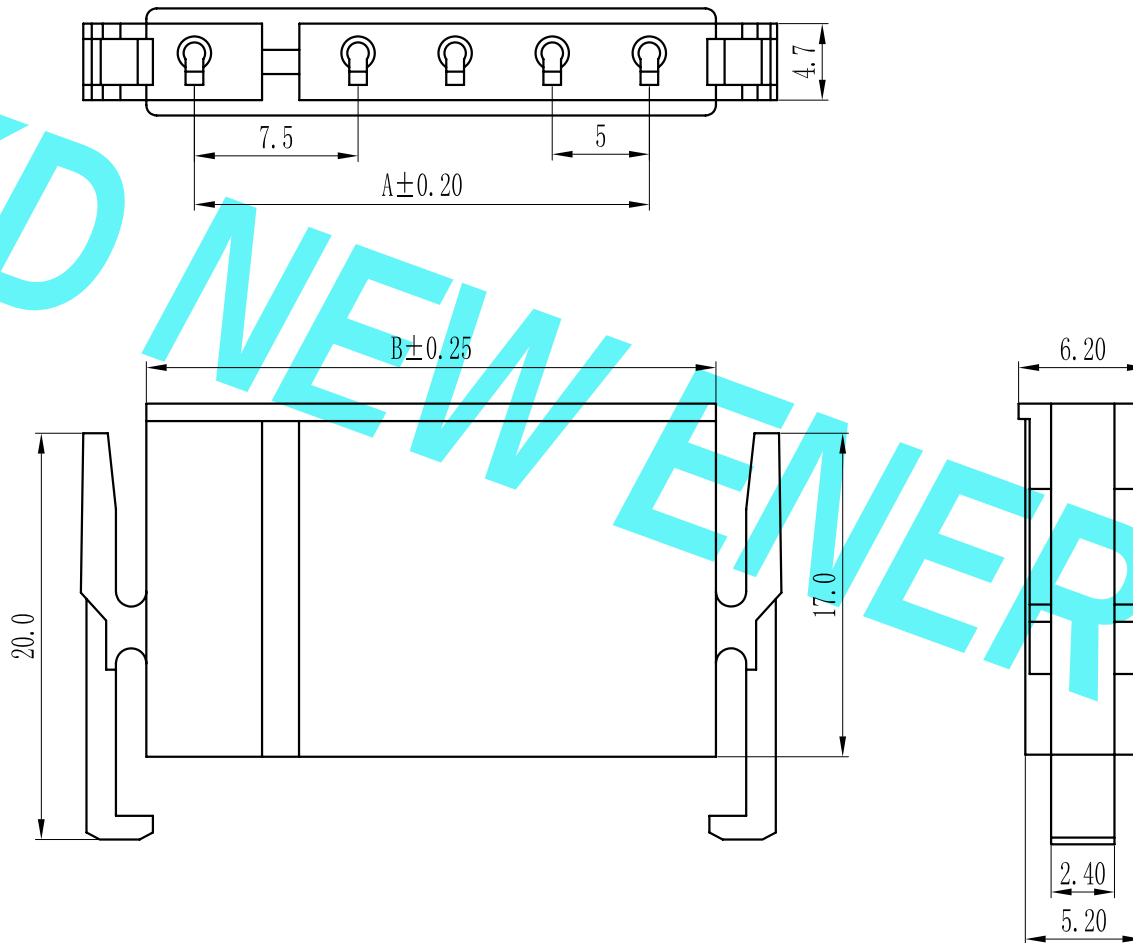

- 技术参数 SPECIFICATIONS
- ◆间距：7.5/5.0 Pitch:7.5/5.0
 - ◆适用线规：AWG#26-#14
Applicable Wire:AWG#26-#14
 - ◆额定电压：AC,DC,250V（有效值）
Voltage rating: AC,DC,250V(rms)
 - ◆额定电流：5A,AC,DC
Current rating:5A,AC,DC
 - ◆耐压值：1500V AC/minute
Withstand voltage:1500V AC/minute
 - ◆工作温度：-25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻：≥1000MΩ
Insulation resistance:≥1000MΩ
 - ◆接触电阻：≤20mΩ
Contact resistance:≤20mΩ
- 材料 MATERIAL
- ◆绝缘体：尼龙66,UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 7550H-XX		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.12.18		UNIT: MM	0.00±0.15	X° ±3°					TITLE: 7.50-5.00mm pitch Single Housing	REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18				