
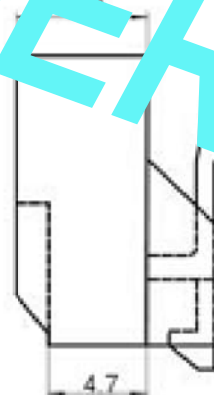


环保物料

Pin数	尺寸A	尺寸B
2	7.5	12.9
3	12.5	17.9
4	17.5	22.9
5	22.5	27.9
6	27.5	32.9
7	32.5	37.9
8	37.5	42.9

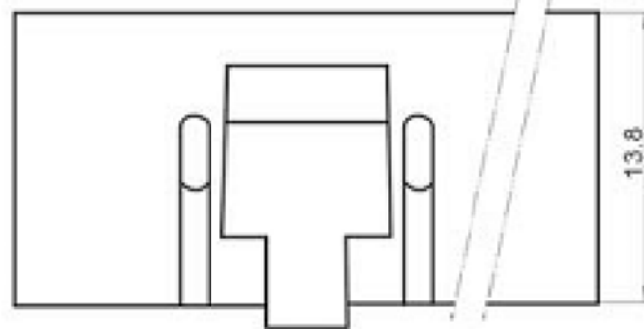

技术参数:
线数: 2~8
间距: 7.5-5.0... 5.0mm
适用线规: AWG#26~#20
额定电压: 250V DC/AC (有效值)
额定电流: 4.0A
耐压值: 1500V AC(有效值)
工作温度: -25℃~+85℃
绝缘电阻: $\geq 1000M\Omega$
接触电阻: $\leq 0.02\Omega$
适用印制板厚度: 1.6mm
材料:
外壳: 尼龙66 UL94V-0
端子: 磷青铜

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: YHL-500-NY		
				LINEAR	ANGLES	APPROVED						
				0.0±0.25	X° REF±6°							
A0	新图面发行	2018.12.18	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE:	DWG. NO:	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18		7.50-5.00mm pitch Single Housing	REV: A0	SHEET: 1/1