
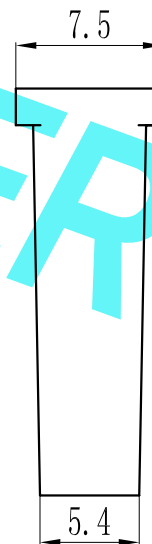
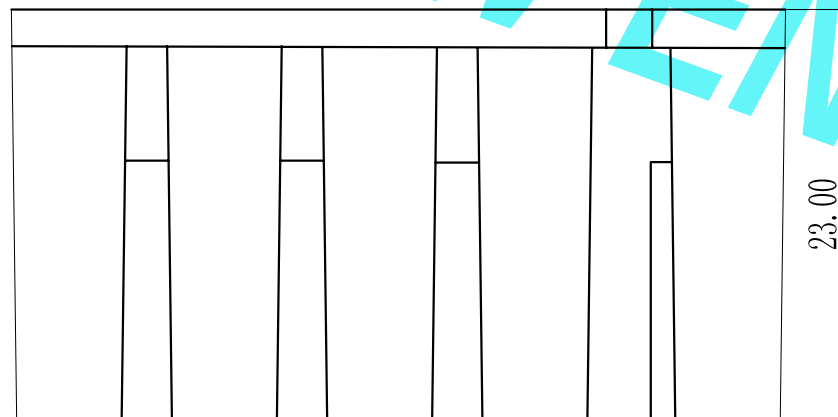


环保物料

Pin数	尺寸A	尺寸B
3	16.00	26.00
4	24.00	34.00
5	32.00	42.00
6	40.00	50.00
7	48.00	58.00
8	56.00	66.00
9	64.00	74.00
10	72.00	82.00
11	80.00	90.00
12	88.00	98.00
13	96.00	106.00
14	104.00	114.00

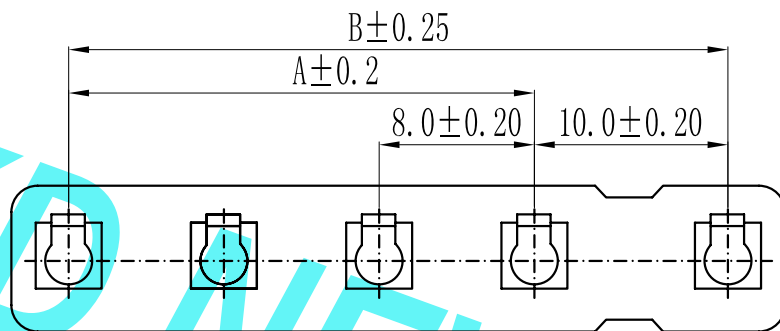

技术参数 SPECIFICATIONS

- ◆间距: 10.0/8.0 Pitch:10.0/8.0
 - ◆适用线规: AWG#20-#26
Applicable Wire:AWG#20-#26
 - ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
 - ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
 - ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
 - ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ
- 材料 MATERIAL
- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 8010-XX	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.12.18	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 8.00mm pitch Single Housing	REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18			