
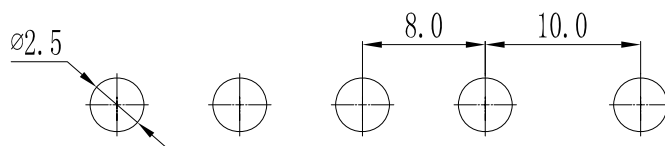
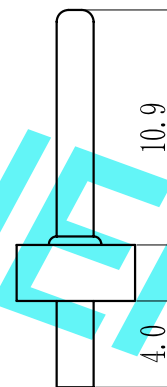
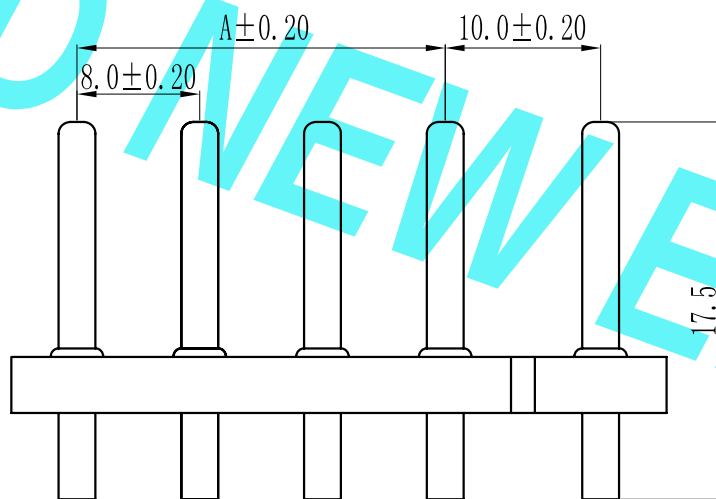


环保物料

Pin数	尺寸A	尺寸B
3	16.00	26.00
4	24.00	34.00
5	32.00	42.00
6	40.00	50.00
7	48.00	58.00
8	56.00	66.00
9	64.00	74.00
10	72.00	82.00
11	80.00	90.00
12	88.00	98.00
13	96.00	106.00
14	104.00	114.00

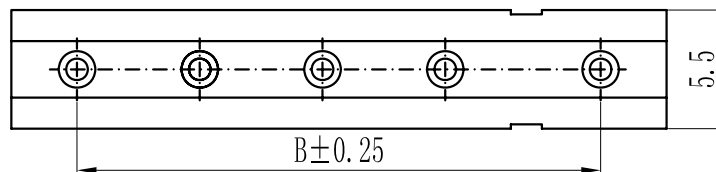

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆间距: 10.0/8.0 Pitch:10.0/8.0
- ◆适用线规: AWG#20-#26
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC,250V (有效值)
Voltage rating: AC,DC,250V(rms)
- ◆额定电流: 5A,AC,DC
Current rating:5A,AC,DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66,UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 8011-XX		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.12.18	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 8.00mm pitch Single Wafer	REV:	A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18				