


环保物料

Pin数	尺寸A	尺寸B
3	12.00	20.00
4	18.00	28.00
5	24.00	36.00
6	30.00	44.00
7	36.00	52.00
8	42.00	60.00
9	48.00	68.00
10	54.00	76.00
11	60.00	84.00
12	66.00	92.00
13	72.00	100.00
14	78.00	108.00

外壳 <Y>
HOUSING

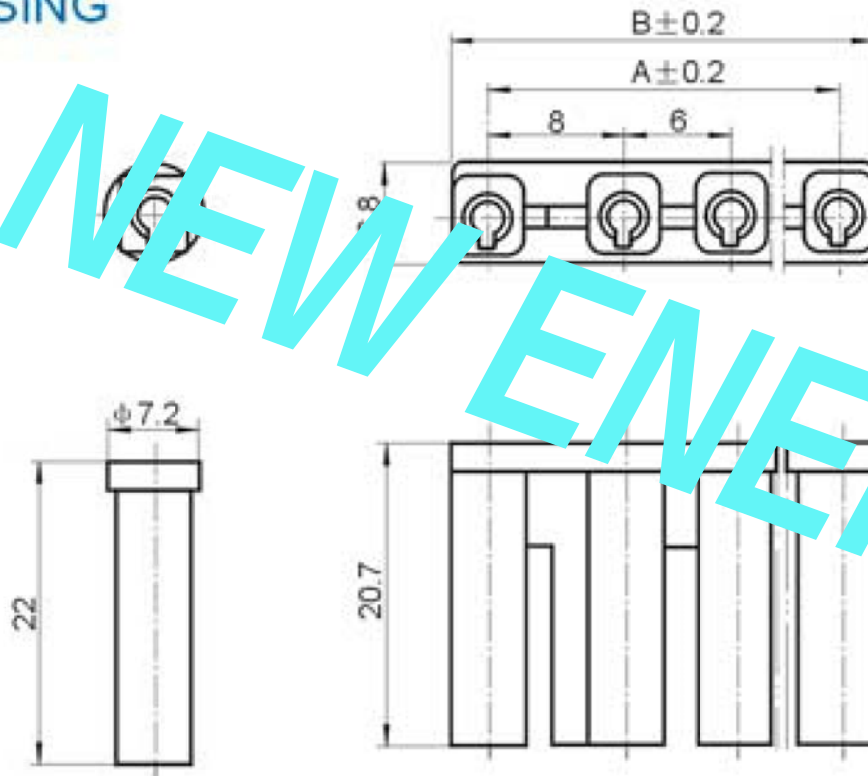

技术参数 SPECIFICATIONS

- ◆间距: 8.0/6.0 Pitch:8.0/6.0
- ◆适用线规: AWG#20-#26
Applicable Wire:AWG#20-#26
- ◆额定电压: AC,DC,250V (有效值)
Voltage rating: AC,DC,250V(rms)
- ◆额定电流: 5A,AC,DC
Current rating:5A,AC,DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ
- 材料 MATERIAL
◆绝缘: 尼龙66,UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°	APPROVED		
				0.00±0.15	X° ±3°			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18

东莞市康导新能源科技有限公司
DONGGUAN KID NEW ENERGY TECHNOLOGY CO.,LTD
公司网址: www.dgoonne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:
8.00-6.00mm pitch Single Housing

PART. NO: TJC4-NY

DWG. NO:

REV: A0 SHEET: 1/1