


环保物料

Pin数	尺寸A	尺寸B
4	2.40	5.40
5	3.20	6.20
6	4.00	7.00
7	4.80	7.80
8	5.60	8.60
9	6.40	9.40
10	7.20	10.20
11	8.00	11.00
12	8.80	11.80
13	9.60	12.60
14	11.20	13.40
15	12.00	14.20
16	12.80	15.00
17	13.60	15.80
18	14.40	16.60
19	15.20	17.40
20	16.00	18.20
21	16.80	19.00
22	17.60	19.80
23	18.40	20.60
24	19.20	21.40
25	20.00	22.20
26	20.80	23.00
27	21.60	23.80

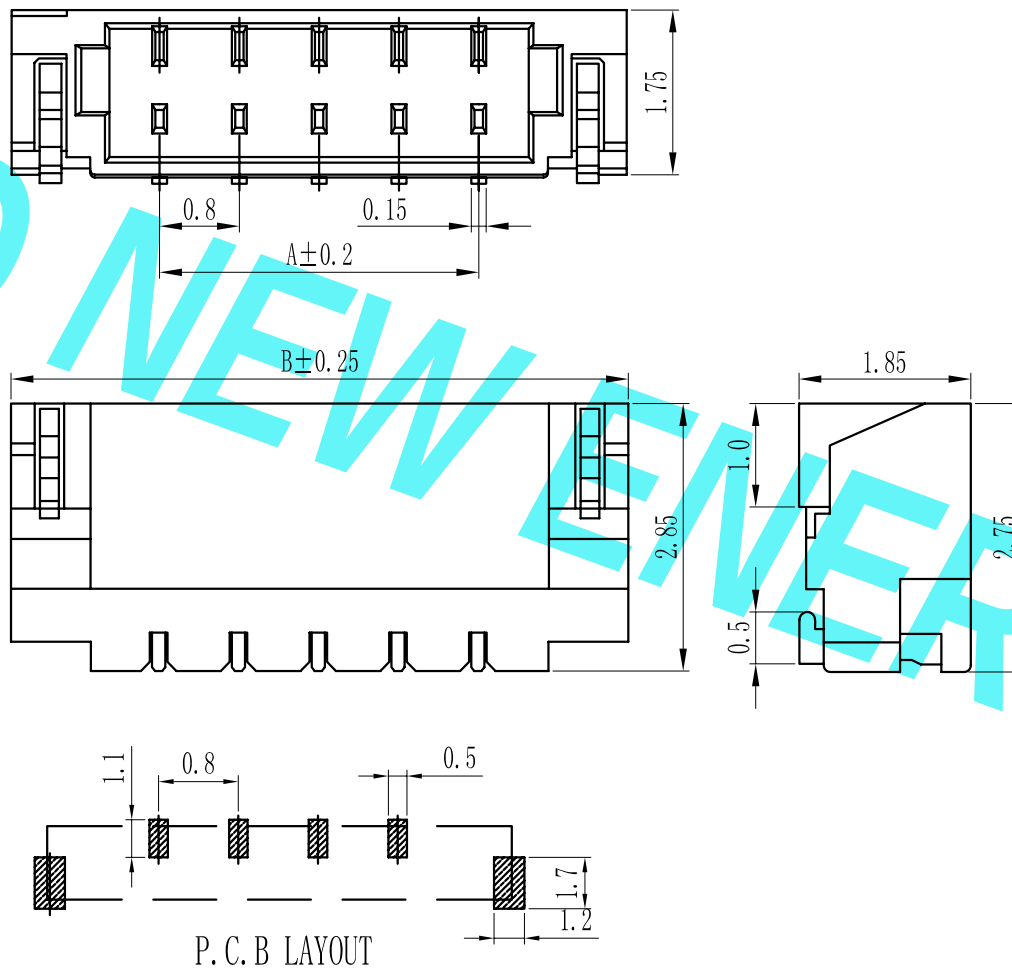

技术参数 SPECIFICATIONS

- ◆线数: 2-22 Poles:2-22
- ◆额定电压: AC, DC, 100V
Voltage rating: AC, DC, 100V
- ◆额定电流: 0.2A, DC (AWG#36)
Current rating: 0.2A, DC (AWG#36)
- ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 100\text{M}\Omega$
Insulation resistance: $\geq 100\text{M}\Omega$
- ◆接触电阻: $\leq 0.02\text{m}\Omega$
Contact resistance: $\leq 0.02\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: UL94-V0
Insulator: UL94-V0
- ◆接触针: 磷铜/黄铜
Contact PIN: Phosphor Bronze/Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: SURO.8T-LT
				LINEAR	ANGLES	APPROVED				DWG. NO:
				0.0 $\pm$ 0.25	X° REF $\pm$ 6°	DESIGNER				REV: A0
A0	新图面发行	2018.12.01		0.00 $\pm$ 0.15	X° $\pm$ 3°	DRAWN	肖丽娟	2018.12.01		SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 $\pm$ 0.08	X° X' $\pm$ 2°				0.80mm pitch Single Wafer	