
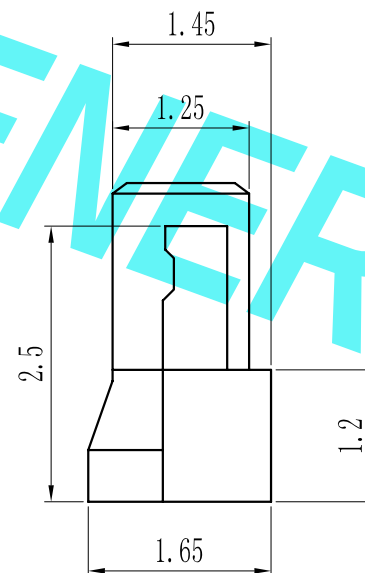
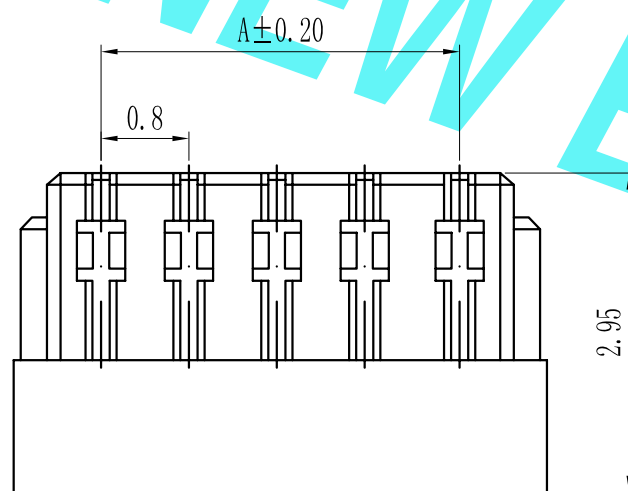


环保物料

Pin数	尺寸A	尺寸B
4	2.40	4.80
5	3.20	5.60
6	4.00	6.40
7	4.80	7.20
8	5.60	8.00
9	6.40	8.80
10	7.20	9.60
11	8.00	11.20
12	8.80	12.00
13	9.60	12.80
14	11.20	13.60
15	12.00	14.40
16	12.80	15.20
17	13.60	16.00
18	14.40	16.80
19	15.20	17.60
20	16.00	18.40
21	16.80	19.20
22	17.60	20.00
23	18.40	20.80
24	19.20	21.60
25	20.00	22.40
26	20.80	23.20
27	21.60	24.00

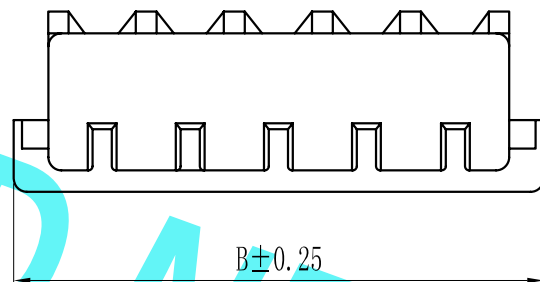

技术参数 SPECIFICATIONS

- ◆线数: 2-22 Poles:2-22
- ◆额定电压: AC, DC, 30V (50有效值)
Voltage rating: AC, DC, 30V (50HZ)
- ◆额定电流: 0.2A, DC (AWG#36)
Current rating: 0.2A, DC (AWG#36)
- ◆耐压值: 200V AC/minute
Withstand voltage: 200V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp: -25℃~+85℃
- ◆绝缘电阻: ≥100MΩ
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤0.02mΩ
Contact resistance: ≤0.02mΩ
- ◆绝缘体: UL94-V0
Insulator: UL94-V0
- ◆接触针: 磷铜/黄铜
Contact PIN: Phosphor Bronze/Brass

材料 MATERIAL

A0		新图面发行	2018. 12. 01	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖丽娟	2018. 12. 01	TITLE: 0.80mm pitch Single Housing		REV: A0	SHEET: 1/1
REV.		REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 01	PART. NO: SURO. 8T-NY		DWG. NO:	


东莞市康导新能源科技有限公司
 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD.
 公司网址: www.dgoonne.cn 公司电话: 0769-85337533
 邮箱: 2850175986@qq.com 公司传真: 0769-85392827