


环保物料

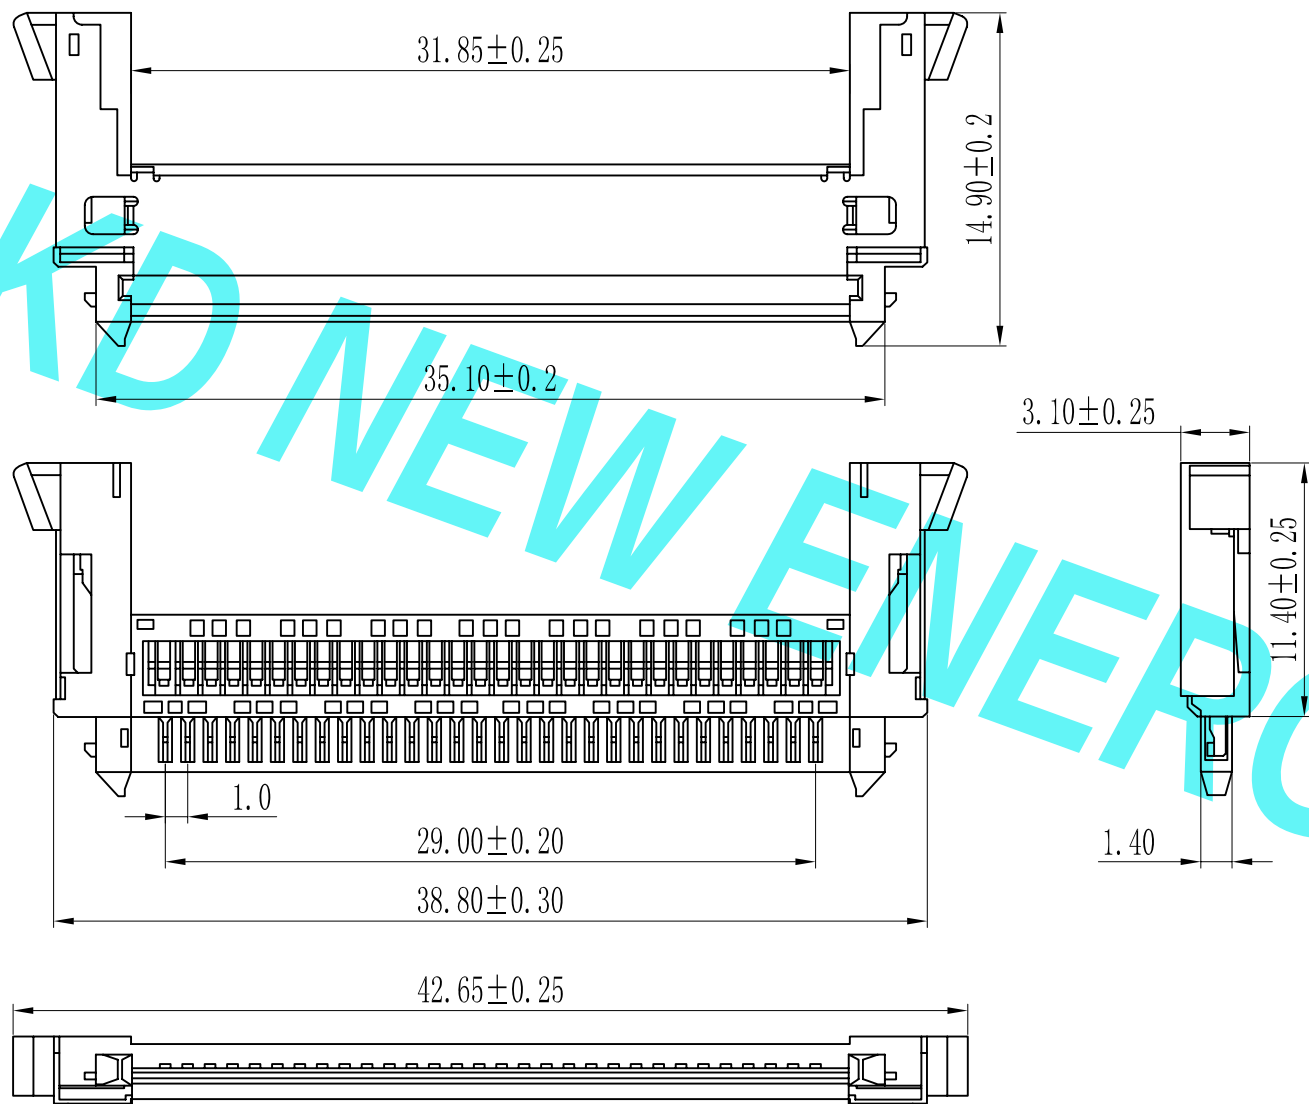

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 50V DC, AC(rms)
Rated voltage: 50V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $100\text{M}\Omega$ Min
Insulation resistance: $\geq 100\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙9T, UL94-V0
Insulator: Nylon9T, UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: F1-E-HL(1.0)		
				LINEAR	ANGLES	APPROVED						DWG. NO:
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.12.03		UNIT: MM	0.00±0.15	X° ±3°						
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.03				