


环保物料

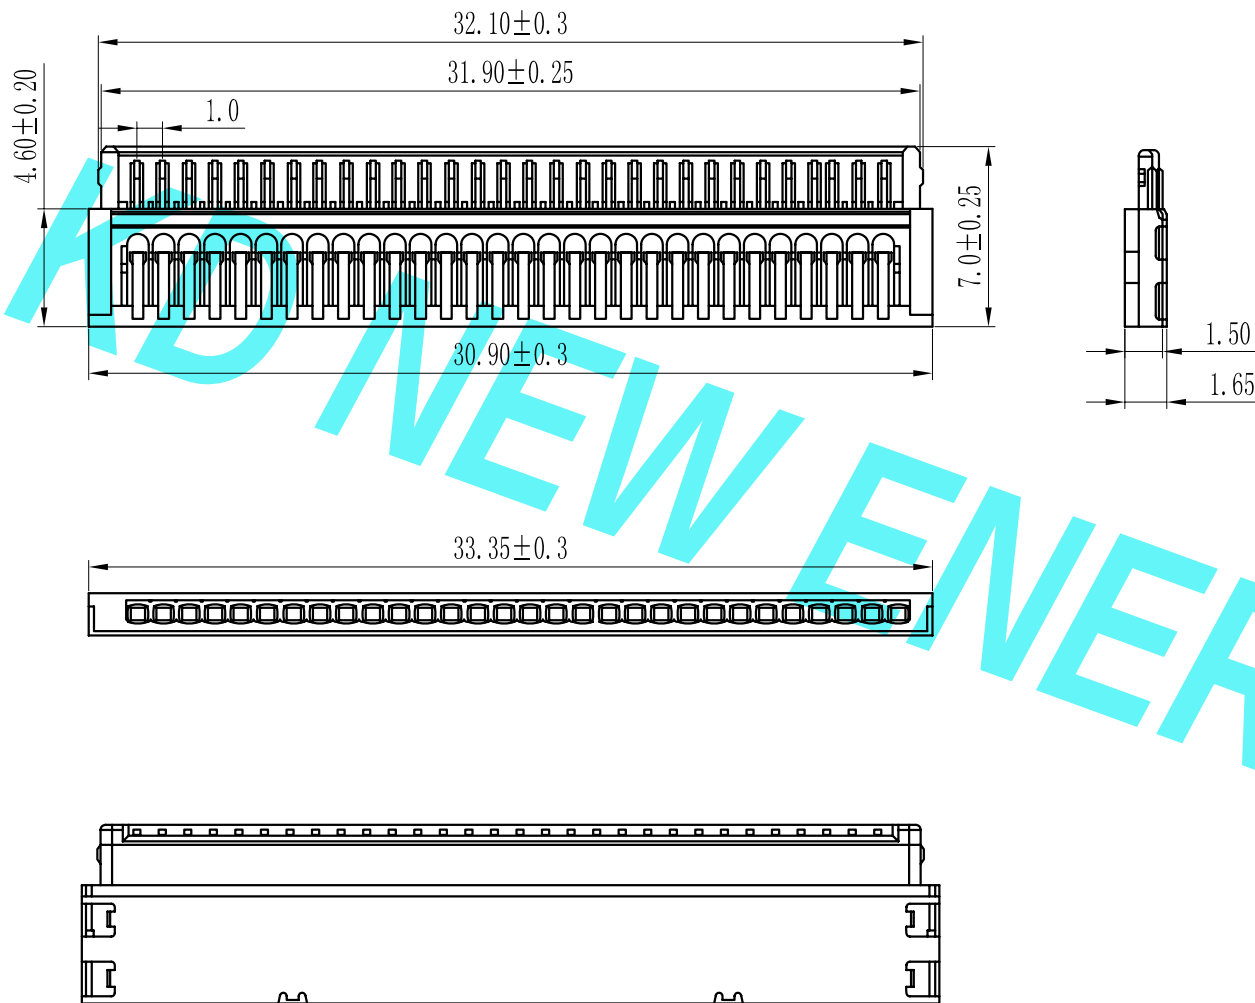

技术参数 SPECIFICATIONS

◆适用线规: AWG#28~#32

Applicable Wire: AWG#28~#32

◆额定电压: 50V DC, AC(rms)

Rated voltage: 50V DC, AC(rms)

◆额定电流: 1A (AWG #28)

Rated Current: 1A (AWG #28)

◆耐压值: 500V AC/minute

Withstand voltage: 500V

AC/min

◆工作温度: -25℃~+85℃

Working Temp: -25℃~+85℃

◆绝缘电阻: 100MΩ Min

Insulation

resistance: ≥100MΩ

◆接触电阻: ≤20mΩ

Contact resistance: ≤20mΩ

材料 MATERIAL

◆绝缘体: 尼龙9T, UL94-V0

Insulator: Nylon9T, UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: F1-X-H(1.0)			
				LINEAR	ANGLES					APPROVED			DWG. NO:
				0.0±0.25	X° REF±6°								
A0	新图面发行	2018.12.03	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE: 1.00mm pitch Single Housing	REV: A0	SHEET: 1/1		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.03					