


环保物料

Pin数	尺寸A	尺寸B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	11.50
7	9.00	13.00
8	10.50	14.50
9	12.00	16.00
10	13.50	17.50
11	15.00	19.00
12	16.50	20.50
13	18.00	22.00
14	19.50	23.50
15	21.00	25.00
16	22.50	26.50
17	24.00	28.00
18	25.50	29.50
19	27.00	31.00
20	28.50	32.50
21	30.00	34.00
22	31.50	35.50
23	33.00	37.00
24	34.50	38.50
25	36.00	40.00

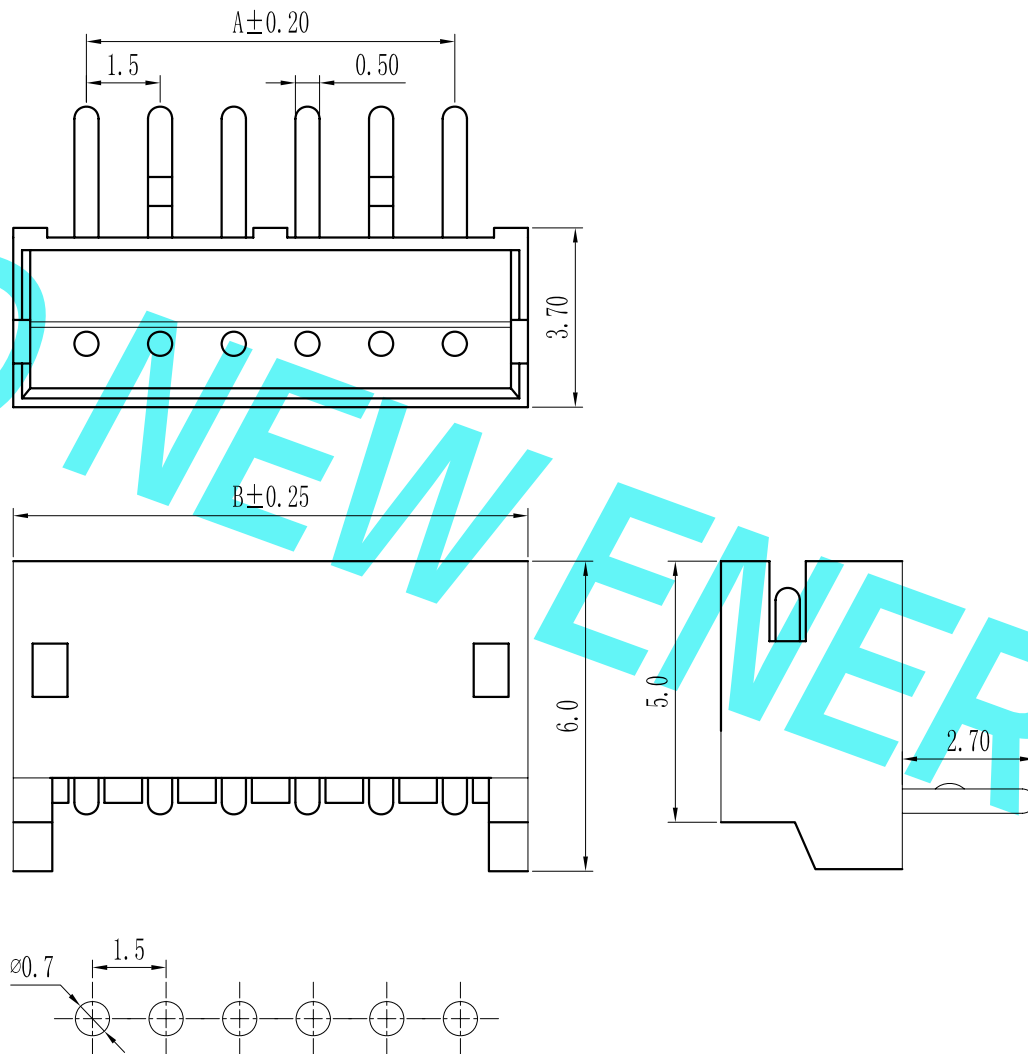

技术参数 SPECIFICATIONS

- ◆间距: 1.5 Pitch:1.5
 - ◆适用线规: AWG#26-#30
Applicable Wire:AWG#26-#30
 - ◆额定电压: AC,DC, 100V (有效值)
Voltage rating: AC,DC, 100V(rms)
 - ◆额定电流: 1.0A, AC,DC
Current rating:1.0A, AC,DC
 - ◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
 - ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻: $\geq 500M\Omega$
Insulation resistance: $\geq 500M\Omega$
 - ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$
- 材料 MATERIAL
- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0
 - ◆接触针:磷青铜
Contact PIN: Phosphor bronze

P.C.B LAYOUT

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: ZH1.5T-1-NAW
					LINEAR	ANGLES	APPROVED			DWG. NO:
					0.0±0.25	X° REF±6°	DESIGNER			REV: A0
A0	新图面发行	2018.12.04	UNIT: MM		0.00±0.15	X° ±3°	DRAWN	肖丽娟		SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4		0.000±0.08	X° X'±2°			TITLE: 1.50mm pitch Single Wafer	