


环保物料

Pin数	尺寸A	尺寸B
2	1.50	4.10
3	3.00	5.60
4	4.50	7.10
5	6.00	8.60
6	7.50	10.10
7	9.00	11.60
8	10.50	13.10
9	12.00	14.60
10	13.50	16.10
11	15.00	17.60
12	16.50	19.10
13	18.00	20.60
14	19.50	22.10
15	21.00	23.60
16	22.50	25.10
17	24.00	26.60
18	25.50	28.10
19	27.00	29.60
20	28.50	31.10
21	30.00	32.60
22	31.50	34.10
23	33.00	35.60
24	34.50	37.10
25	36.00	38.60

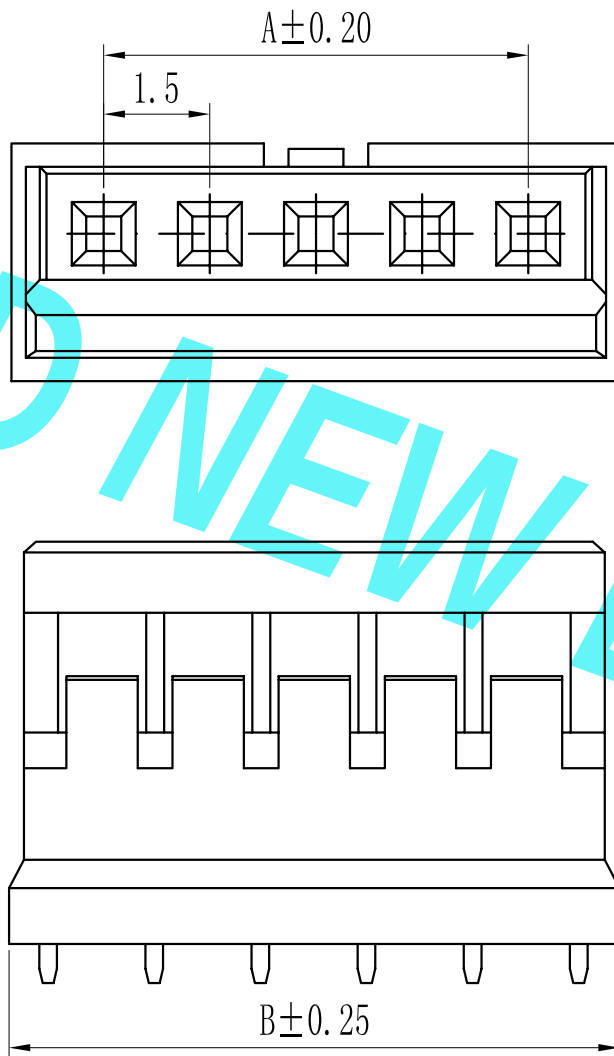

技术参数 SPECIFICATIONS

- ◆间距: 1.5 Pitch:1.5
- ◆适用线规: AWG#26-#30
Applicable Wire:AWG#26-#30
- ◆额定电压: AC,DC,100V (有效值)
Voltage rating: AC,DC,100V(rms)
- ◆额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC
- ◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 500\text{M}\Omega$
Insulation resistance: $\geq 500\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1511-XX	
				LINEAR	ANGLES					APPROVED	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.12.04	UNIT: MM	0.00±0.15	X° ±3°				DRAWN	肖丽娟	2018.12.04
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°						