

	1	2	3	4	5	6	7	8
A	环保物料							
B								
C								
D								
E								
F								
G								
H								

环保物料

Pin数	尺寸A	尺寸B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	11.50
6	7.50	13.00
7	9.00	14.50
8	10.50	16.00
9	12.00	17.50
10	13.50	19.00
11	15.00	20.50
12	16.50	22.00
13	18.00	23.50
14	19.50	25.00
15	21.00	26.50
16	22.50	28.00
17	24.00	29.50
18	25.50	31.00
19	27.00	32.50
20	28.50	34.00
21	30.00	35.50
22	31.50	37.00
23	33.00	38.50
24	34.50	40.00
25	36.00	41.50

P.C.B LAYOUT

技术参数 SPECIFICATIONS

◆间距: 1.5 Pitch:1.5

◆适用线规: AWG#26-#30
Applicable Wire:AWG#26-#30

◆额定电压: AC,DC,100V (有效值)
Voltage rating: AC,DC,100V(rms)

◆额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC

◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute

◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃

◆绝缘电阻: ≥500MΩ
Insulation resistance:≥500MΩ


◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

◆绝缘体: 尼龙66,UL94V-0
Insulator:Nylon66 UL94V-0

◆接触针: 磷青铜
Contact PIN: Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgoonne.cn 公司电话: 0769-86337633 邮箱: 2860175966@qq.com 公司传真: 0769-86392827	PART. NO: 1505-XX	
				LINEAR	ANGLES					APPROVED	
				0.0±0.25	X° REF±6°	DESIGNER				REV: AO SHEET: 1/1	
AO	新图面发行		2018.12.04	UNIT: MM	0.00±0.15	X° ±3°				TITLE: 1.50mm pitch Single Wafer	
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟		2018.12.04	

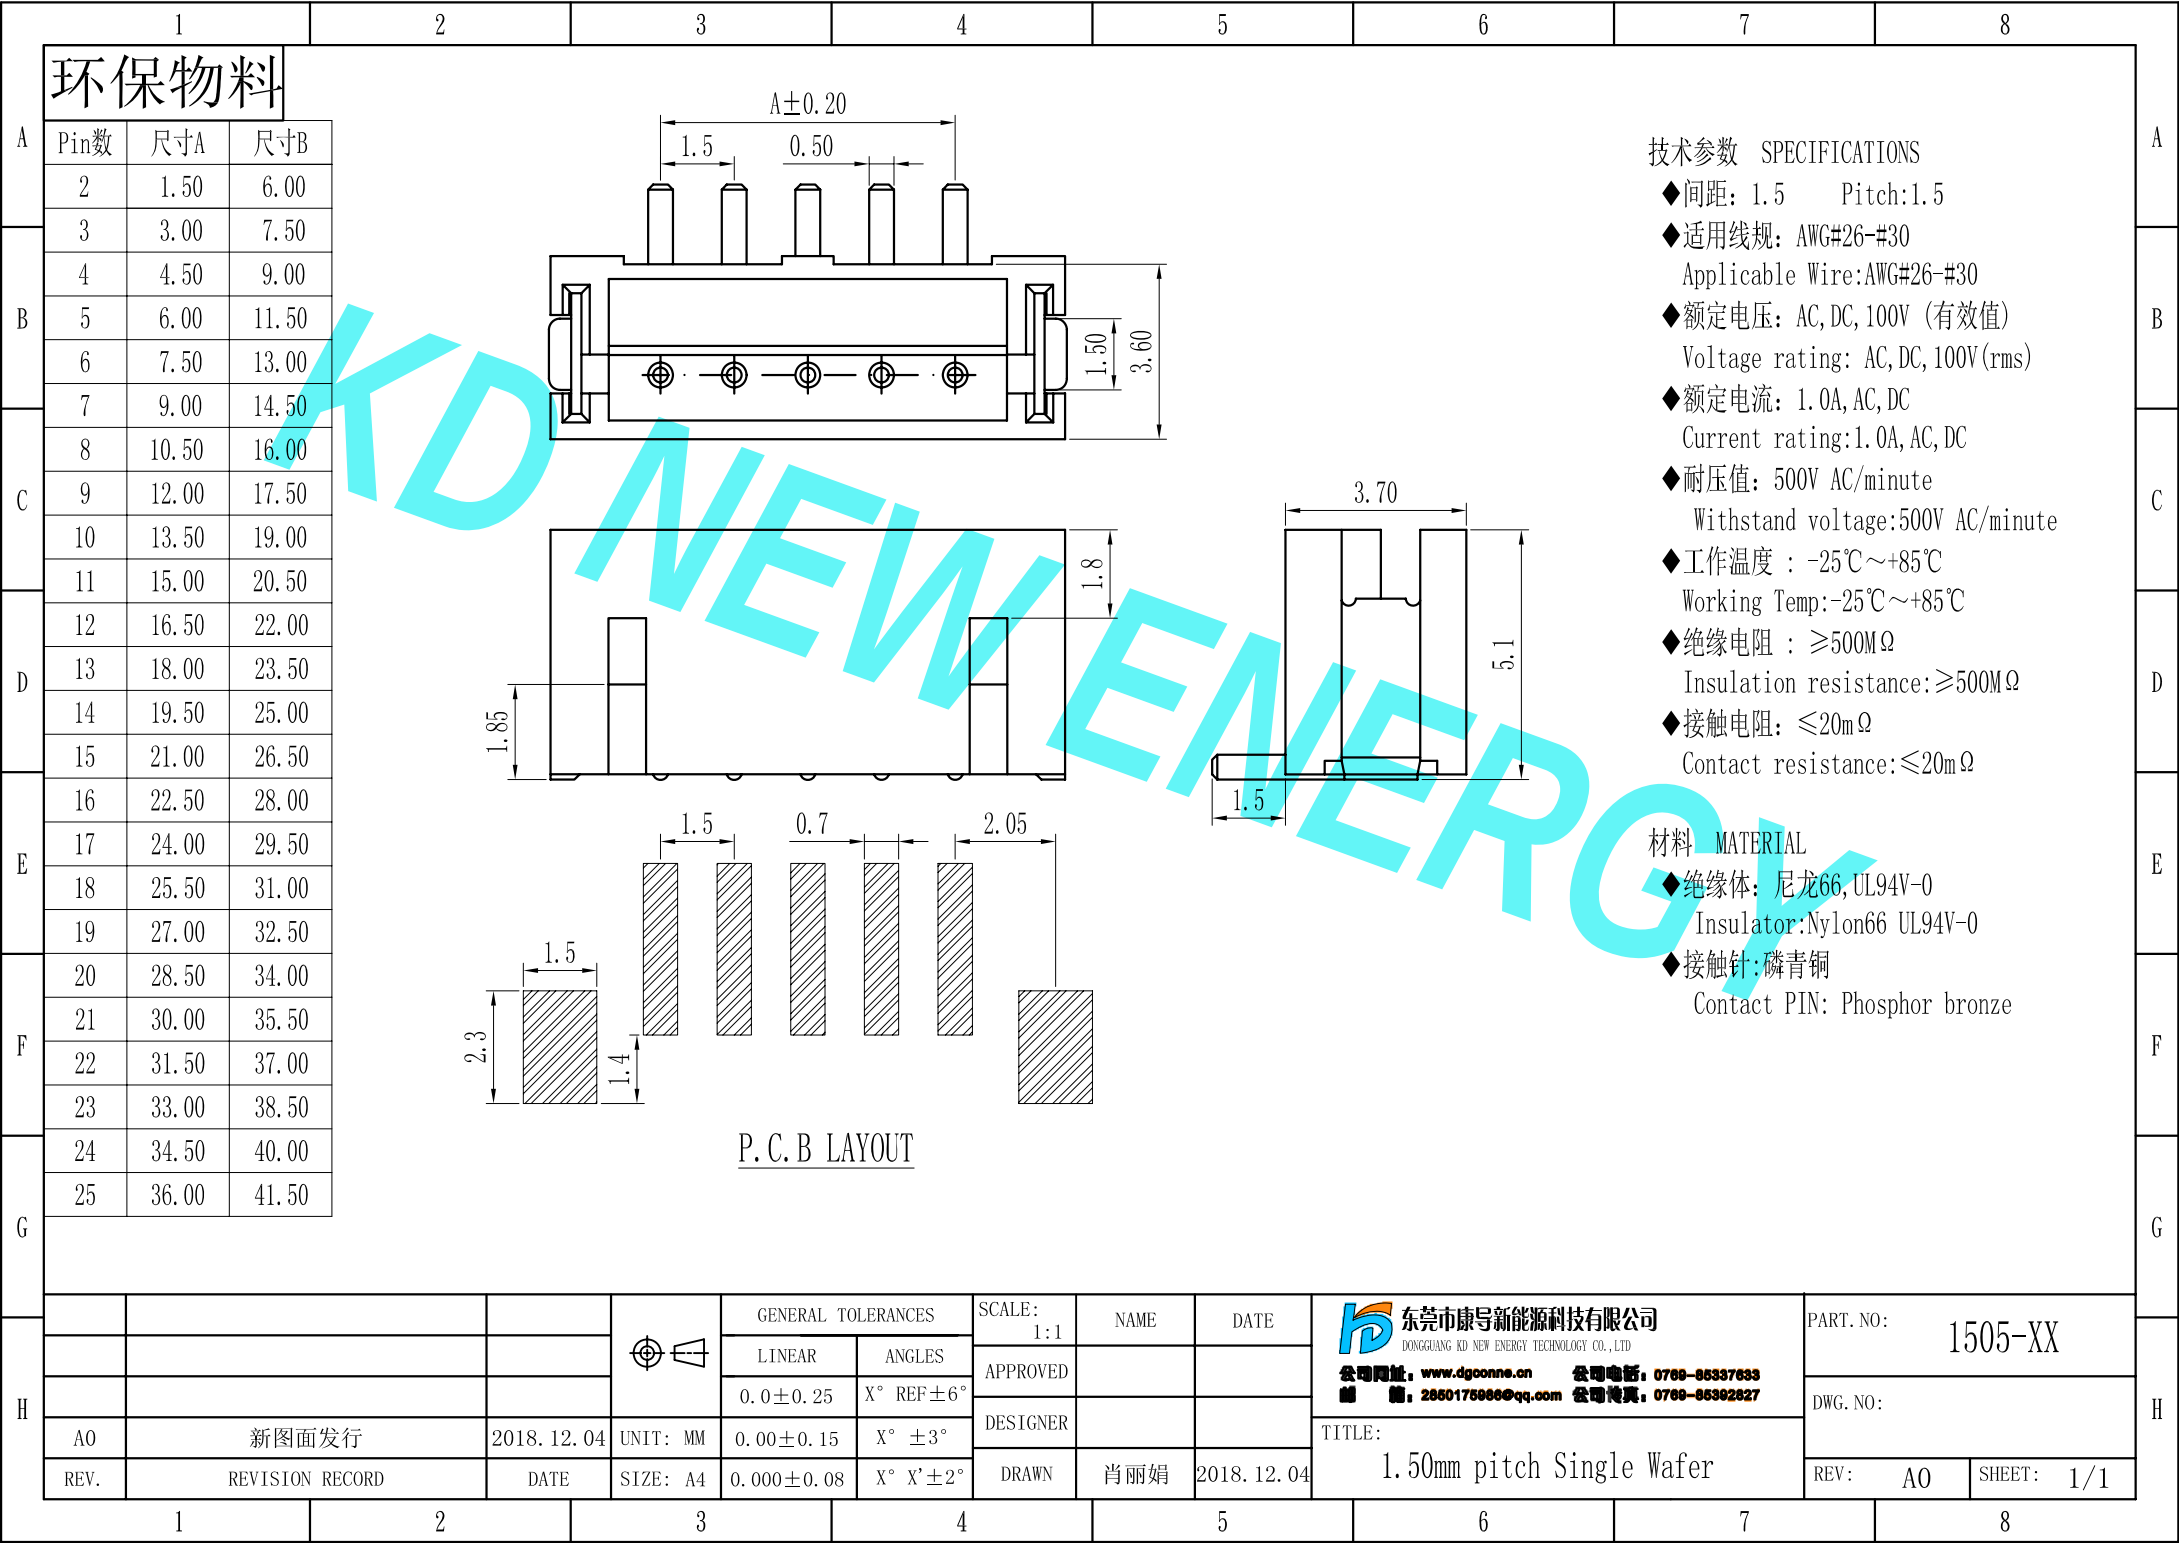

	1	2	3	4	5	6	7	8																																			
A	环保物料			P.C.B LAYOUT																																							
B	Pin数	尺寸A	尺寸B																																								
	2	1.50	6.00																																								
	3	3.00	7.50																																								
	4	4.50	9.00																																								
	5	6.00	11.50																																								
	6	7.50	13.00																																								
	7	9.00	14.50																																								
	8	10.50	16.00																																								
	9	12.00	17.50																																								
	10	13.50	19.00																																								
	11	15.00	20.50																																								
	12	16.50	22.00																																								
	13	18.00	23.50																																								
	14	19.50	25.00																																								
	15	21.00	26.50																																								
	16	22.50	28.00																																								
	17	24.00	29.50																																								
	18	25.50	31.00																																								
	19	27.00	32.50																																								
	20	28.50	34.00																																								
	21	30.00	35.50																																								
	22	31.50	37.00																																								
	23	33.00	38.50																																								
	24	34.50	40.00																																								
	25	36.00	41.50																																								
H	<table border="1"> <thead> <tr> <th>REV.</th><th>REVISION RECORD</th><th>DATE</th><th>SIZE: A4</th></tr> </thead> <tbody> <tr> <td>A0</td><td>新图面发行</td><td>2018. 12. 04</td><td>UNIT: MM</td></tr> </tbody> </table>			REV.	REVISION RECORD	DATE	SIZE: A4	A0	新图面发行	2018. 12. 04	UNIT: MM	<table border="1"> <thead> <tr> <th colspan="2">GENERAL TOLERANCES</th><th>SCALE: 1:1</th><th>NAME</th><th>DATE</th></tr> </thead> <tbody> <tr> <td>LINER</td><td>ANGLES</td><td>APPROVED</td><td></td><td></td></tr> <tr> <td>0. 0 ± 0. 25</td><td>X° REF ± 6°</td><td>DESIGNER</td><td></td><td></td></tr> <tr> <td>0. 00 ± 0. 15</td><td>X° ± 3°</td><td>DRAWN</td><td>肖丽娟</td><td>2018. 12. 04</td></tr> <tr> <td>0. 000 ± 0. 08</td><td>X° X' ± 2°</td><td></td><td></td><td></td></tr> </tbody> </table>			GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	LINER	ANGLES	APPROVED			0. 0 ± 0. 25	X° REF ± 6°	DESIGNER			0. 00 ± 0. 15	X° ± 3°	DRAWN	肖丽娟	2018. 12. 04	0. 000 ± 0. 08	X° X' ± 2°				东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-86337633 邮 箱: 2850175966@qq.com 公司传真: 0769-86392827		PART. NO: 1505-XX	
REV.	REVISION RECORD	DATE	SIZE: A4																																								
A0	新图面发行	2018. 12. 04	UNIT: MM																																								
GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE																																							
LINER	ANGLES	APPROVED																																									
0. 0 ± 0. 25	X° REF ± 6°	DESIGNER																																									
0. 00 ± 0. 15	X° ± 3°	DRAWN	肖丽娟	2018. 12. 04																																							
0. 000 ± 0. 08	X° X' ± 2°																																										
							DWG. NO:																																				
				TITLE:			REV:	A0																																			
				1.50mm pitch Single Wafer			SHEET:	1/1																																			
	1	2	3	4	5	6	7	8																																			

技术参数 SPECIFICATIONS

- ◆间距: 1.5 Pitch:1.5
- ◆适用线规: AWG#26-#30
Applicable Wire:AWG#26-#30
- ◆额定电压: AC,DC,100V (有效值)
Voltage rating: AC,DC,100V(rms)
- ◆额定电流: 1.0A,AC,DC
Current rating:1.0A,AC,DC
- ◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
- ◆工作温度 : -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻 : ≥500MΩ
Insulation resistance:≥500MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66,UL94V-0
Insulator:Nylon66 UL94V-0
- ◆接触针:磷青铜
Contact PIN: Phosphor bronze

	1	2	3	4	5	6	7	8
A	环保物料							
B								
C								
D								
E								
F								
G								
H								

- | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|-----------------|---|---|---|---|---|---|---|
| A | <div>环保物料</div> | | | | | | | |
| B | | | | | | | | |
| C | | | | | | | | |
| D | | | | | | | | |
| E | | | | | | | | |
| F | | | | | | | | |
| G | | | | | | | | |
| H | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

[illegible]

- | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|-----------------|---|---|---|---|---|---|---|
| A | <div>环保物料</div> | | | | | | | |
| B | | | | | | | | |
| C | | | | | | | | |
| D | | | | | | | | |
| E | | | | | | | | |
| F | | | | | | | | |
| G | | | | | | | | |
| H | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |