


环保物料

Pin数	尺寸A	尺寸B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	11.50
6	7.50	13.00
7	9.00	14.50
8	10.50	16.00
9	12.00	17.50
10	13.50	19.00
11	15.00	20.50
12	16.50	22.00
13	18.00	23.50
14	19.50	25.00
15	21.00	26.50
16	22.50	28.00
17	24.00	29.50
18	25.50	31.00
19	27.00	32.50
20	28.50	34.00
21	30.00	35.50
22	31.50	37.00
23	33.00	38.50
24	34.50	40.00
25	36.00	41.50

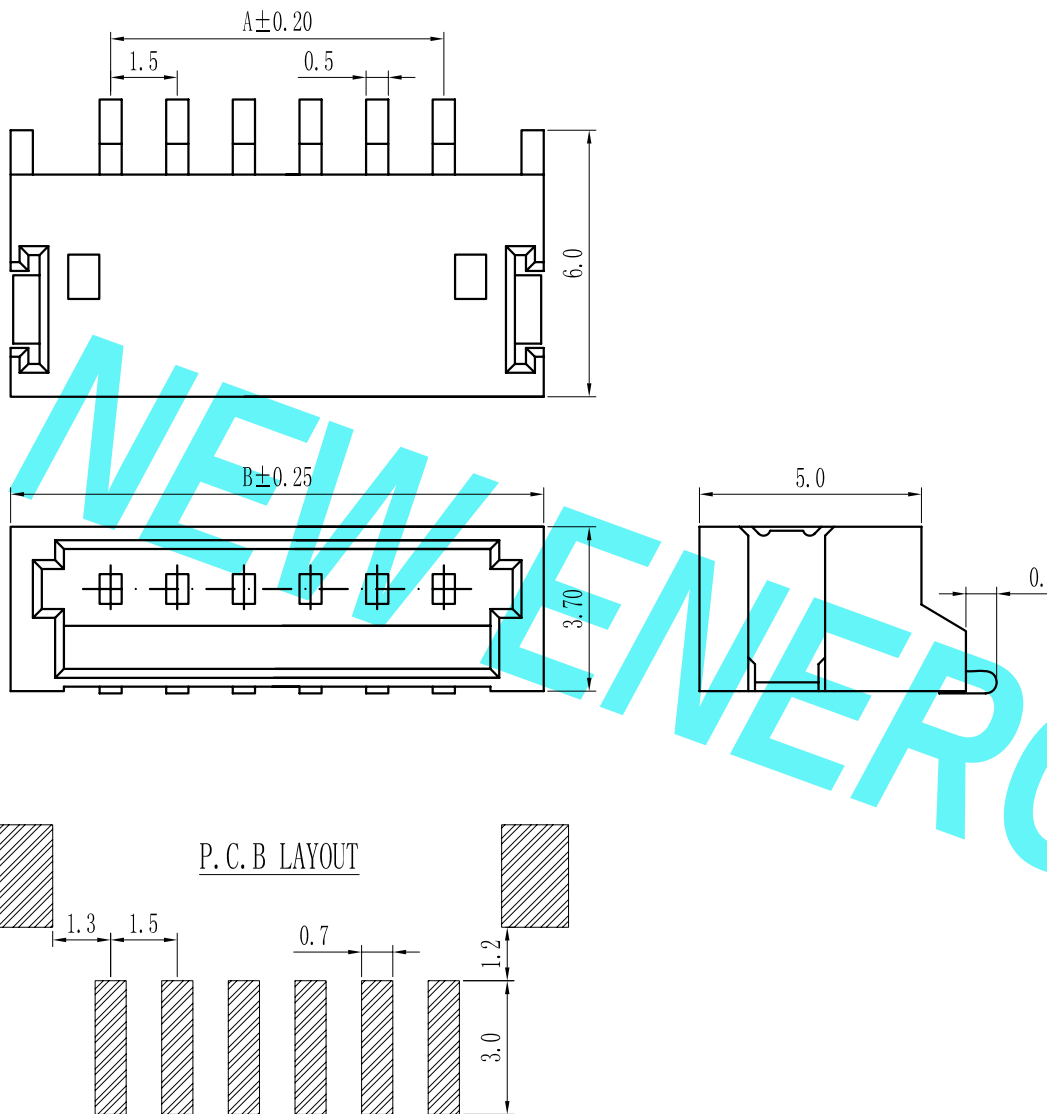

- 技术参数 SPECIFICATIONS
- ◆间距: 1.5 Pitch:1.5
 - ◆适用线规: AWG#26-#30
Applicable Wire:AWG#26-#30
 - ◆额定电压: AC,DC,100V (有效值)
Voltage rating: AC, DC, 100V(rms)
 - ◆额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC
 - ◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
 - ◆工作温度 : -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻 : ≥500MΩ
Insulation resistance:≥500MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ
- 材料 MATERIAL
- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0
 - ◆接触针:磷青铜
Contact PIN: Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1506-XX	
				LINEAR	ANGLES	APPROVED					
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018. 12. 04		UNIT: MM	0.00±0.15	X° ±3°				TITLE:	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 04		1.50mm pitch Single Wafer	
										REV: A0	SHEET: 1/1