


环保物料

Pin数	尺寸A	尺寸B
2	1.00	5.00
3	2.00	6.00
4	3.00	7.00
5	4.00	8.00
6	5.00	9.00
7	6.00	10.00
8	7.00	11.00
9	8.00	12.00
10	9.00	13.00
11	10.00	14.00
12	11.00	15.00
13	12.00	16.00
14	13.00	17.00
15	14.00	18.00
16	15.00	19.00
17	16.00	20.00
18	17.00	21.00
19	18.00	22.00
20	19.00	23.00
21	20.00	24.00
22	21.00	25.00
23	22.00	26.00
24	23.00	27.00
25	24.00	28.00

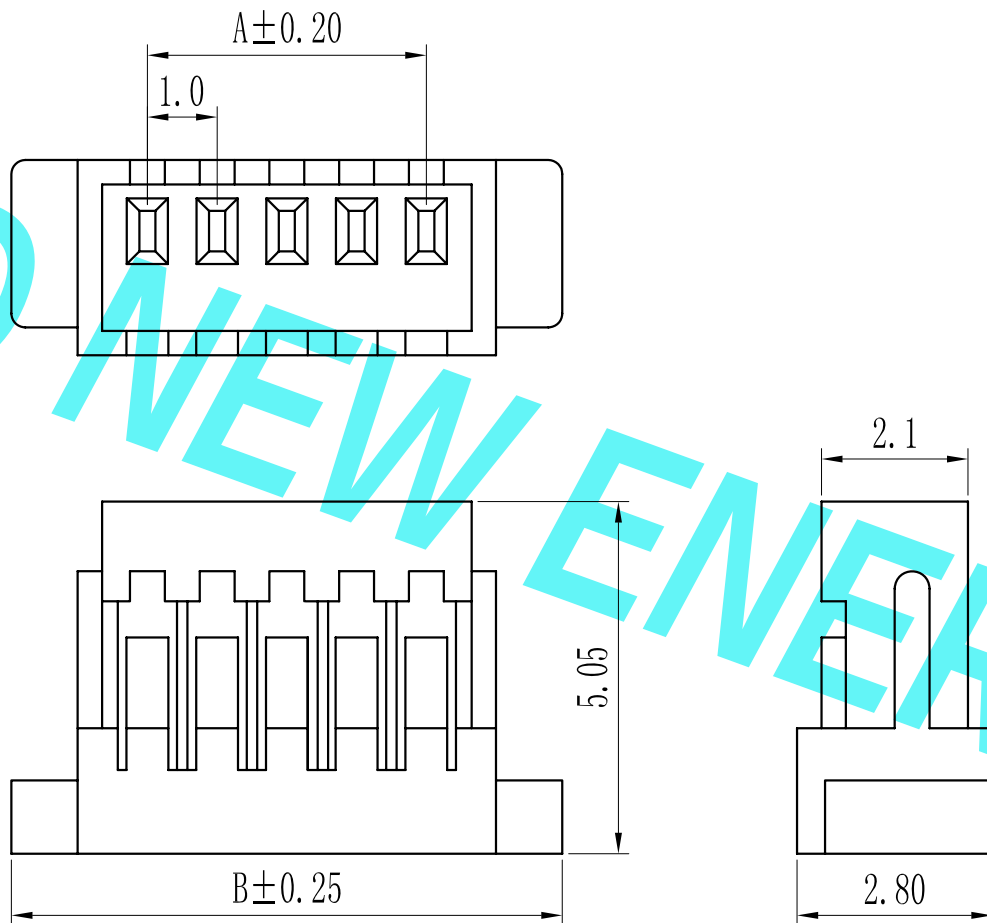

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
 - ◆额定电压: 50V DC, AC(rms)
Rated voltage: 50V DC, AC(rms)
 - ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
 - ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
 - ◆工作温度: -25℃~+85℃
Working Temp: -25℃~+85℃
 - ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ
- 材料 MATERIAL
- ◆绝缘体: 尼龙9T, UL94-V0
Insulator: Nylon9T, UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 1. 0T-1-WT (SH)	
				LINEAR	ANGLES	APPROVED					
				0. 0±0. 25	X° REF±6°	DESIGNER					
A0	新图面发行	2018. 12. 03		UNIT: MM	0. 00±0. 15	X° ±3°				TITLE: 1. 00mm pitch Single Housing	REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 03			