

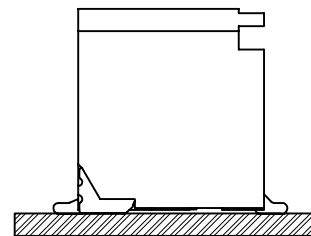
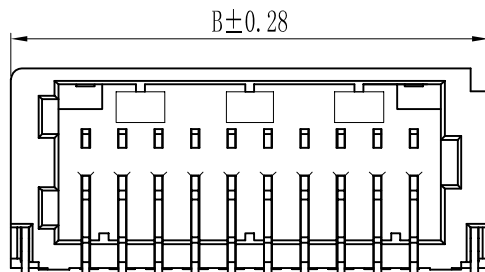


环保物料

Pin数	尺寸A	尺寸B
4	3.00	7.10
6	5.00	9.10
8	7.00	11.10
10	9.00	13.10
12	11.00	15.10
14	13.00	17.10
16	15.00	19.10
18	17.00	21.10
20	19.00	23.10
22	21.00	25.10
24	23.00	27.10
26	25.00	29.10
28	27.00	31.10
30	29.00	33.10
32	31.00	35.10
34	33.00	37.10
36	35.00	39.10
38	37.00	41.10
40	39.00	43.10
42	41.00	45.10
44	43.00	47.10
46	45.00	49.10
48	47.00	51.10
50	49.00	53.10

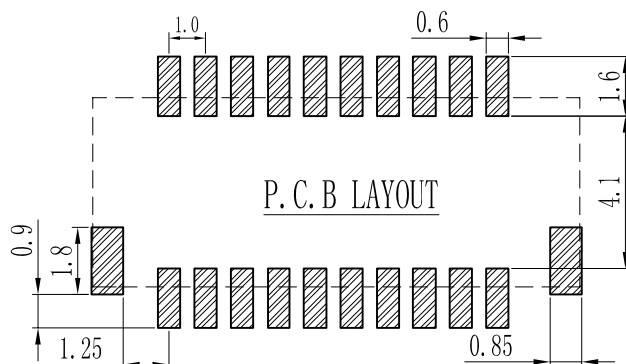

Assembly Layout

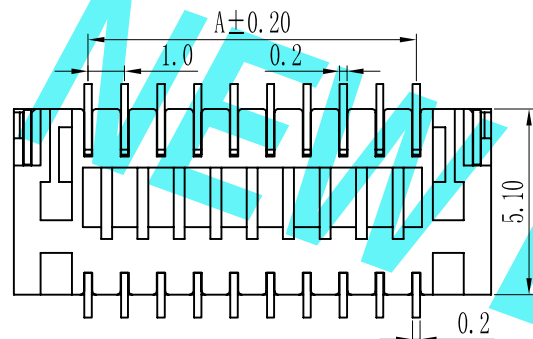

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 50V DC, AC(rms)
Rated voltage: 50V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance:≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙9T, UL94-V0
Insulator:Nylon9T, UL94-V0
- ◆接触针: 磷铜
Contact PIN: Phosphor bronze
- ◆焊片: 磷铜
Solder tab: Phosphor bronze

REV.	新图面发行	2018. 12. 03	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	REV:	SHEET:
				LINEAR	ANGLES							
A0	新图面发行	2018. 12. 03	UNIT: MM	0.00±0.15	X° ±3°	APPROVED			1.0T-1-WT(SHD)-2NA			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DESIGNER						
						DRAWN	肖丽娟	2018. 12. 03				

东莞市康号新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD
公司网址: www.dgoonne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:
1.00mm pitch Dual Wafer