


环保物料

Pin数	尺寸A	尺寸B	尺寸C
2*5	4.00	7.30	7.20
2*10	9.00	12.30	12.20
2*15	14.00	17.30	17.20
2*20	19.00	22.30	22.20
2*25	24.00	27.30	27.20

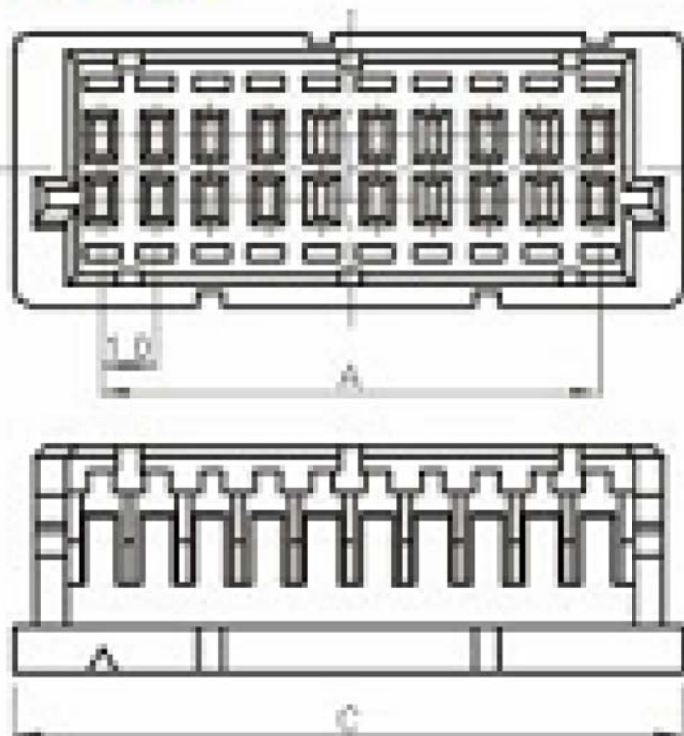

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 100V DC, AC(rms)
Rated voltage: 100V DC, AC(rms)
- ◆额定电流: 0.9A(AWG #28)
Rated Current: 0.9A(AWG #28)
- ◆耐压值: 300V AC/minute
Withstand voltage: 300V AC/min
- ◆工作温度: -35℃~+85℃
Working Temp:-35℃~+85℃
- ◆绝缘电阻: 500MΩ Min
Insulation resistance:≥500MΩ
- ◆接触电阻: ≤40mΩ
Contact resistance:≤40mΩ

材料 MATERIAL

- ◆外壳(Y座): 尼龙66
Housing:Nylon66
- ◆针座: 尼龙66
Water: Nylon66
- ◆接触件: 磷青铜 镀金
Contact: Phosphor bronze Gold-plated
- ◆接地片: 青铜 镀锡
Solder Tab:Bronze Tin-plated
- ◆端子: 磷青铜 镀金
Termianl:Phosphor bronze Gold-plated

包装方式 PACKAGE

- ◆编带包装 Tape and Reel Package
- ◆管装 Pipe Package
- ◆袋装 Bag Package

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°	APPROVED		
A0	新图面发行	2018.12.03		0.00±0.15	X° ±3°	DESIGNER		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.03

 东莞市康导新能源科技有限公司
DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD
公司网址: www.dgkonne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:
1.00mm pitch Dual Housing

PART. NO: 1.0T-3-NY	
DWG. NO:	
REV: A0	SHEET: 1/1