
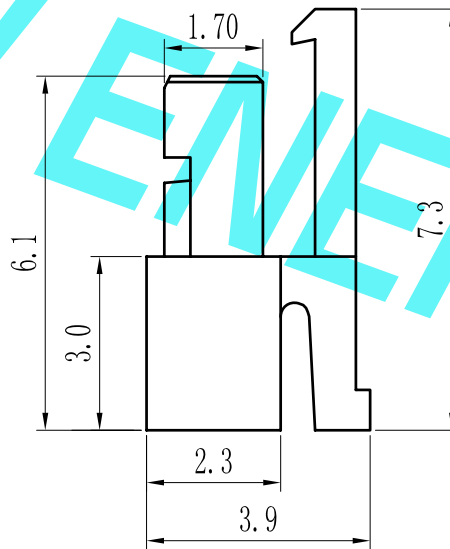


环保物料

Pin数	尺寸A	尺寸B
2	1.00	3.00
3	2.00	4.00
4	3.00	5.00
5	4.00	6.00
6	5.00	7.00
7	6.00	8.00
8	7.00	9.00
9	8.00	10.00
10	9.00	11.00
11	10.00	12.00
12	11.00	13.00
13	12.00	14.00
14	13.00	15.00
15	14.00	16.00
16	15.00	17.00
17	16.00	18.00
18	17.00	19.00
19	18.00	20.00
20	19.00	21.00
21	20.00	22.00
22	21.00	23.00
23	22.00	24.00
24	23.00	25.00
25	24.00	26.00

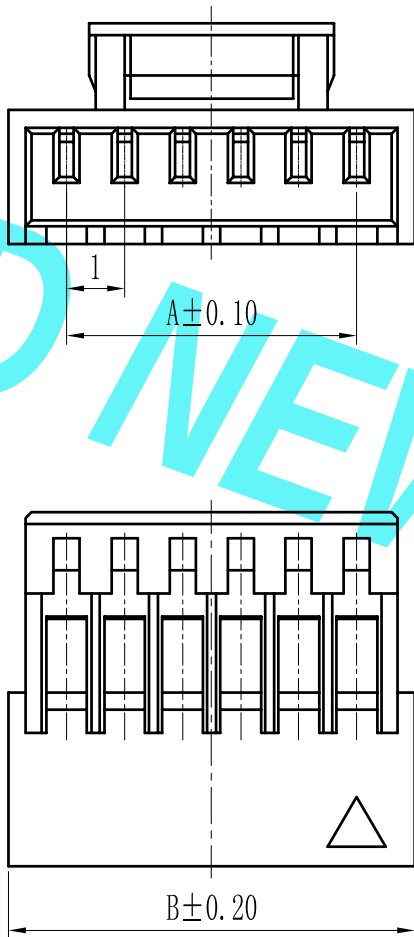

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 50V DC, AC(rms)
Rated voltage: 50V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance:≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆胶壳: PBT, UL94-V0
Housing:PBT, UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: NHS-NY	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.12.03		UNIT: MM	0.00±0.15	X° ±3°				TITLE: 1.00mm pitch Single Housing	REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.03			